

THE ADVANTAGE OF VAST QUANTITIES IN MINIMUM TIME



Amazon Ready At-a-glance

VAST DIMENSION



R2200 grey callen R2202 blue arot R2206 gold lights R2205

RAZE NYLON


PAGE 32

COLOR POP

BRIX NYLON **BLOCK** R27-4151 R27-4152 R27-4153 R26-2401 R26-2402 R26-2404 R26-2405 R26-2409 day break R27-4154 R27-4155 R27-4156 R26-2406 R26-2507 merry peach gilded gold sterling silver PAGE 36 R26-2508 R26-2509 R26-2510 midnight dust java brew dusky coal



FIRST SENSE

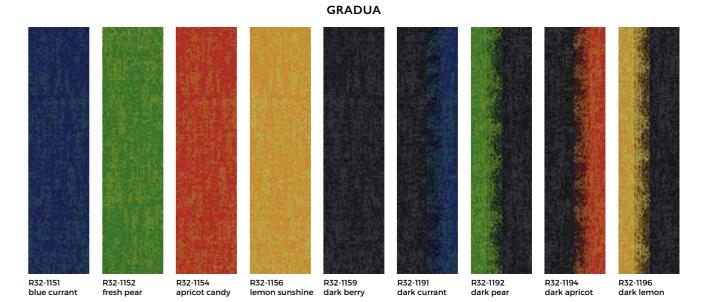

PAGE 52



PAGE 56

INTER GALAXY

ASTRO NYLON SPACE R25-6301 R25-6302 R25-6303

PAGE 62

R23-1041 R23-1042 R23-1043 lightyear yellow laser red galactic green

PAGE 64




PAGE 66

NEXT GEN



PAGE 72

MYTHIC CHROMA

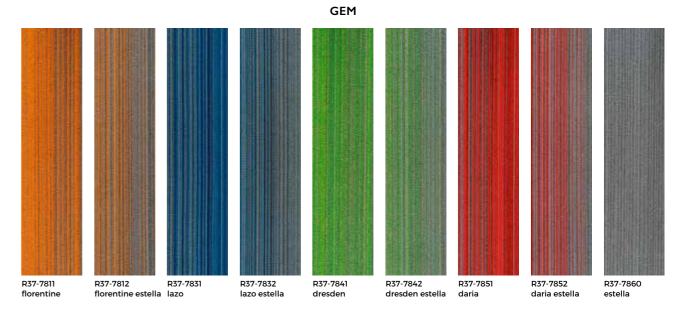


PAGE 78




PAGE 82

STAR LITE

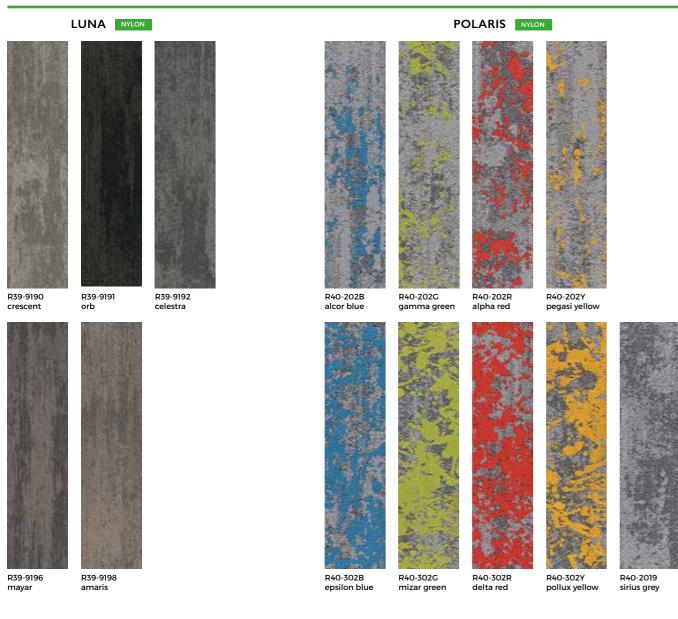

PAGE 86 PAGE 88

RHYTHM RHAPSODY

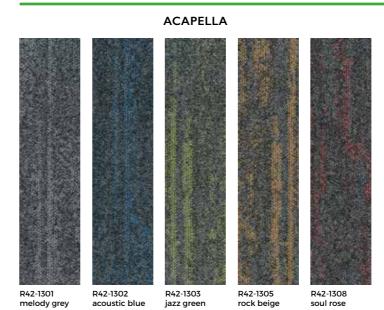

CONCERTO



R41-1220 blue trebel


R41-1208 grey octave

R41-1239 dust bass

R41-1245 beige tempo

PAGE 94

PAGE 92

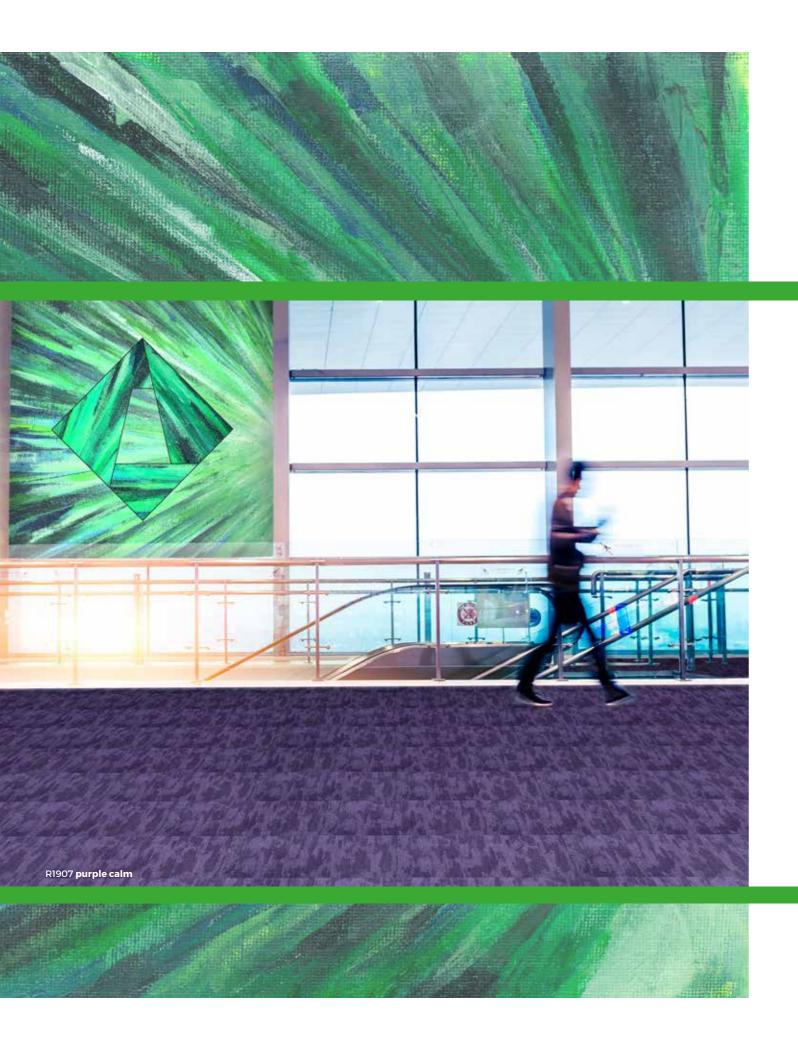

Experience Efficiency

DISCOVER A COLLECTION THAT'S READY, WHENEVER YOU ARE

When there is a need for vast quantities and swift delivery, the Amazon Ready Collection is truly the way to go forward. It features over 100 stunningly varied styles from 8 distinctly vibrant series; delivered in minimum time for maximum project efficiency.

Ideal for demanding, high-volume installations; the Amazon Ready Collection is a fusion of eclectic patterns, exciting colours and superior backing quality at price points for virtually any application or imagination. Each and every tile is also backed by the assurance of exceptional quality and leading environmental certifications.



Benefits

1

Enjoy exceptional reliability with total stock levels that exceed over 200,000 square metres

2

A choice of both high-quality
Polypropylene (PP) and Nylon yarns, as
well as various backing options for specific
applications

3

Made using fully-automated processes and stringent quality control, resulting in unmatched performance features

4

Up to 15 years Limited Wear Warranty under normal use for the assurance of a superior quality product

5

Contains post-consumer recycled material, which contributes to the sustainability of resources and lower output of waste

5

Constant R&D to improve tufting techniques, elevate quality and offer better value for money

Outstanding Performance Under Your Feet



PrecisionMax™ MADE FOR PRECISE, SEAMLESS FINISH

Amazon carpet tiles are produced under stringent, fully-automated processes to ensure every tile is close to the exact measured specification. This enables the tiles to be easily installed without gaps or ridges, resulting in a seamless end finish.



WearLoc[™] INNOVATIVELY TOUGH

On the surface, Amazon carpet tiles are plush and soft-to-the-touch. But within lies attributes that can withstand the demands of daily use. The smart fusion of select yarns with tough backings, along with sturdy tufting delivers carpets that look new and last longer.



HushTech™ THE TECHNOLOGY FOR ADDED SILENCE

All Amazon carpet tiles are inherently quiet underfoot, yet HushTech makes them that much better at absorbing impact and dissipating vibrations. It is a technology that pairs thick acoustically-enhanced backings – called Hush Back – within the layers of tiles for remarkable sound dampening capabilities, in addition to exceptional underfoot comfort.



FiberLogic™ OUALITY YARNS FROM THE WORLD'S BEST

When it comes to carpet flooring, the yarn makes all the difference. Every carpet has to meet standards of beauty, stain resistance, wear resistance and overall toughness.

At Amazon, we only use superior fibers from reputed makers such as Antron®, Invista™, Universal® Fibers,

Aquafil and DuPont®.



SmartResist™ ACTIVE MOLECULAR STAIN RESISTANCE

Constructed with fibers that actively resist stains, spills, dirt and grime; Amazon carpets ensure life's little mishaps stay little. All it takes is gentle scrubbing to remove even tough stain culprits such as coffee, ink, cola and lipstick.



FireResista™ FLAME-RESISTANCE CERTIFIED

Amazon carpets have undergone scrutiny by the
American Society for Testing & Materials (ASTM) and passed
stringent flooring fire resistance tests. This means our carpets are
better at resisting flames and will defy the spread of
fire more effectively.



BreatheEZY™ IMPROVED AIR QUALITY

Amazon carpet tiles are effective at trapping airborne dust, allergens and particles. Combined with regular vacuuming and the fact that our carpets are low-VOC certified, indoor air stays clean and healthy.



VariSize™ MULTI SIZE OPTIONS

Amazon Ready carpet tiles are available in various optional sizes – such as 50cm × 50cm, 60cm × 60cm, 100cm × 100cm, 50cm × 100cm, 18"x 18", 36"× 36" and 18"× 36" – for unique and exciting flooring configurations.



EcoSense[™] SUSTAINABILITY IN EVERY TILE

Amazon is always committed to environmental compliance and sustainable manufacturing practices.

Aside from using recycled content, we are also:

- Green Label Plus compliant for low emissions of VOC by The Carpet & Rug Institute (CRI)
 - Singapore Green Label certified for stringent standards in environmental friendliness
 - Manufactered in accordance to ISO14001:2004 Environmental Management System



RavelStop™ EVERY YARN LOCKED IN PLACE

Even in the unlikely event of a loose yarn, Amazon's unique interlocking tufting method ensures it will never ravel or zipper. A multi-layered construction featuring resilient non-woven material, along with options such as fibreglass, bitumen and PVC layers make for a firm yarn lock. A final layer of high-density non-woven cushion then seals the package for superior lamination strength.

Backed by Innovation in Performance and Environmental Consciousness

How a carpet tile performs on top is very much dependent on what's underneath. Amazon's range of backings has been formulated and tested to provide enhanced durability and excellent dimensional stability, while ensuring superior resistance to heat and moisture. Our backing systems also feature recycled content, emphasising our efforts in promoting sustainability and care for the environment.



- Sturdy, 4-layer construction for improved dimensional stability and fibreglass reinforcement for added strength
- Eco Durable layer made with recycled materials for lower environmental impact
- Flame-resistant and stable in extreme temperatures and humidity
- Resistant to liquids and regular professional wet cleaning; will not curl up or deform



- Enhanced for superior sound absorption and underfoot comfort
- Extra cushion padding material offers added comfort without diminishing underfoot stability
- Sturdy, 4-layer construction that grips the floor effectively
- Flame-resistant and stable in extreme temperatures and humidity
- Resistant to liquids and regular professional wet cleaning; will not curl up or deform
- Low environmental impact as it is biodegradable and recyclable



HushTech™ Acoustics

Specifically developed to reduce the noise distractions in modern offices, the acoustic technology that goes into our backing improves noise absorption at the sound molecule level. It is designed to absorb and dissipate foot traffic noise, speech frequencies and environmental sound waves, while providing excellent sound insulation in indoor spaces.





reLoop Initiative


While most manufacturers only claim recycled content in their products, we go the extra step to provide channels for our end-of-lifecycle products to be recycled or reused. This is how we close the loop, and then reLoop materials to reduce new resource dependency and contribute to overall sustainability in operations.

Size Matters

Varying tile sizes allow for unique and exciting flooring configurations. Amazon Ready carpet tiles are available in various optional sizes in addition to the standard $50 \, \text{cm} \times 50 \, \text{cm}$ tile.

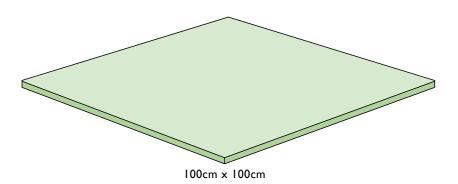

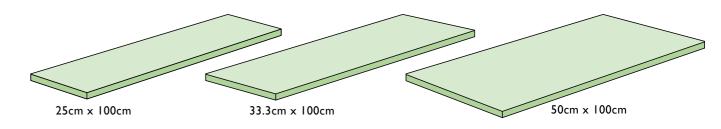

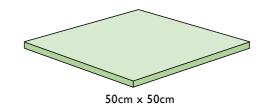



All optional sizes are available in any of our Backing Systems, including FibraTuff BackTM and FibraCush BackTM.



Performance Tested, Quality Certified

We're Serious About Quality For Your Peace-Of-Mind

Every product that carries the Amazon name is manufactured to exacting standards and stringent adherence to today's discerning demands of quality. But our dedication to quality extends way beyond just a simple promise as every production batch is performance tested mimicking real-life scenarios. Our very own AMZ+ Certification programme pools the resources of various independent testing labs to ensure our products are safe, fit for use and meet specific quality criteria. Tests are conducted on all critical floor covering aspects, which includes:

- Construction
- Wear Resistance
- Stain Resistance
- Yarn Strength
- VOC Content
- Flammability
- Electrostatic Discharge
- Colorfastness
- Backing Composition
- Dimensional Stability

When you see an AMZ+ Certification, it means you can expect top-performing carpet tiles and vinyl tiles that will provide year-after-year of worry-free use. It's more than just a symbol of quality, it's a testament to our commitment to deliver the very best.



Maximum Creative Freedom

Let Your Design Ideas Transform Into Stunning Carpet Tiles

Sometimes, no amount of mixing and matching can deliver the specific look and feel you want to achieve. You can now draw on your inspirations and bring them to life with Amazon CarpetCraft.

JUST 500M² MINIMUM ORDER TO DESIGN YOUR VERY OWN CARPET TILE

No matter how you are inspired – be it a photograph or a piece of fabric, perhaps even your natural surrounding – we can take your idea and turn it into a unique carpet tile design. Virtually anything is possible and all for a minimum order quantity of 500M².

But that's not all. Custom design also means customising other aspects of your carpet tile, including:

- · Backing: set specific requirements such as material, construction and recycled content
- Size: from small squares to wide planks, your carpet tile can be made to virtually any size
- Shape: push the creative boundary with exciting new shapes such as hexagons, trapeziums and more

From discussing initial ideas and sample pieces to production and delivery, every custom project goes through tried and tested methods to ensure the final product lives up to your exacting demands.

Ideate, create, make. Expressing your creativity has never been this easy, available exclusively with Amazon CarpetCraft.



The Carpet Tiles Advantage

Carpet tiles are certainly a viable flooring option for virtually any application; be it corporate, commercial, retail or residential. In its 50-year existence, carpet tiles have grown in stature and can be seen decorating the floors of some of the world's most iconic properties.

Today, advanced manufacturing technology has paved the way for outstandingly superior and feature-packed carpet tiles that deliver valuable benefits:

IT'S MODULAR

The nifty size of each carpet tile means it is easy to handle and can be installed in stages, as well as around furniture. If a spill or soiling occurs in future, the affected tile can be simply removed and cleaned or replaced entirely.

PORTABLE

Carpet tiles come in easy to carry boxes, which can be transported in stacks or even vertically. They can also be stored with ease, without special needs, for long periods of time.

COST EFFECTIVE

Most carpet tiles can be installed on top of other solid flooring such as laminate, vinyl or ceramic tiles without the need for expensive underlay. This saves much sub-floor prep work and ultimately installation investment.

CREATIVE FREEDOM

Each tile represents a new design idea. Unique and trendy looks can be achieved by mixing and matching tiles of different colours and patterns. There are hundreds if not thousands of design possibilities, limited only by the imagination.

REMOVE & REUSE

Carpet tiles do not have to be permanently installed. They can also be loose laid, making them easily removable and re-installed at a new location without much hassle.



If it's Cheap, There's a Reason

Going cheap could cost you in the long run. If you ever consider buying cheaper, lower quality carpet tiles; the hidden costs could far outweigh the lower price you pay.



I. LACK OF SEAMLESSNESS

When you see clear join-lines and uneven carpet tiles, it may not be entirely due to a substandard installation. Cheaper carpet tiles are often not cut to exact size and usually are of a lower pile density, making small imperfections obvious. Amazon carpet tiles however are made for a precise, seamless finish with PrecisionMax™ Technology and are inherently of higher pile density so that minor imperfections are well concealed.

4. DIFFICULT TO REMOVE STAINS

All types of carpets are prone to staining, but the ability to easily remove tough stains makes all the difference. Cheaper carpet tiles are made of low quality fibres that soak-up stains without any degree of resistance. Amazon carpet tiles features SmartResist™ Technology, where the fibres actively resists stains, spills, dirt and grime; making clean-up a hassle-free affair.

2. UNABLE TO WITHSTAND UNRAVELLING

A single loose yarn can cause a whole tile to ravel or zipper, contributing to premature aging and wear. This is usually caused by substandard tufting techniques and the use of cheap polyester material as the primary backing. Amazon carpet tiles however features RavelStopTM, a unique interlocking tufting method combined with superior bonding technology using a high-grade non-woven material as the primary backing that prevents unravelling from loose yarns.

3. PRONE TO CURLING

Curling is a problem when edges of carpet tiles come up off the floor, which makes the floor look uneven and visually distracting. Usually, this is caused by low quality carpet tiles that are thinner and lighter by nature. Amazon carpet tiles are inherently thicker and come with heavier backings, which effectively lays flat with lower incidences of curling.

5. LOWER FIRE RESISTANCE

Effective fire resistance is an important aspect for any commercial flooring installation. Cheaper, low-quality carpet tiles are usually not tested for their ability to resist fire. Amazon carpet tiles however conforms to fire resistance standards as tested by the American Society of Testing & Material (ASTM).

6. HIGHER VOC CONTENT

Carpets are inherently low in VOCs amongst all commercial flooring options. However, carpet tiles that are made from cheap yarns and substandard backing materials can emit VOC levels that are well beyond the benchmark level. Amazon carpet tiles are low-VOC certified and conform to CRI's Green Label Plus standards.







The Green Side of Amazon Carpet Tiles

When it comes to our commitment to eco-friendliness, sustainability and efficient use of resources — we walk the talk. We do it not because we have to, but because we care about making a positive environmental impact now, and for generations to come.

At Amazon, we take strategic steps and aggressively research, develop and implement new ways to ensure our carpet tiles continuously lives up to its green credentials. From recycling efforts and production enhancements to heavy investment

in research and development; we are dedicated to support the creation of a greener future.

Our efforts have also resulted in 'green ratings' from reputed certification organisations, underlining our commitment towards the preservation and conservation of the environment.

IMPROVED INDOOR AIR OUALITY

Since we spend approximately 90% of our time indoors, reduced emissions of Volatile Organic Compounds (VOCs) have become a critical consideration in choosing the right carpet tiles. At Amazon, we go to great lengths to ensure that all our carpet tiles are constructed with materials that conforms to international standards of low VOC emissions.

REDUCED ENVIRONMENTAL IMPACT

We take constant, concerted and consistent measures to only offer carpet tiles that lives up to our strict requirements of environmental compliance and sustainability. From industry-leading recycled content and reduced health impact to energy efficient manufacturing and raw material composition; the products that carry our name is your assurance that it contributes to a clean, healthy and and sustainable future.

ENERGY EFFICIENT MANUFACTURING

At Amazon, we believe in efficiency and accuracy. This means our production processes are optimised for maximum output and minimum waste, while ensuring quality is never compromised. Over the years, we have consciously made the effort to reduce our carbon footprint, and invested in cutting-edge manufacturing techniques that has improved efficiency.

CRI GREEN LABEL PLUS

Indoor Air Quality Certified for Low VOC Emissions by the Carpet and Rug Institute



SINGAPORE GREEN LABEL

Certified for Lower Environmental Impact by the Singapore Environment Council contributing to a healthy and sustainable future




ISO 14001:2004

for Environmental Management System in Manufacturing





REVEL

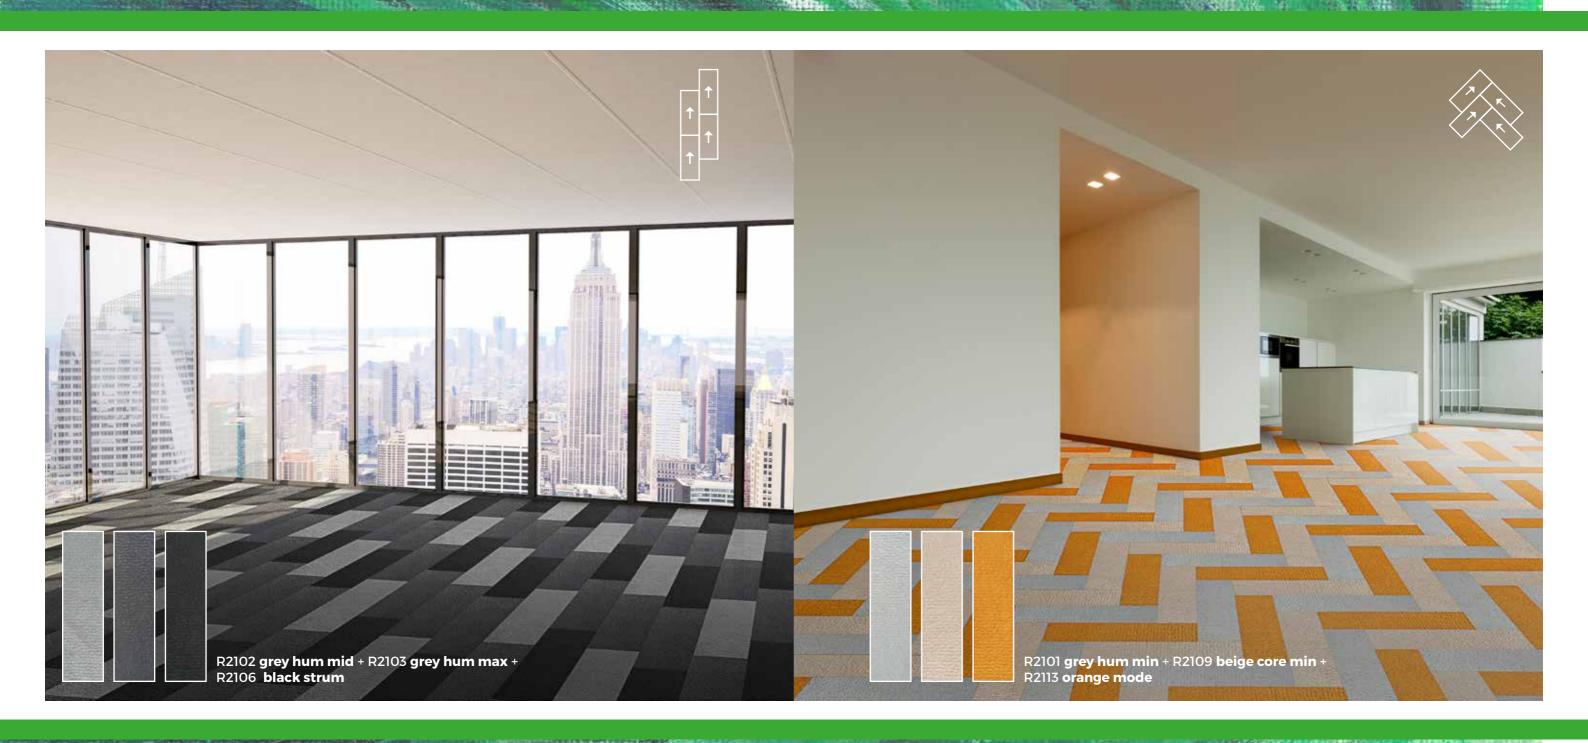

SPECIFICATIONS

Fibre 100% Solution Dyed Olefin 3/4/6mm High-low Tip Sheared Loop Pile Construction **Recycled Content**

10%

Pile Weight ca. 880g/m² (26 oz/y²) **Total Weight** ca. 3446g/m² (102 oz/y²) Pile Height ca. 3mm / 0.5mm

28

Total Height Backing No. of Tiles/Box **Standard Size**


ca. 8mm FibraTuff Back™ 20 pcs (5m²) 25cm x 100cm

Recommended Usage Installation Method Warranties

29

Medium Contract Ashlar or Herringbone 5-year Limited Wear Warranty Lifetime Antishock Carpet Warranty

REVEL

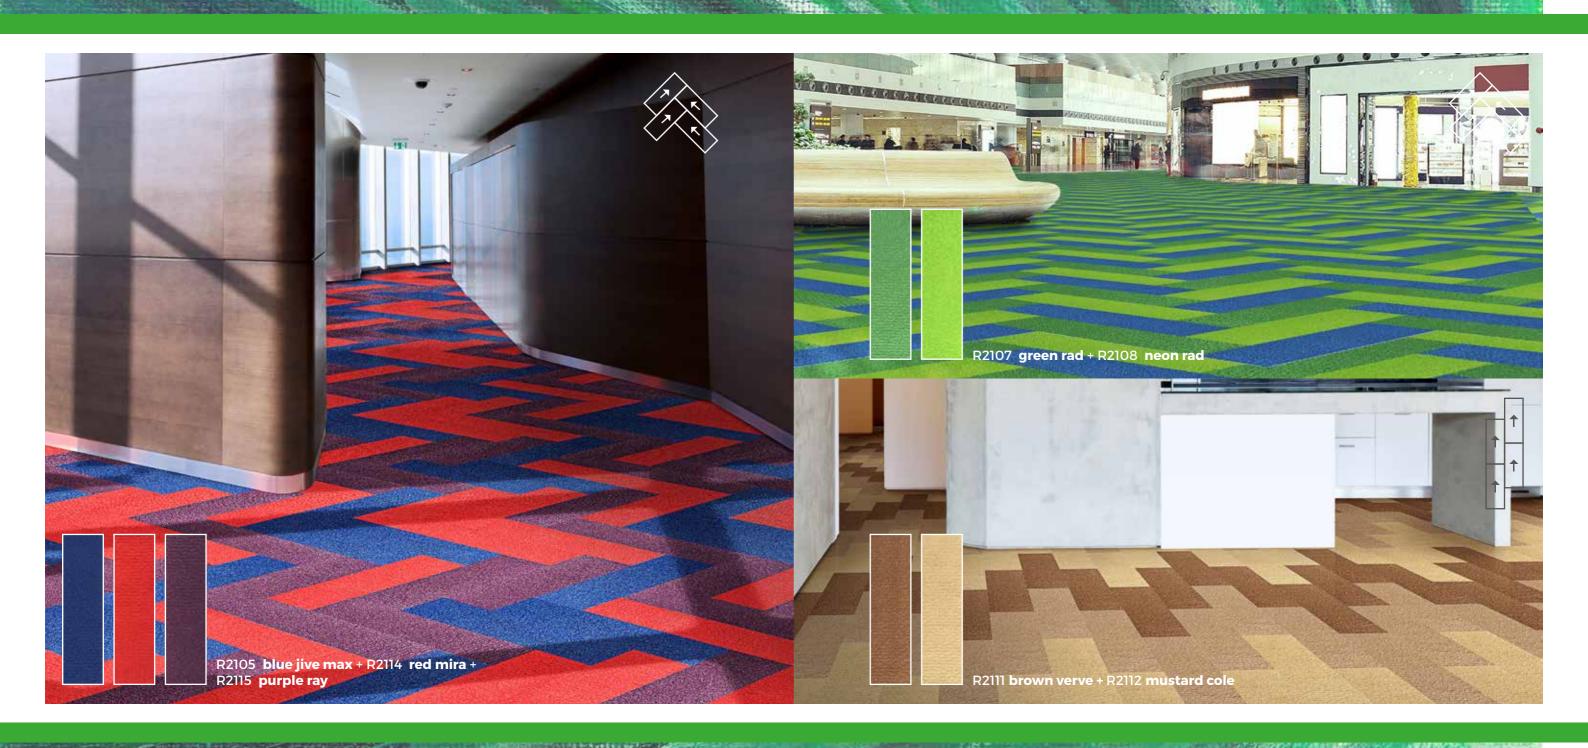

SPECIFICATIONS

Fibre 100% Solution Dyed Olefin 3/4/6mm High-low Tip Sheared Loop Pile Construction **Recycled Content**

10%

Pile Weight Total Weight Pile Height

ca. 880g/m² (26 oz/y²) ca. 3446g/m² (102 oz/y²) ca. 3mm / 0.5mm


Total Height Backing No. of Tiles/Box **Standard Size**

ca. 8mm FibraTuff Back™ 20 pcs (5m²) 25cm x 100cm

Recommended Usage Installation Method Warranties

Medium Contract Ashlar or Herringbone 5-year Limited Wear Warranty Lifetime Antishock Carpet Warranty



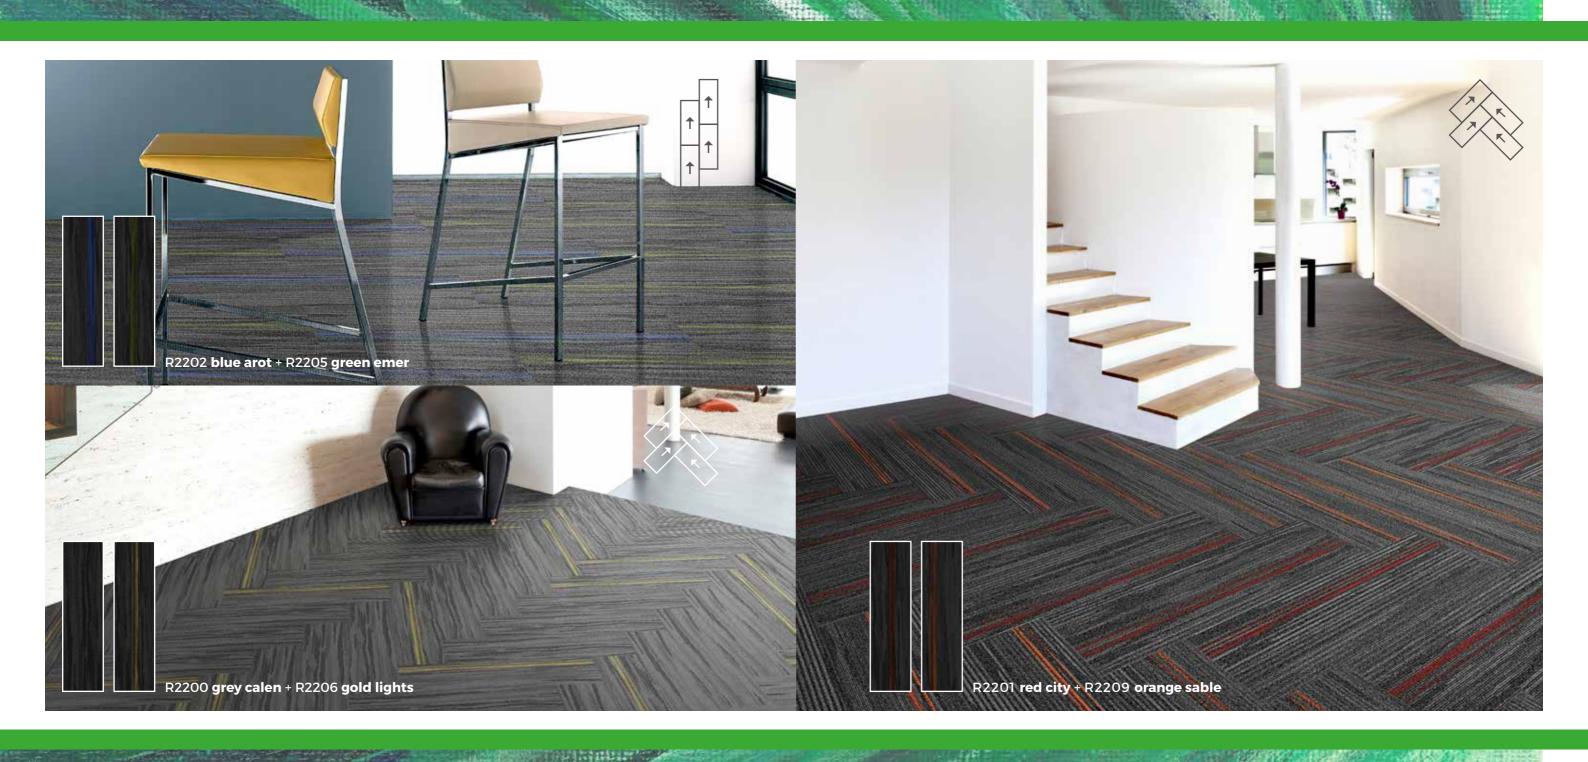

SPECIFICATIONS

Fibre Construction **Recycled Content**

Invista® Nylon 6 1/12" Multi-Level Loop Pattern

10%

Pile Weight **Total Weight** Pile Height


ca. 815g/m² (24oz/y²) ca. 3500g/m² (103oz/y²) ca. 4mm (± 0.5mm)

Total Height Backing No. of Tiles/Box Standard Size

ca. 7mm (± 0.5mm) FibraTuff Back™ 20 pcs (5m²) 25cm x 100cm

Recommended Usage Installation Method Warranties

Heavy Commercial Ashlar or Herringbone 10-year Limited Wear Warranty Lifetime Antishock Carpet Warranty

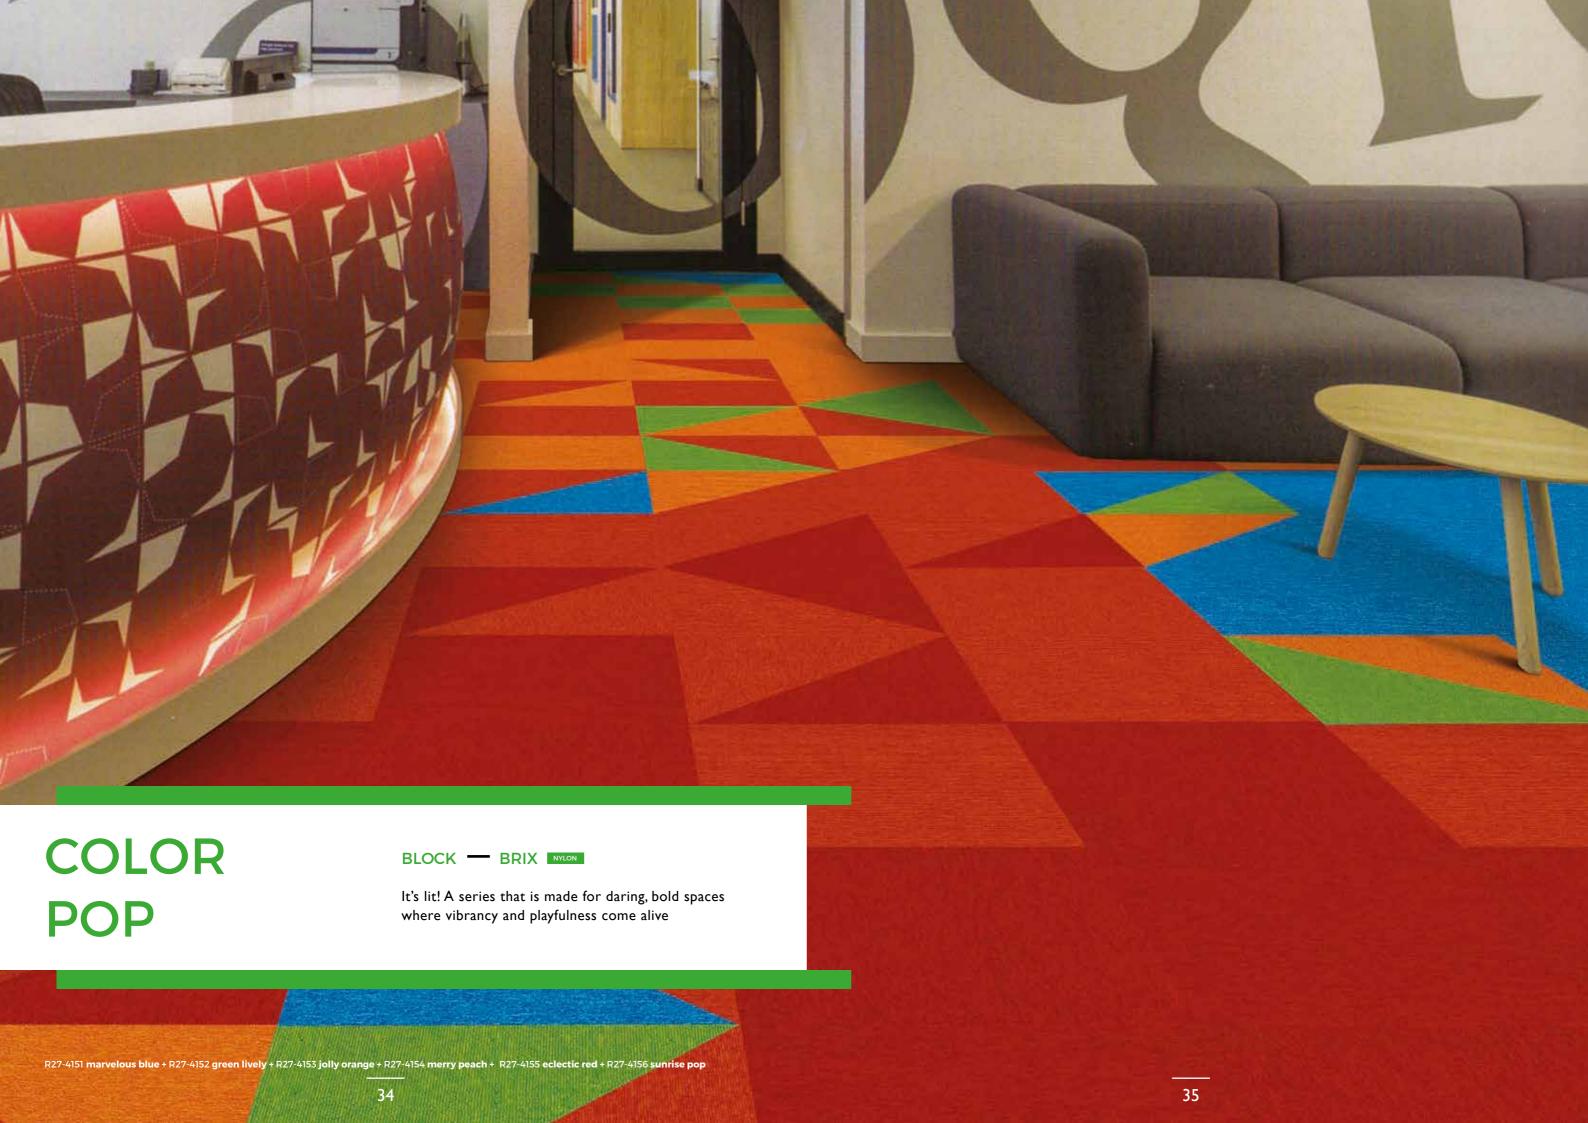

BLOCK



SPECIFICATIONS

Fibre 100% BCI
Construction 1/10" Leve

100% BCF Solution Dyed Synthethic 1/10" Level Loop Pile


Total Weight Pile Height

Total Height

ca. 2440g/m² (72oz/y²) ca. 3mm (± 0.5mm) ca. 5mm (± 0.5mm)

Backing No. of Tiles/Box Standard Size FibraTuff Back™ 20 pcs (5m²) 50cm x 50cm Recommended Usage Installation Method Warranties Medium Commercial
Quarter-turn
10-year Limited Wear Warranty
Lifetime Antishock Carpet Warranty



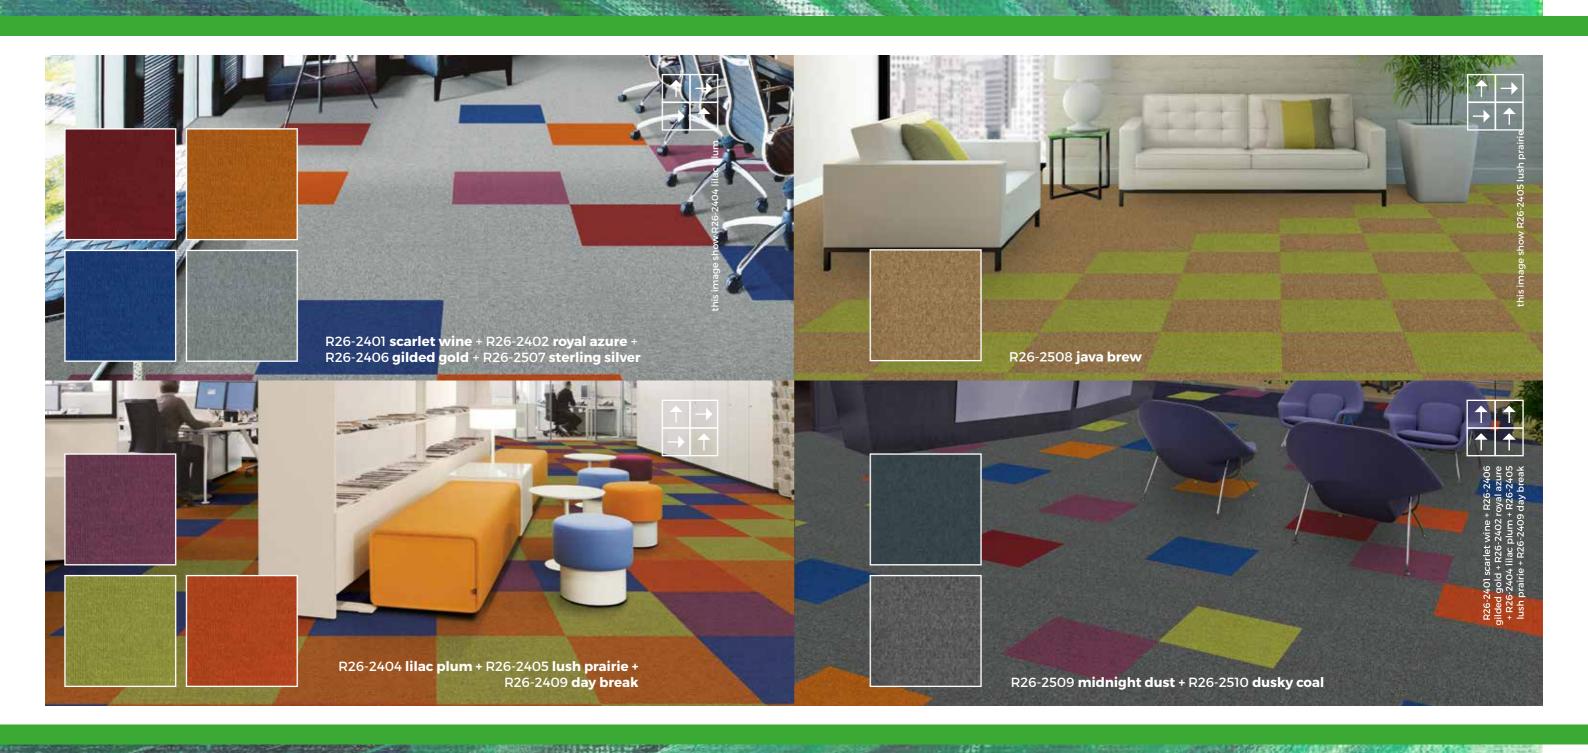

SPECIFICATIONS

Fibre 100% Invista® Nylon
Construction 1/10" Level Loop Pile


Total Weight ca. 3500g/m² (103oz/y²)

Pile Height ca. 3mm


Total Height ca. 5mm

BackingFibraTuff Back™No. of Tiles/Box20 pcs (5m²)Standard Size50cm x 50cm

Recommended Usage Installation Method Warranties Heavy Commercial
Quarter-turn
15-year Limited Wear Warranty
Lifetime Antishock Carpet Warranty

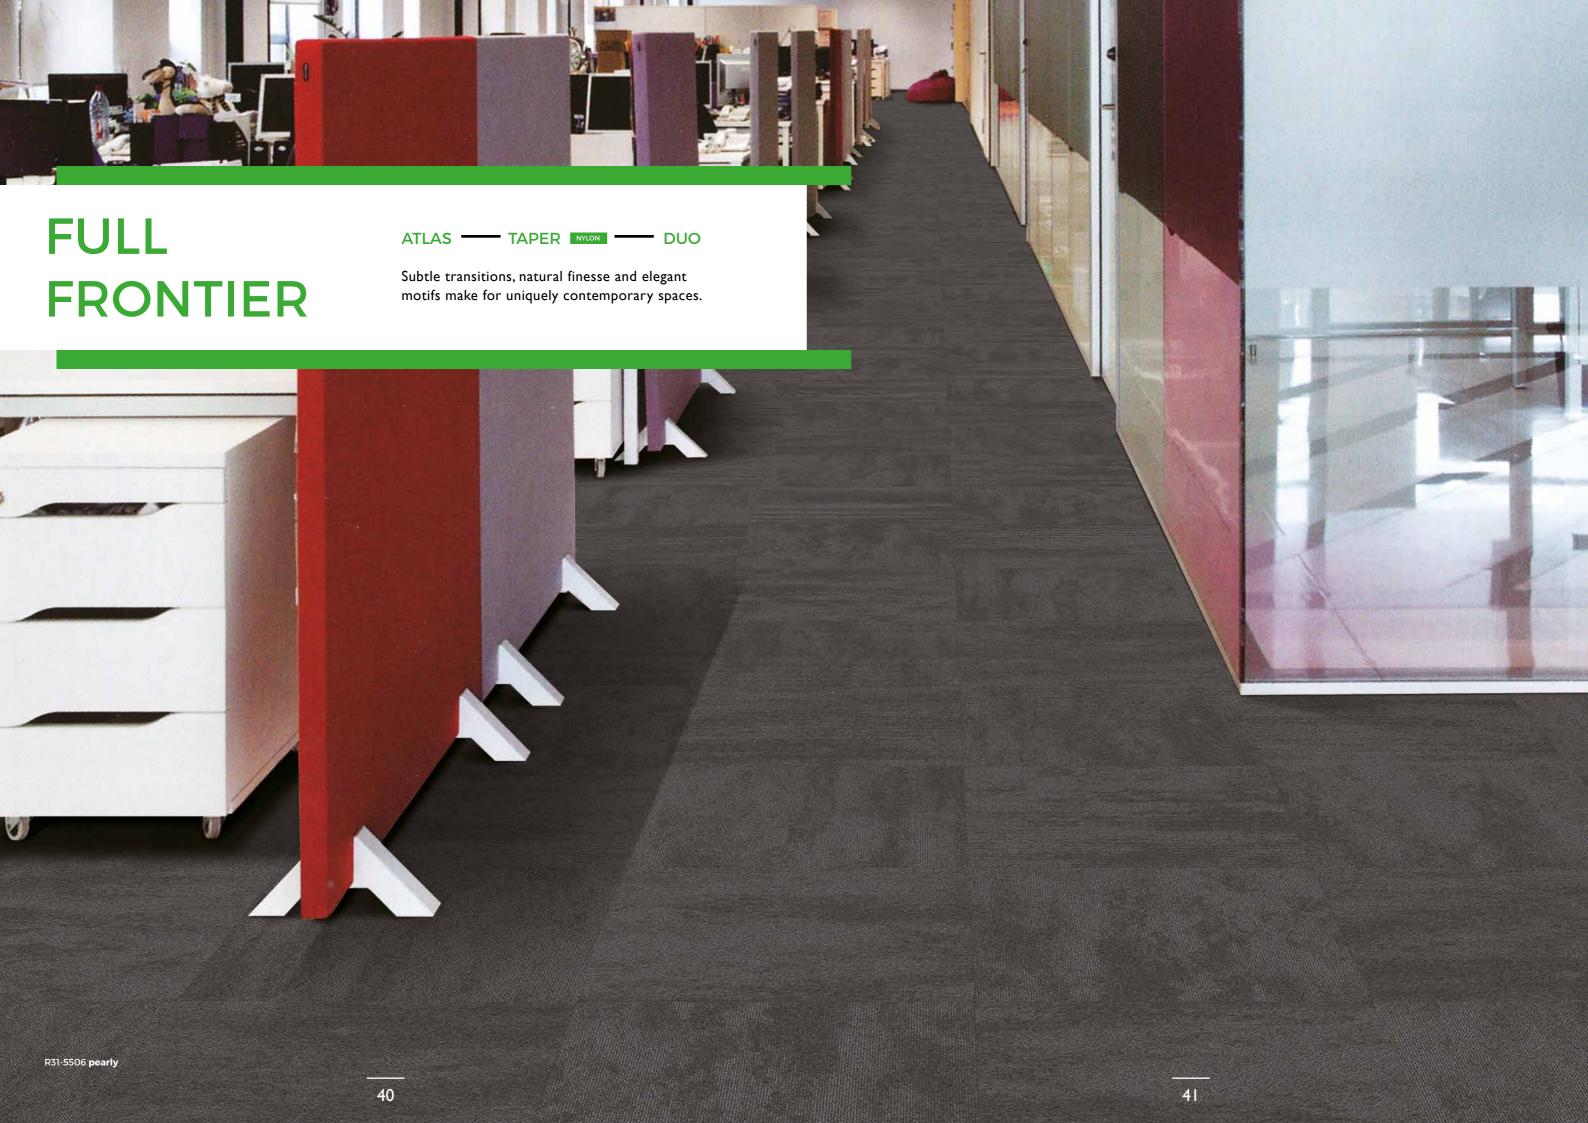

ATLAS

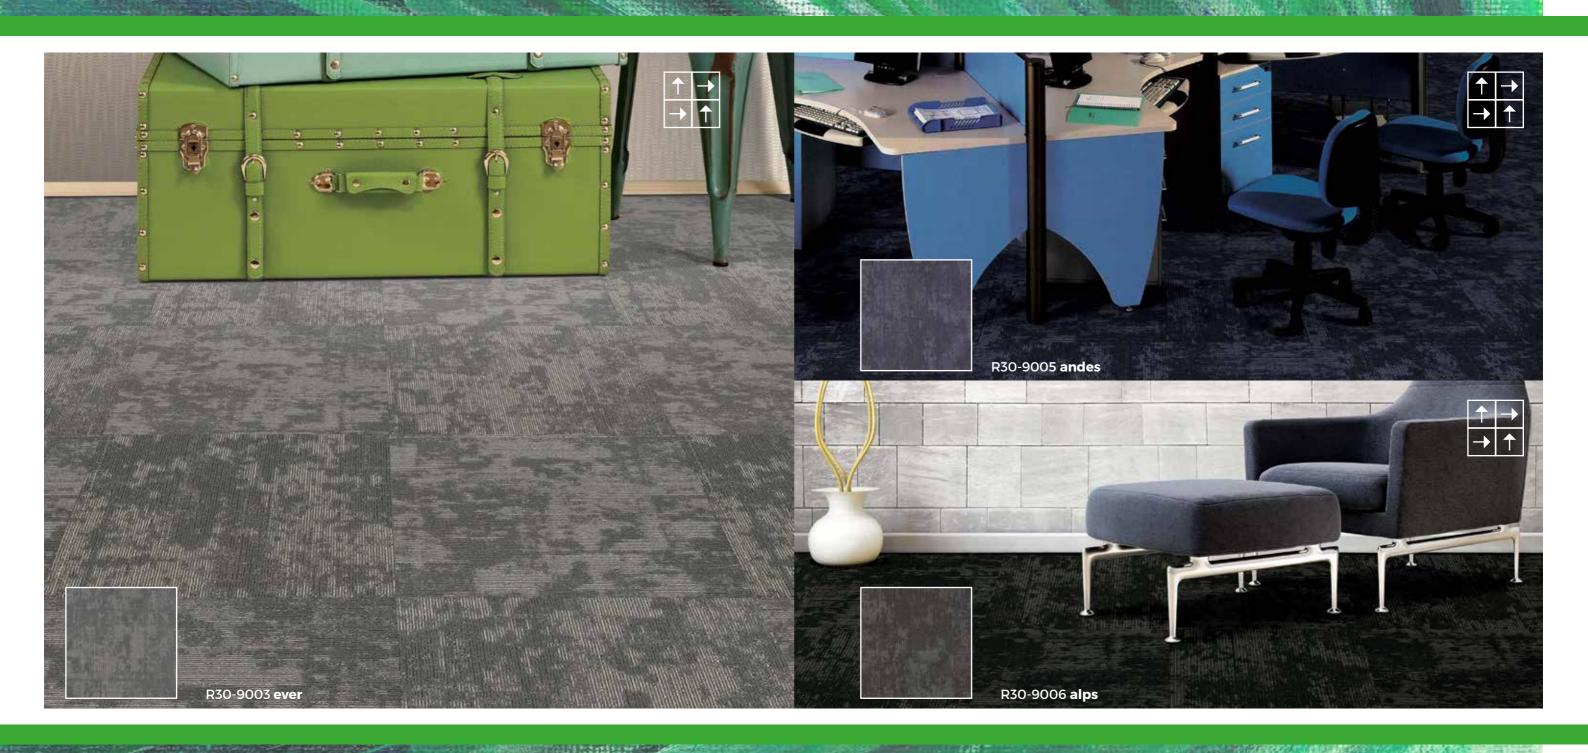

SPECIFICATIONS

Fibre 100% Solution Dyed Olefin

Construction 1/12" Multi-Level Loop Graphic

 Pile Weight
 ca. 815g/m² (24oz/y²)


 Total Weight
 ca. 3670g/m² (108oz/y²)

 Pile Height
 ca. 4mm (± 0.5mm)

Total Heightca. 6.5mm (± 0.5mm)BackingFibraTuff Back™No. of Tiles/Box20 pcs (5m²)Standard Size50cm x 50cm

Recommended Usage Medium Commercial
Installation Method Quarter-turn
Warranties 10-year Limited Wear Warranty
Lifetime Antishock Carpet Warranty



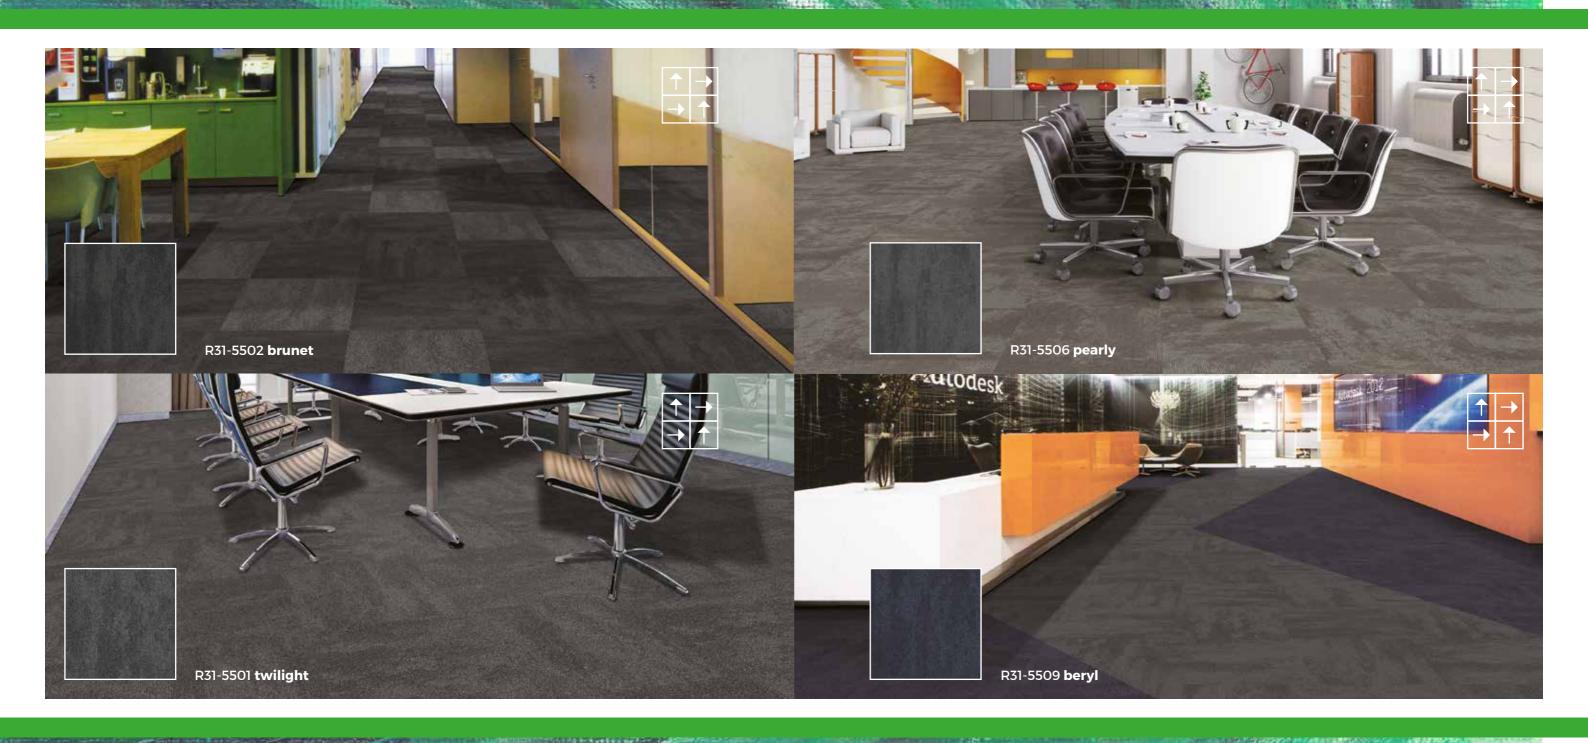

SPECIFICATIONS

Fibre 100% Solution Dyed Nylon

Construction 1/10" Multi-Level Loop Pattern

 Pile Weight
 ca. 815g/m² (24oz/y²)

 Total Weight
 ca. 3670g/m² (200oz/y²)

 Pile Height
 ca. 4mm (± 0.5mm)

Total Heightca. 6mm (± 0.5mm)BackingFibraTuff Back™No. of Tiles/Box20 pcs (5m²)Standard Size50cm x 50cm

Recommended Usage Heavy Commercial Installation Method Quarter-turn Warranties 15-year Limited West

15-year Limited Wear Warranty Lifetime Antishock Carpet Warranty

DUO



SPECIFICATIONS

Fibre Construction 100% BCF Solution Dyed Synthethic 1/10" Level Loop Pile

Pile Weight Total Weight ca. 750g/m² (22oz/y²) ca. 3600g/m² (106oz/y²)


Pile Height ca. 3mm

Total Height
Backing
No. of Tiles/Box

Standard Size

ca. 5mm FibraTuff Back™ 20 pcs (5m²) 25cm x 100cm Recommended Usage Installation Method Warranties Medium Commercial
Ashlar or Herringbone
10-year Limited Wear Warranty
Lifetime Antishock Carpet Warranty

DUO

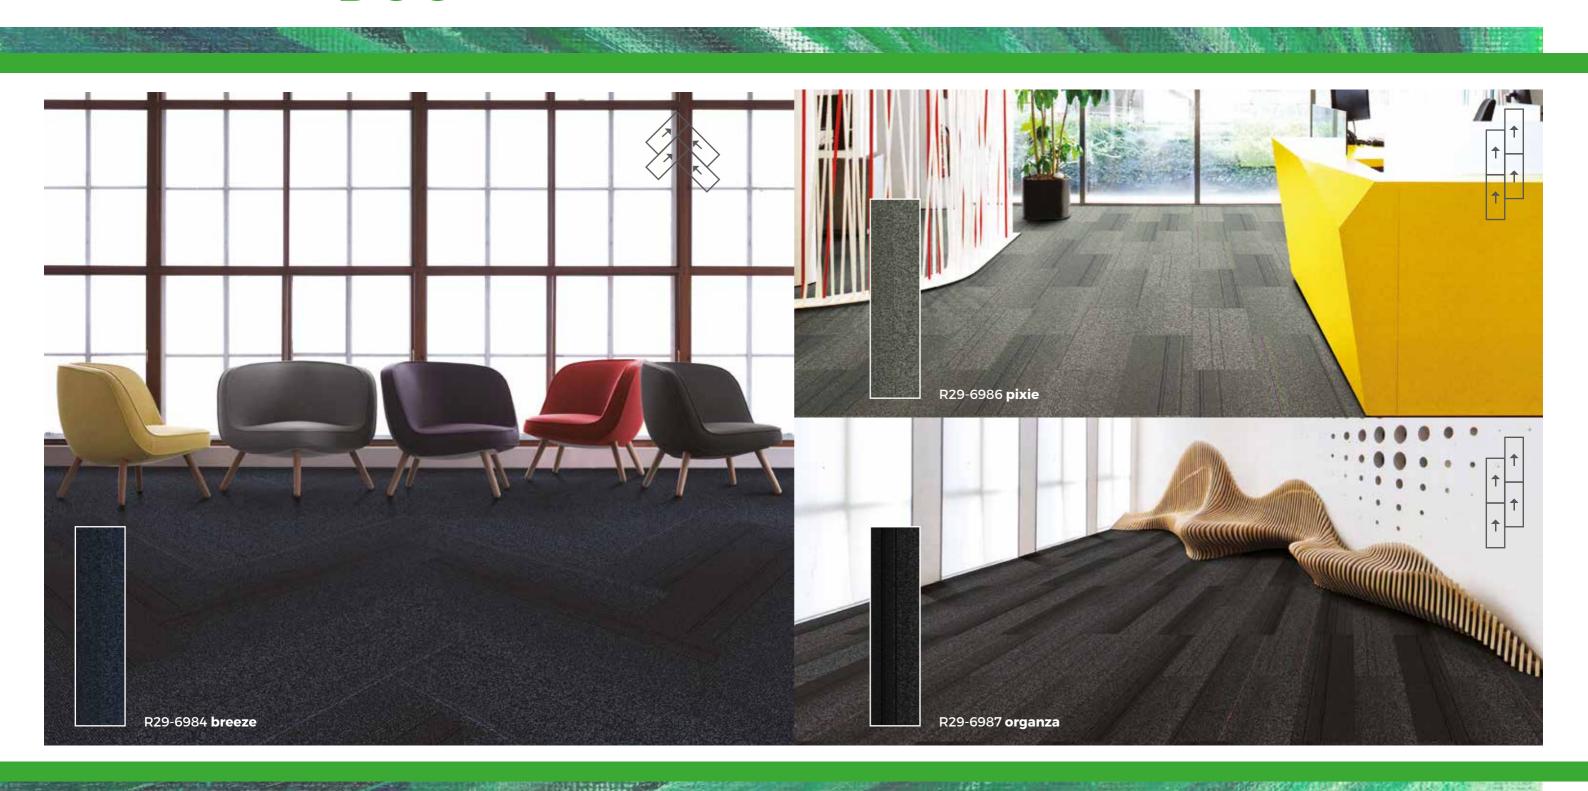

SPECIFICATIONS

Fibre Construction 100% BCF Solution Dyed Synthethic 1/10" Level Loop Pile

Pile Weight Total Weight


Pile Height

ca. 750g/m² (22oz/y²) ca. 3600g/m² (106oz/y²)


ca. 3mm

Total Height
Backing
No. of Tiles/Box
Standard Size

ca. 5mm FibraTuff Back™ 20 pcs (5m²) 25cm x 100cm Recommended Usage Installation Method Warranties Medium Commercial
Ashlar or Herringbone
10-year Limited Wear Warranty
Lifetime Antishock Carpet Warranty

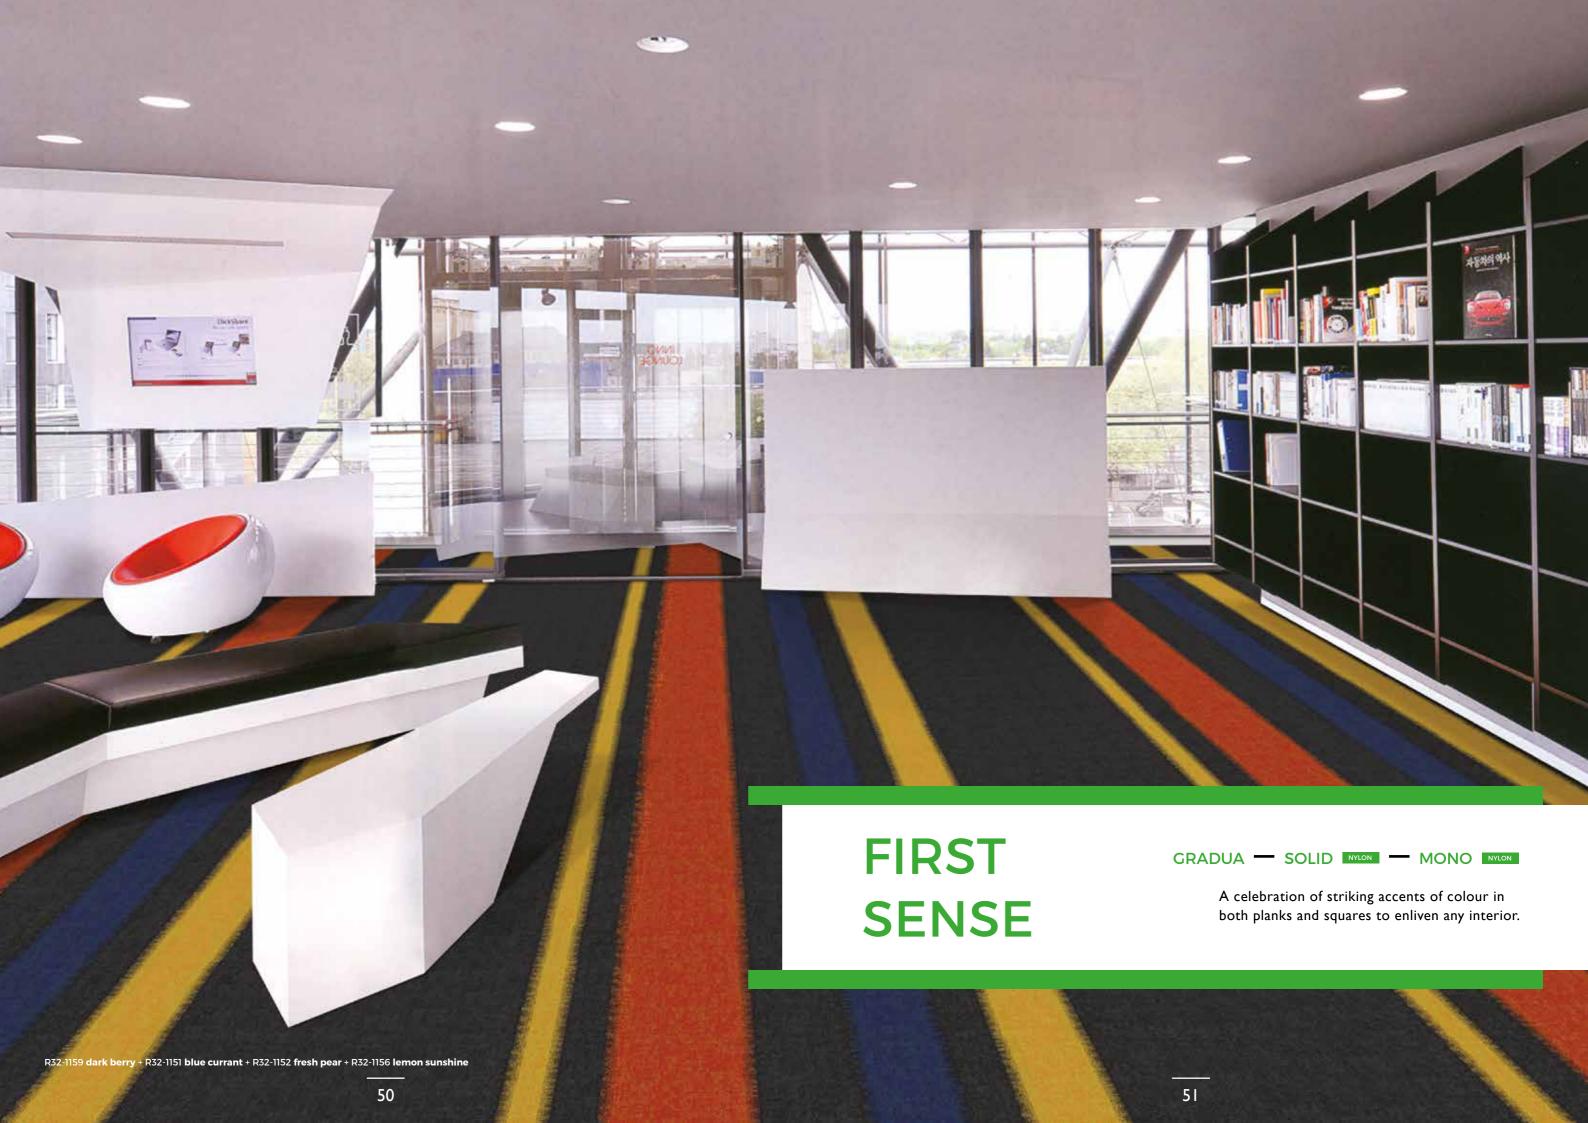

GRADUA —

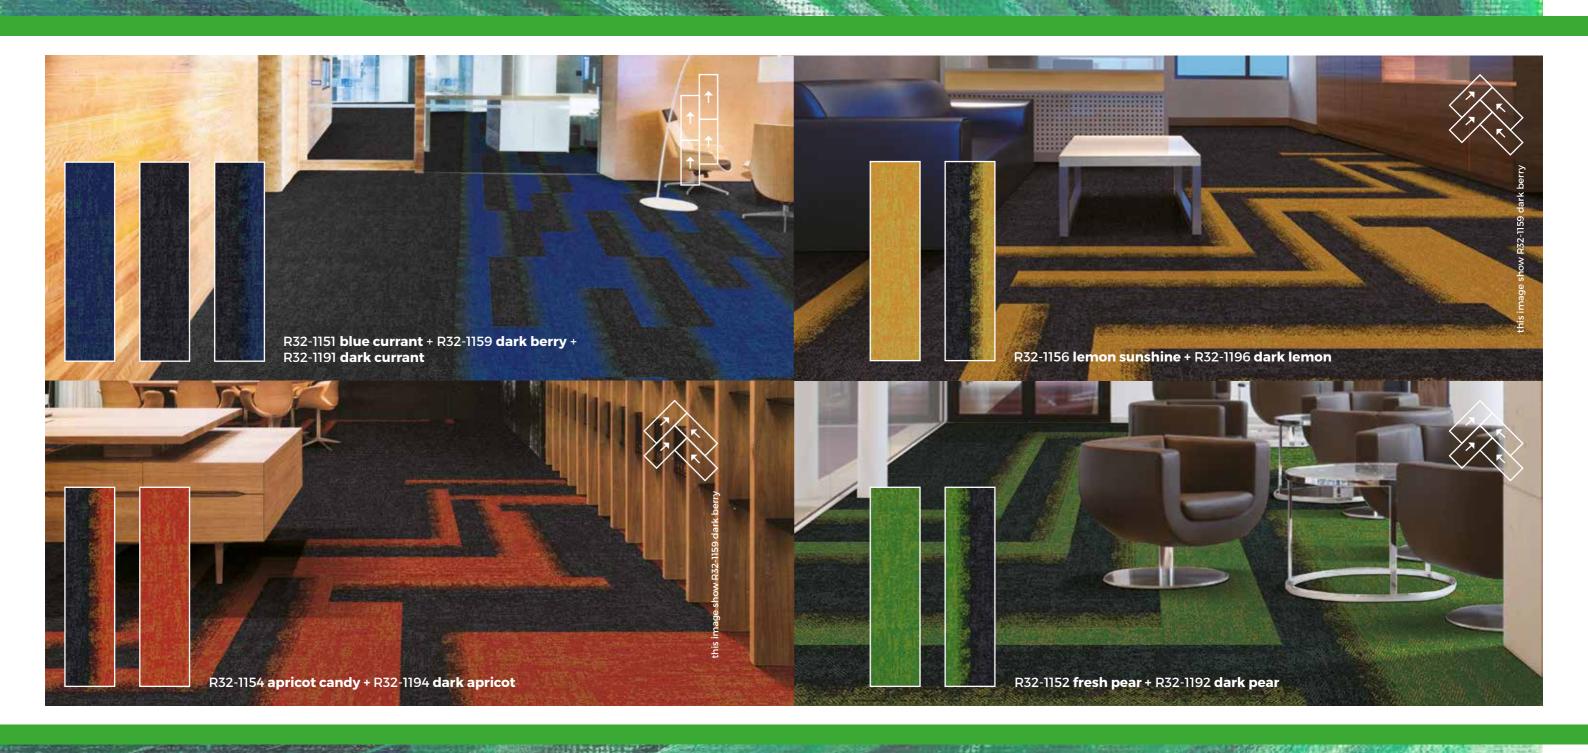

SPECIFICATIONS

Fibre Construction 100% Solution Dyed Olefin
1/12" Loop Pile Graphics

Pile Weight Total Weight

Pile Height

ca. 815g/m² (24oz/y²) ca. 3400g/m² (100oz/y²)

ca. 4mm (± 0.5mm)

Total Height
Backing
No. of Tiles/Box
Standard Size

ca. 6mm (± 0.5mm) FibraTuff Back™ 20 pcs (5m²) 25cm x 100cm Recommended Usage Installation Method Warranties Medium Commercial
Ashlar or Herringbone
10-year Limited Wear Warranty
Lifetime Antishock Carpet Warranty





SPECIFICATIONS

Fibre Construction 100% Solution Dyed Nylon 1/12" Multi-Level Loop

Pile Weight Total Weight


Pile Height

ca. 815g/m² (24oz/y²) ca. 3670g/m² (200oz/y²) ca. 4mm (± 0.5mm)

Total Height
Backing
No. of Tiles/Box
Standard Size

ca. 7mm (± 0.5mm) FibraCush Back™ 20 pcs (5m²) 50cm x 50cm Recommended Usage Installation Method Warranties Heavy Commercial
Quarter-turn
15-year Limited Wear Warranty
Lifetime Antishock Carpet Warranty

MONO NYLON

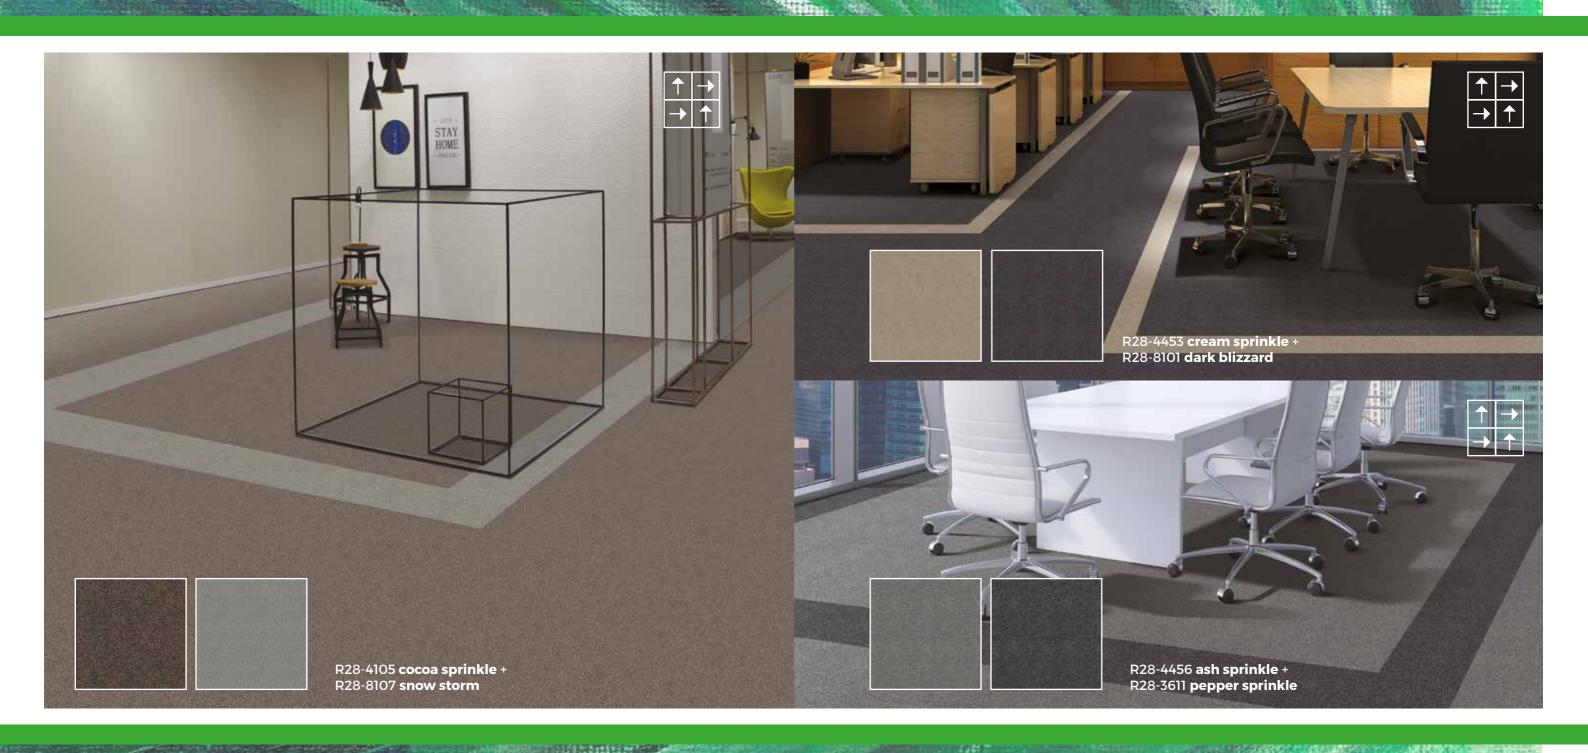

SPECIFICATIONS

Fibre 100% Solution Dyed Nylon

Construction 1/10" Cut Pile Frieze

Total Weight ca. 3600g/m² (106oz/y²)

Pile Height ca. 5.5mm (± 0.5mm)


Total Height ca. 11mm (± 0.5mm)

56

BackingFibraCush Back™No. of Tiles/Box16 pcs (4m²)Standard Size50cm x 50cm

Recommended Usage Heavy Commercial
Installation Method Quarter-turn
Warranties 10-year Limited Wear Warranty
Lifetime Antishock Carpet Warranty

MONO NYLON

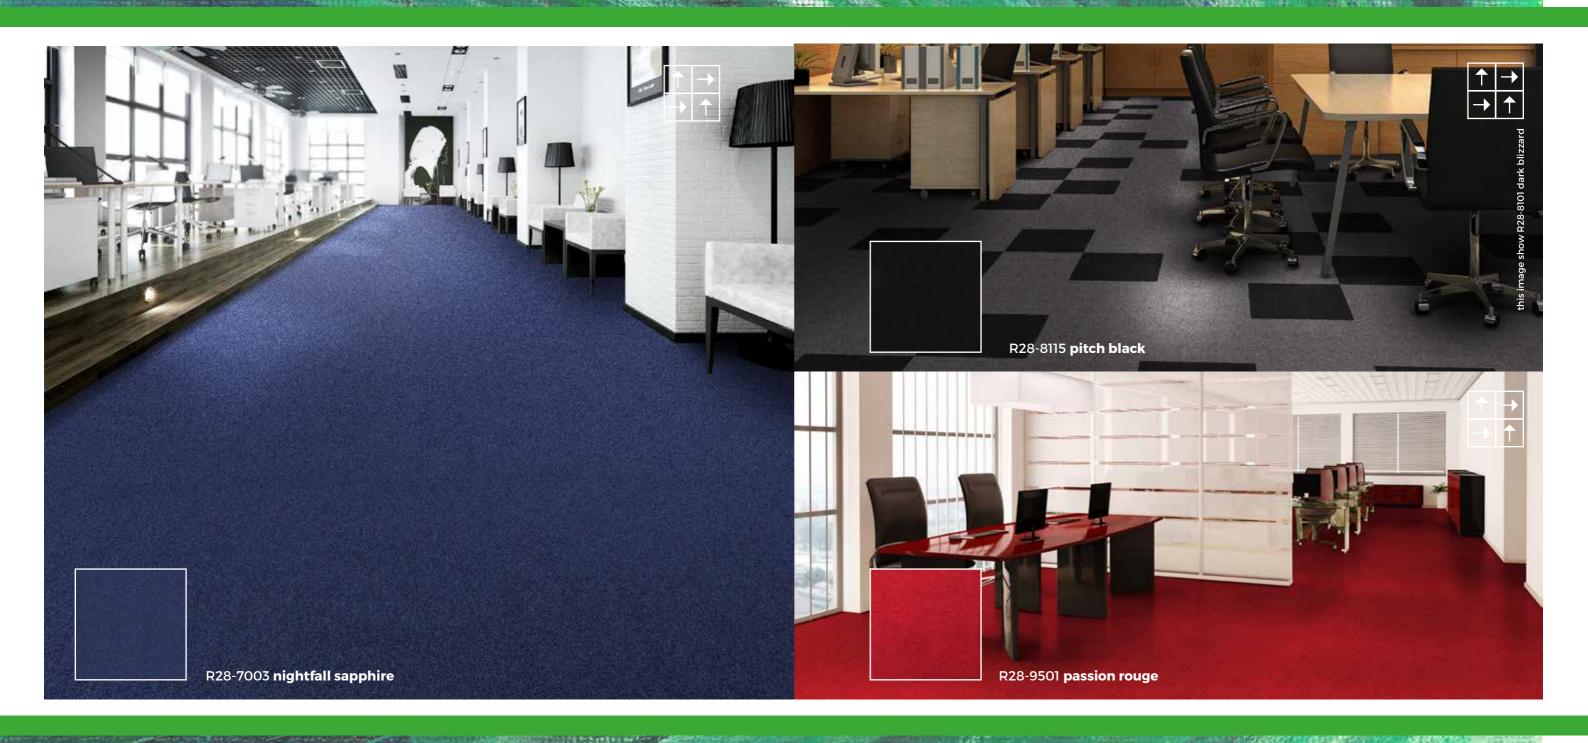

SPECIFICATIONS


Fibre 100% Solution Dyed Nylon

Construction 1/10" Cut Pile Frieze


Total Weightca. 3600g/m² (106oz/y²)Pile Heightca. 5.5mm (± 0.5mm)Total Heightca. 11mm (± 0.5mm)

BackingFibraCush Back™No. of Tiles/Box16 pcs (4m²)Standard Size50cm x 50cm

Recommended Usage Heavy Commercial
Installation Method Quarter-turn
Warranties 10-year Limited Wear Warranty
Lifetime Antishock Carpet Warranty

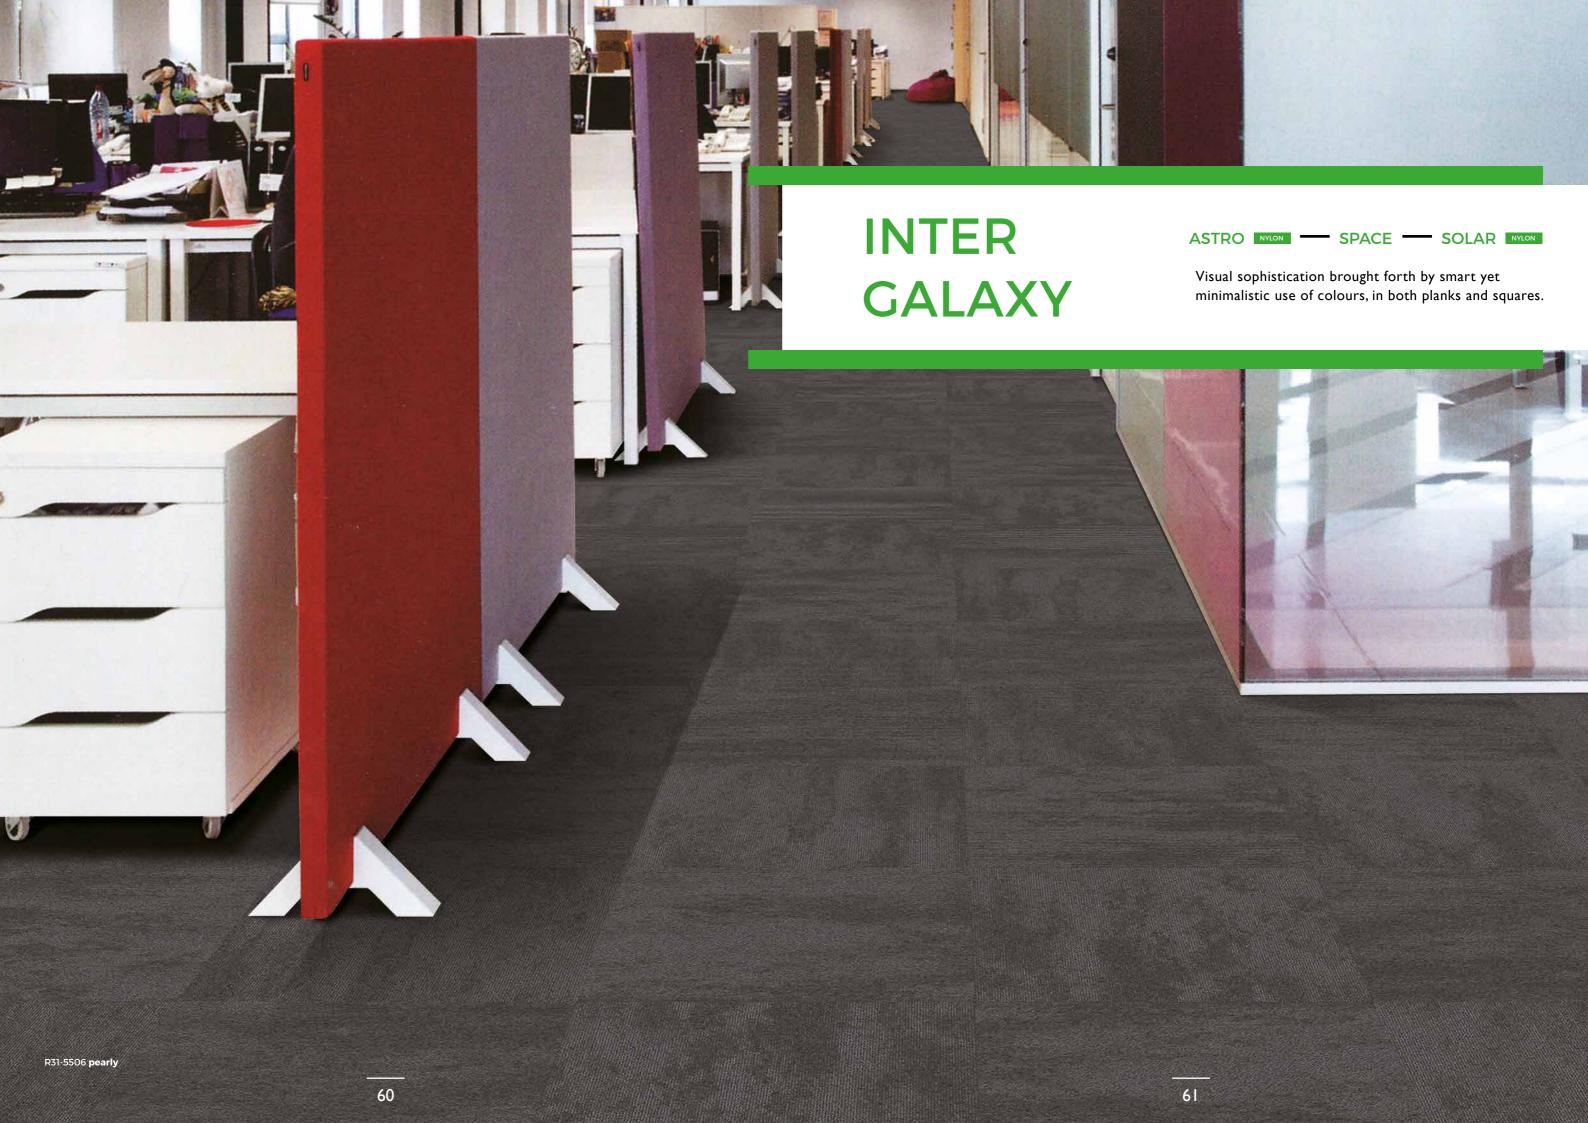

ASTRO NYLON

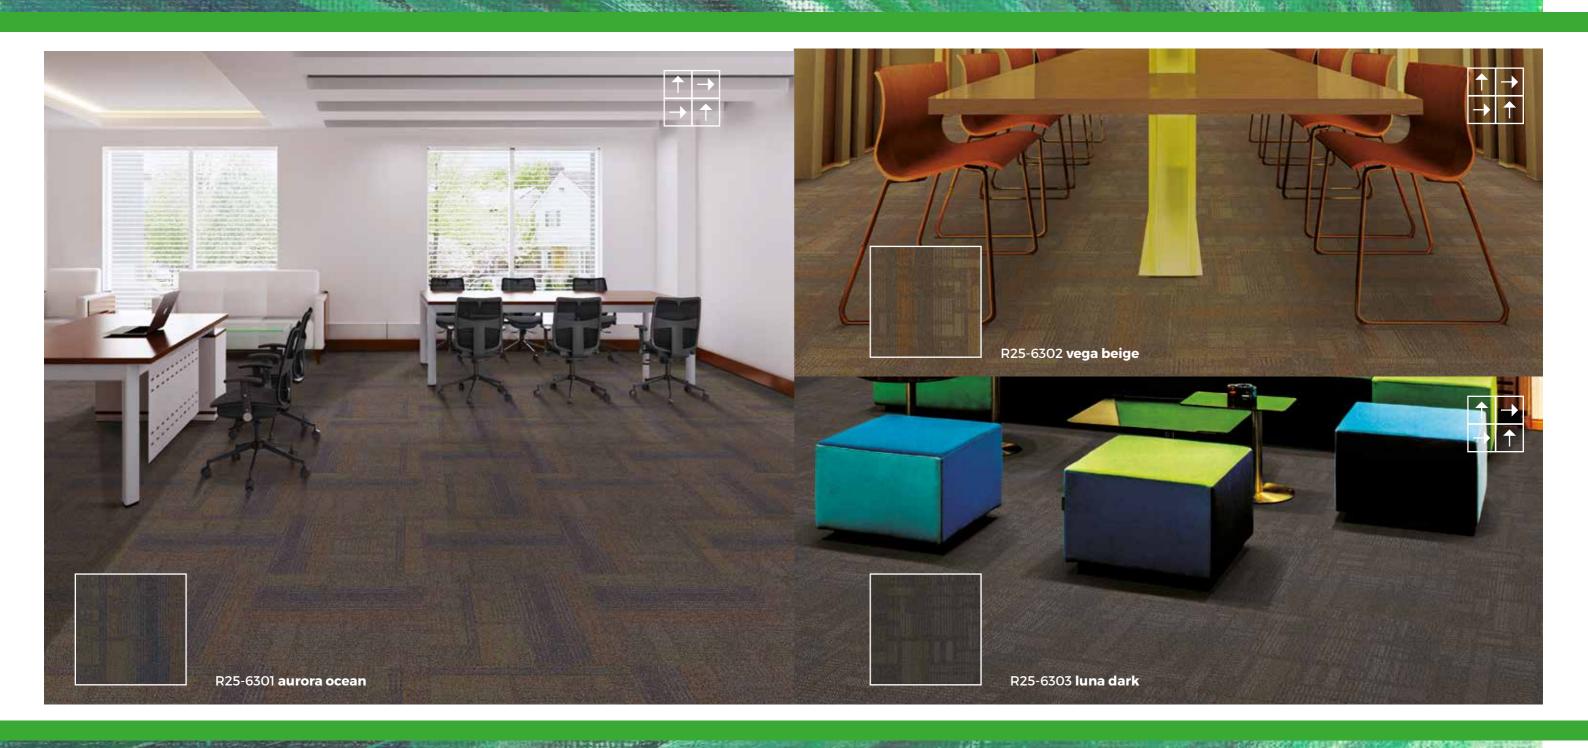

SPECIFICATIONS

Fibre Construction 100% Invista® Nylon 1/12" Multi-Level Loop

Pile Weight Total Weight

Pile Height

ca. 815g/m² (24oz/y²) ca. 3670g/m² (200oz/y²) ca. 4mm (± 0.5mm) Total Height
Backing
No. of Tiles/Box
Standard Size

ca. 6mm (± 0.5mm) FibraTuff Back™ 20 pcs (5m²) 50cm x 50cm Recommended Usage Installation Method Warranties Heavy Commercial
Quarter-turn
15-year Limited Wear Warranty
Lifetime Antishock Carpet Warranty

SPACE—



SPECIFICATIONS

Fibre Construction 100% Solution Dyed Olefin 1/12" Multi-Level Loop Graphic Pile Weight Total Weight

Pile Height

ca. 815g/m² (24oz/y²) ca. 4400g/m² (130oz/y²) ca. 3mm / 4mm / 5mm

Total Height
Backing
No. of Tiles/Box
Standard Size

ca. 7mm FibraTuff Back™ 10 pcs (5m²) 50cm x 100cm Recommended Usage Installation Method Warranties Medium Commercial
Brick, Ashlar or Herringbone
10-year Limited Wear Warranty
Lifetime Antishock Carpet Warranty

SOLAR NYLON



SPECIFICATIONS

Fibre Construction 100% Solution Dyed Nylon 1/12" Multi-Level Loop Pattern

Pile Weight Total Weight

Pile Height


ca. 815g/m² (24oz/y²) ca. 3670g/m² (200oz/y²) ca. 4mm (± 0.5mm)

Total Height
Backing
No. of Tiles/Box
Standard Size

ca. 6mm (± 0.5mm) FibraTuff Back™ 20 pcs (5m²) 25cm x 100cm Recommended Usage Installation Method Warranties Heavy Commercial
Ashlar or Herringbone
15-year Limited Wear Warranty
Lifetime Antishock Carpet Warranty



EVOLUTION NYLON

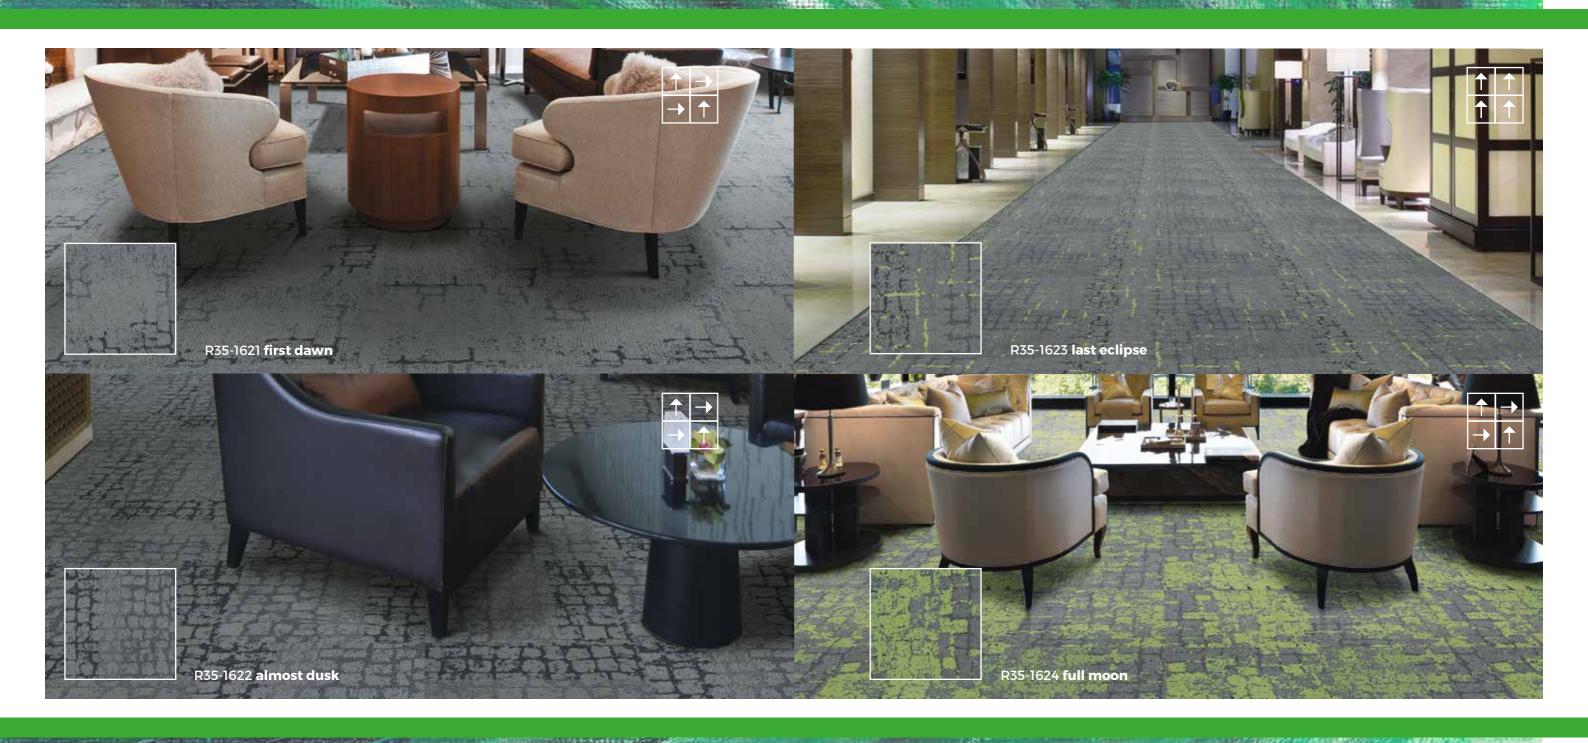

SPECIFICATIONS

Fibre 1
Construction 1

100% Solution Dyed Nylon
1/10" Multi-Level Loop Pattern

Pile Weight Pile Height ca. 950g/m² (28oz/y²) ca. 3mm - 6mm (± 0.5mm) Backing No. of Tiles/Box Standard Size FibraCush Back™ 14 pcs (3.5m²) 50cm x 50cm Recommended Usage Installation Method Warranties Heavy Commercial
Ashlar, Brick or Quarter-turn
15-year Limited Wear Warranty Lifetime
Antishock Carpet Warranty

HONEYCOMB



SPECIFICATIONS

Fibre 100% Solution Dyed Nylon

Construction 1/12" Multi-Level Loop

Pile Weight Total Weight Pile Height ca. 815g/m² (24oz/y²) ca. 3670g/m² (200oz/y²) ca. 4mm (± 0.5mm) Total Height
Backing
No. of Tiles/Box
Standard Size

ca. 7mm (± 0.5mm) FibraCush Back™ 20 pcs (3.24m²) 50cm x 43.3cm Recommended Usage Installation Method Warranties Heavy Commercial
Quarter-turn
15-year Limited Wear Warranty
Lifetime Antishock Carpet Warranty

TIMBER



SPECIFICATIONS

Fibre Construction 100% Solution Dyed Nylon 1/12" Multi-Level Loop

Pile Weight Total Weight

Pile Height

ca. 815g/m² (24oz/y²) ca. 3670g/m² (200oz/y²) ca. 4mm (± 0.5mm)

Total Height
Backing
No. of Tiles/Box
Standard Size


ca. 6mm (± 0.5mm)

FibraTuff Back™

20 pcs (5m²)

25cm x 100cm

Recommended Usage Installation Method Warranties Heavy Commercial
Ashlar or Herringbone
15-year Limited Wear Warranty
Lifetime Antishock Carpet Warranty

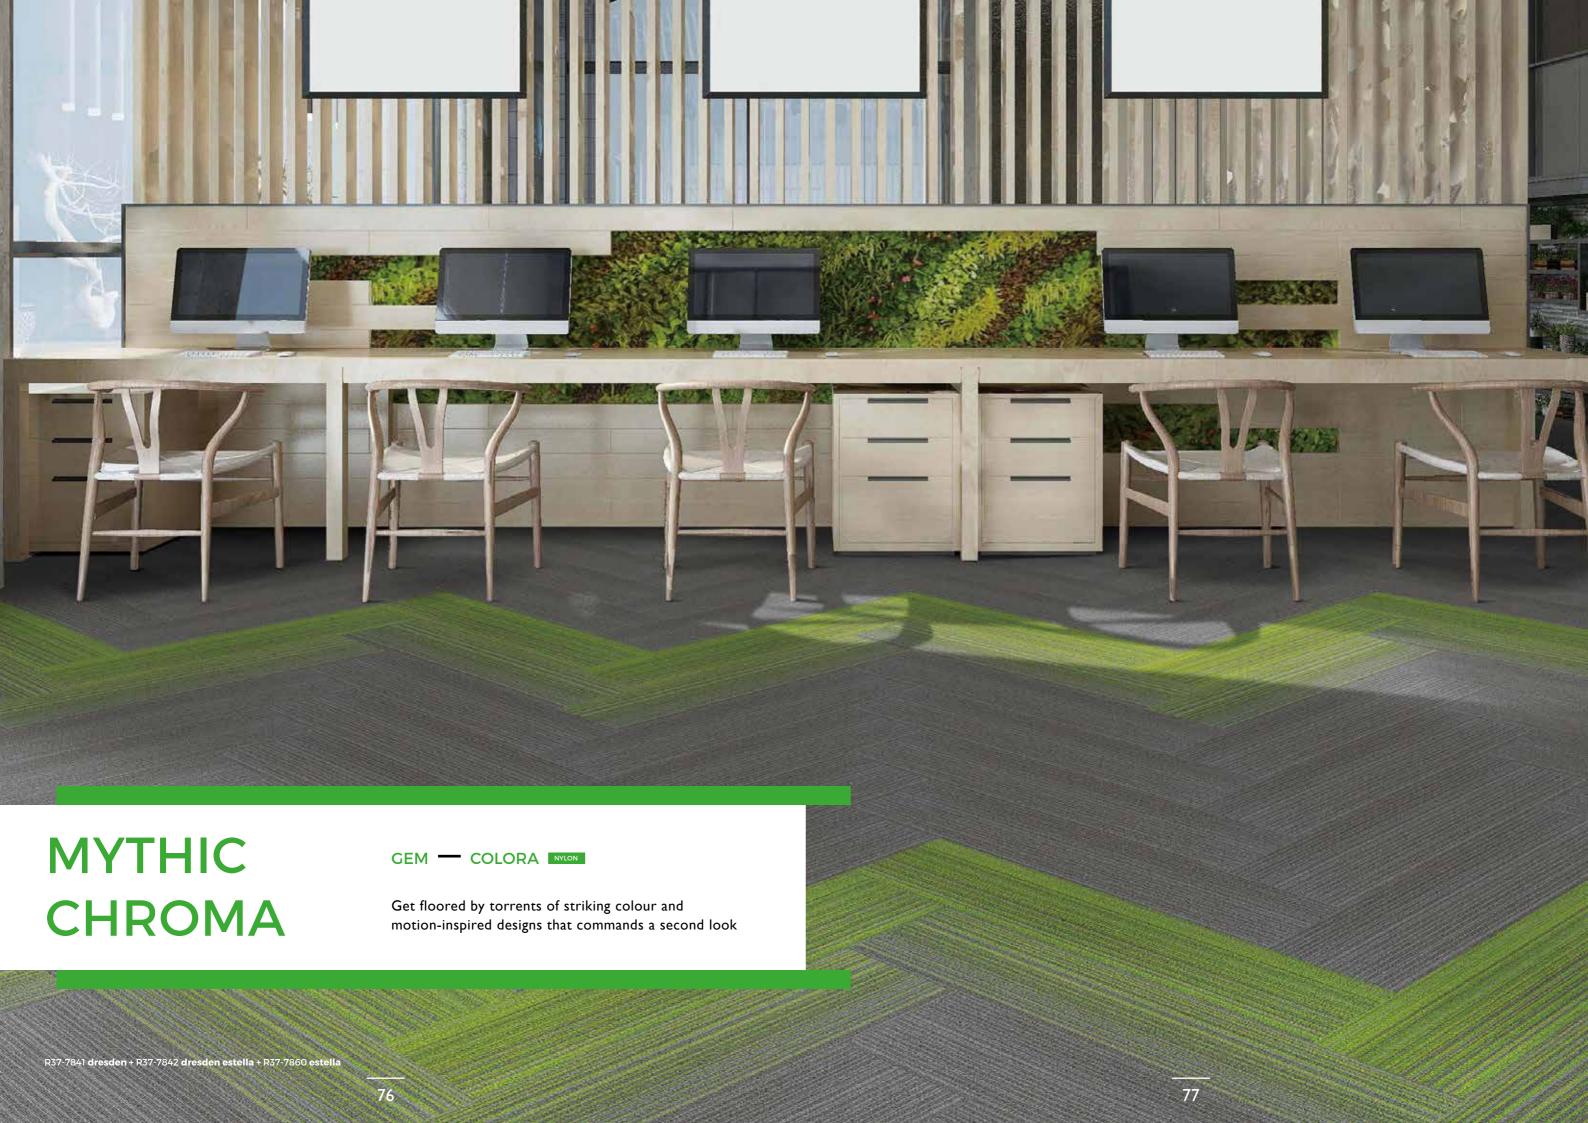

GEM



SPECIFICATIONS

Fibre Construction 100% Solution Dyed Olefin 1/10" Multi-Level Loop Pattern

Pile Weight Total Weight

Pile Height

ca. 678g/m2 (20oz/y²) ca. 3670g/m2 (108oz/y²) ca. 4mm (± 0.5mm)

Total Height
Backing
No. of Tiles/Box
Standard Size

ca. 6mm FibraTuff Back™ 20 pcs (5m²) 25cm x 100cm Recommended Usage Installation Method Warranties Medium Commercial
Ashlar or Herringbone
10-year Limited Wear Warranty
Lifetime Antishock Carpet Warranty

GEM



SPECIFICATIONS

Fibre Construction 100% Solution Dyed Olefin 1/10" Multi-Level Loop Pattern


Pile Weight Total Weight

Pile Height

ca. 678g/m2 (20oz/y²) ca. 3670g/m2 (108oz/y²) ca. 4mm (± 0.5mm)

Total Height
Backing
No. of Tiles/Box
Standard Size

ca. 6mm FibraTuff Back™ 20 pcs (5m²) 25cm x 100cm Recommended Usage Installation Method Warranties Medium Commercial
Ashlar or Herringbone
10-year Limited Wear Warranty
Lifetime Antishock Carpet Warranty

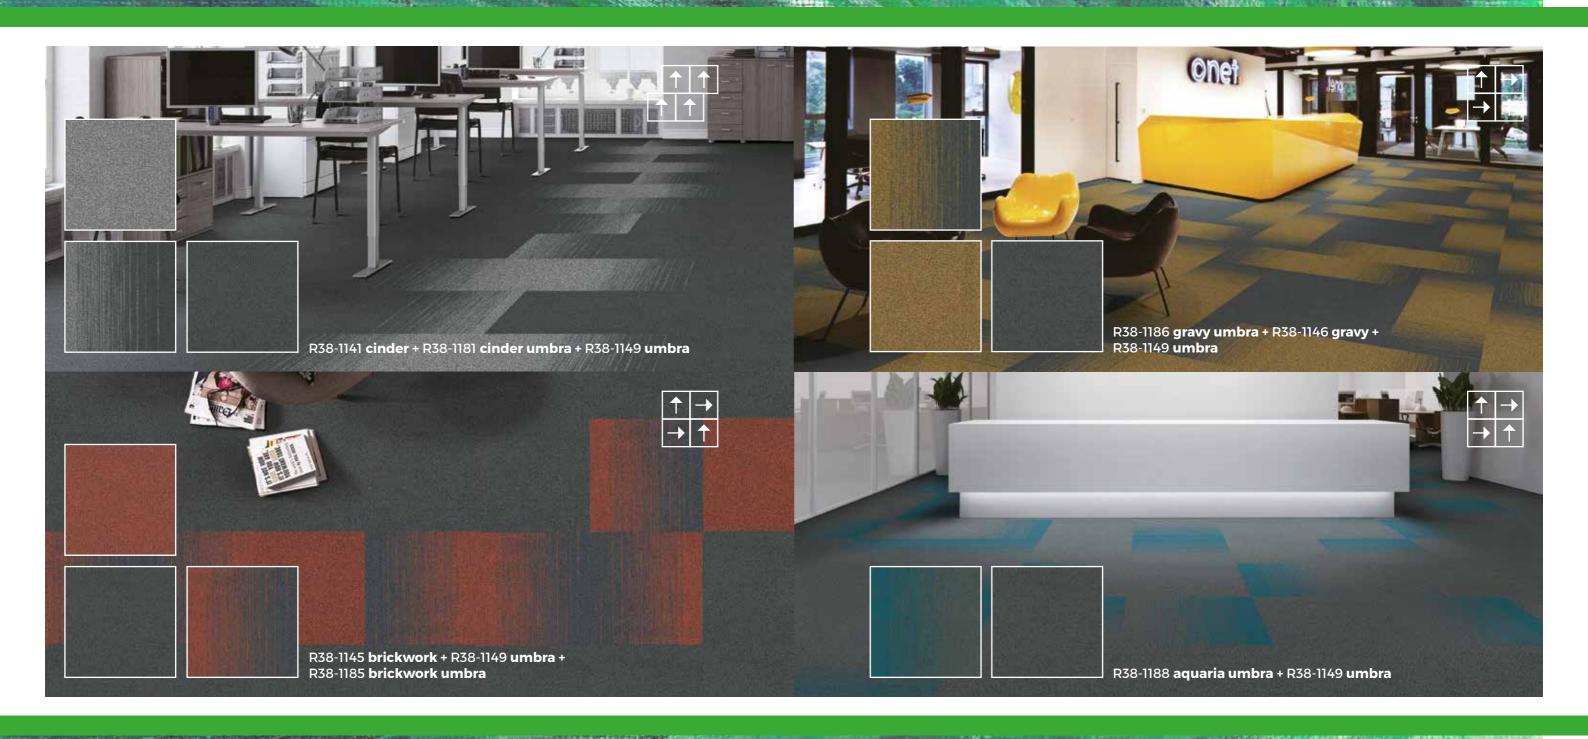

SPECIFICATIONS

Fibre Construction 100% Solution Dyed Nylon 1/12" Multi-Level Loop Pattern

Pile Weight Total Weight


Pile Height

ca. 678g/m2 (20oz/y²) ca. 3880g/m2 (114oz/y²) ca. 4mm (± 0.5mm)

Total Height
Backing
No. of Tiles/Box
Standard Size

ca. 7mm (± 0.5mm)
FibraTuff Back™
20 pcs (5m²)
50cm x 50cm

Recommended Usage Installation Method Warranties Heavy Commercial
Ashlar, Brick or Quarter-turn
15-year Limited Wear Warranty
Lifetime Antishock Carpet Warranty

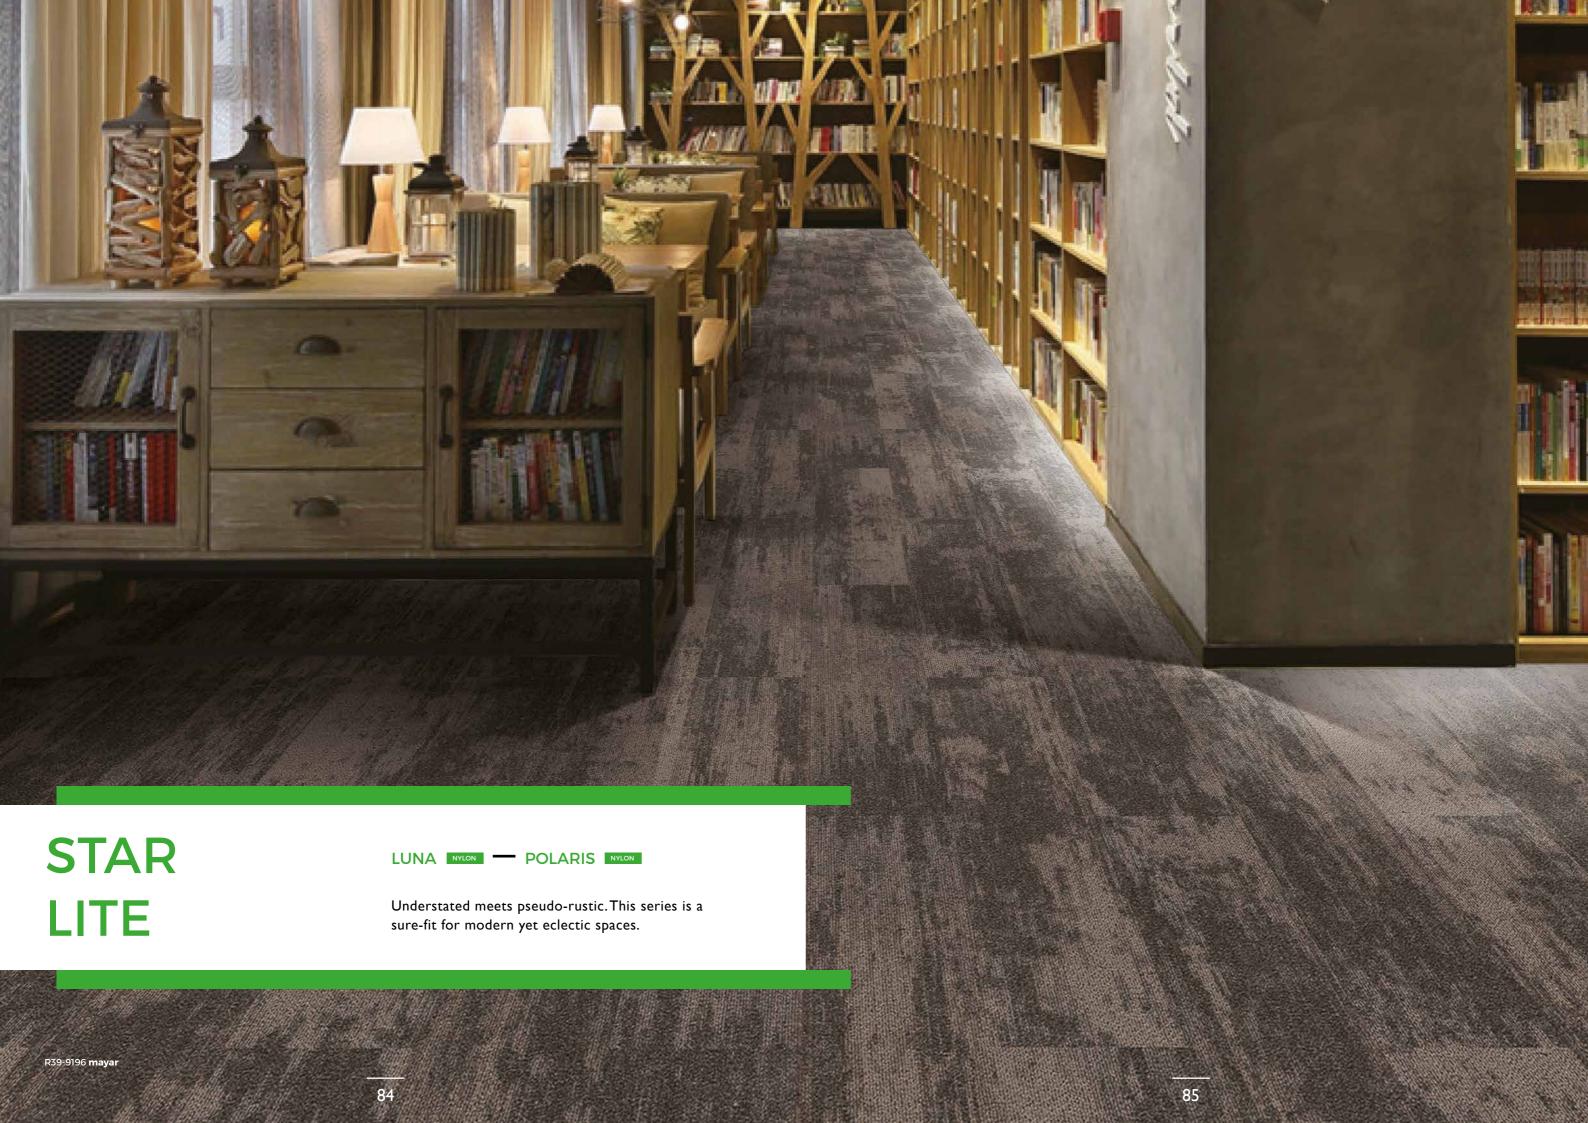





SPECIFICATIONS

Fibre Construction 100% Solution Dyed Nylon 1/10" Multi-Level Loop Pattern

Pile Weight Total Weight


Pile Height

ca. 542g/m2 (16oz/y²) ca. 2800g/m2 (82oz/y²) ca. 3mm (± 0.5mm)

Total Height
Backing
No. of Tiles/Box
Standard Size

ca. 5mm FibraTuff Back™ 20 pcs (5m²) 25cm x 100cm Recommended Usage Installation Method Warranties Heavy Commercial
Ashlar or Herringbone
15-year Limited Wear Warranty
Lifetime Antishock Carpet Warranty

POLARIS

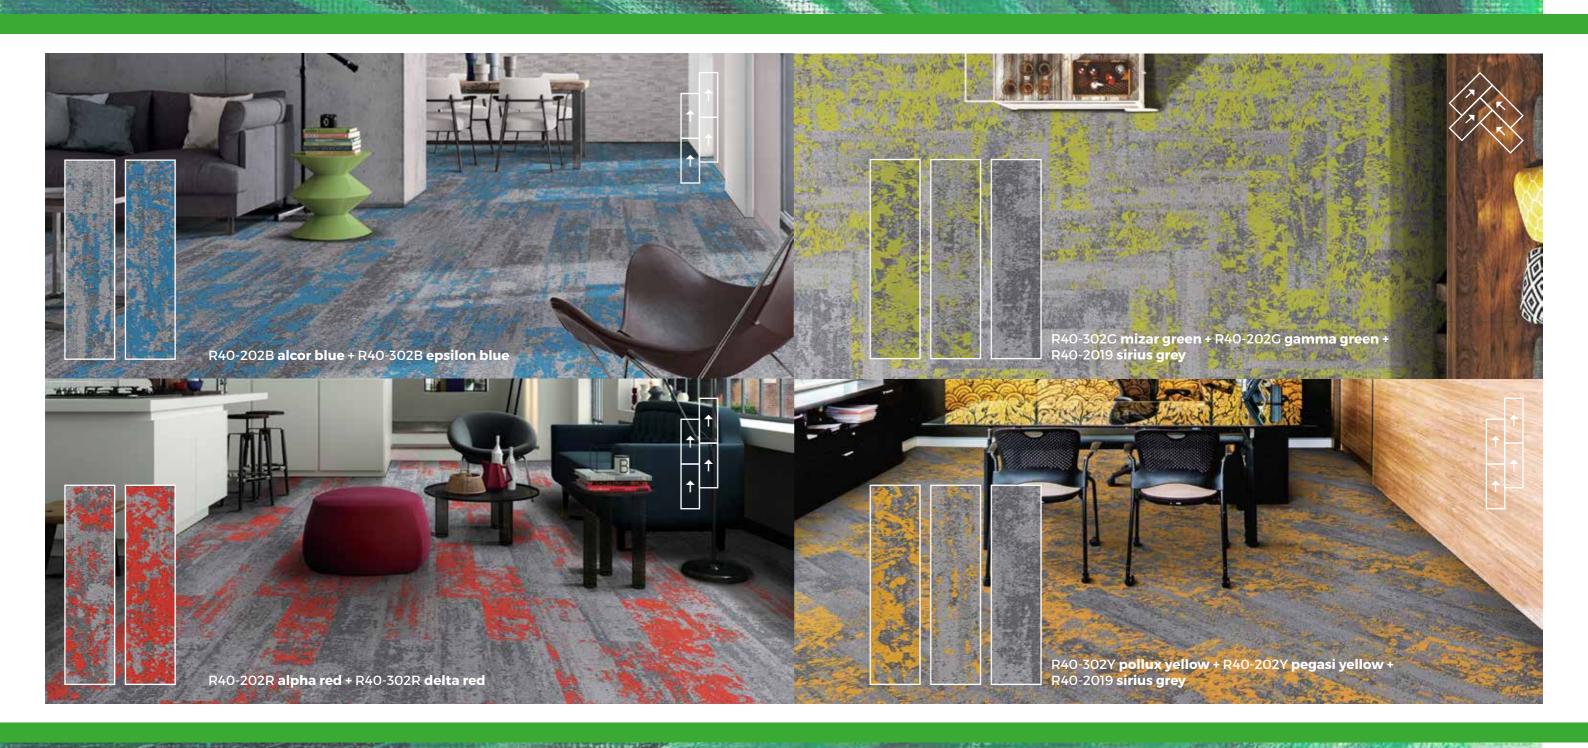

SPECIFICATIONS

Fibre Construction 100% Solution Dyed Nylon
1/12" Multi-Level Loop Pattern


Pile Weight Total Weight

Pile Height

ca. 813g/m2 (24oz/y²) ca. 4100g/m2 (120oz/y²) ca. 4mm (± 0.5mm)

Total Height
Backing
No. of Tiles/Box
Standard Size

ca. 9.5mm (± 0.5mm) FibraCush Back™ 20 pcs (5m²) 25cm x 100cm Recommended Usage Installation Method Warranties Heavy Commercial
Ashlar or Herringbone
15-year Limited Wear Warranty
Lifetime Antishock Carpet Warranty

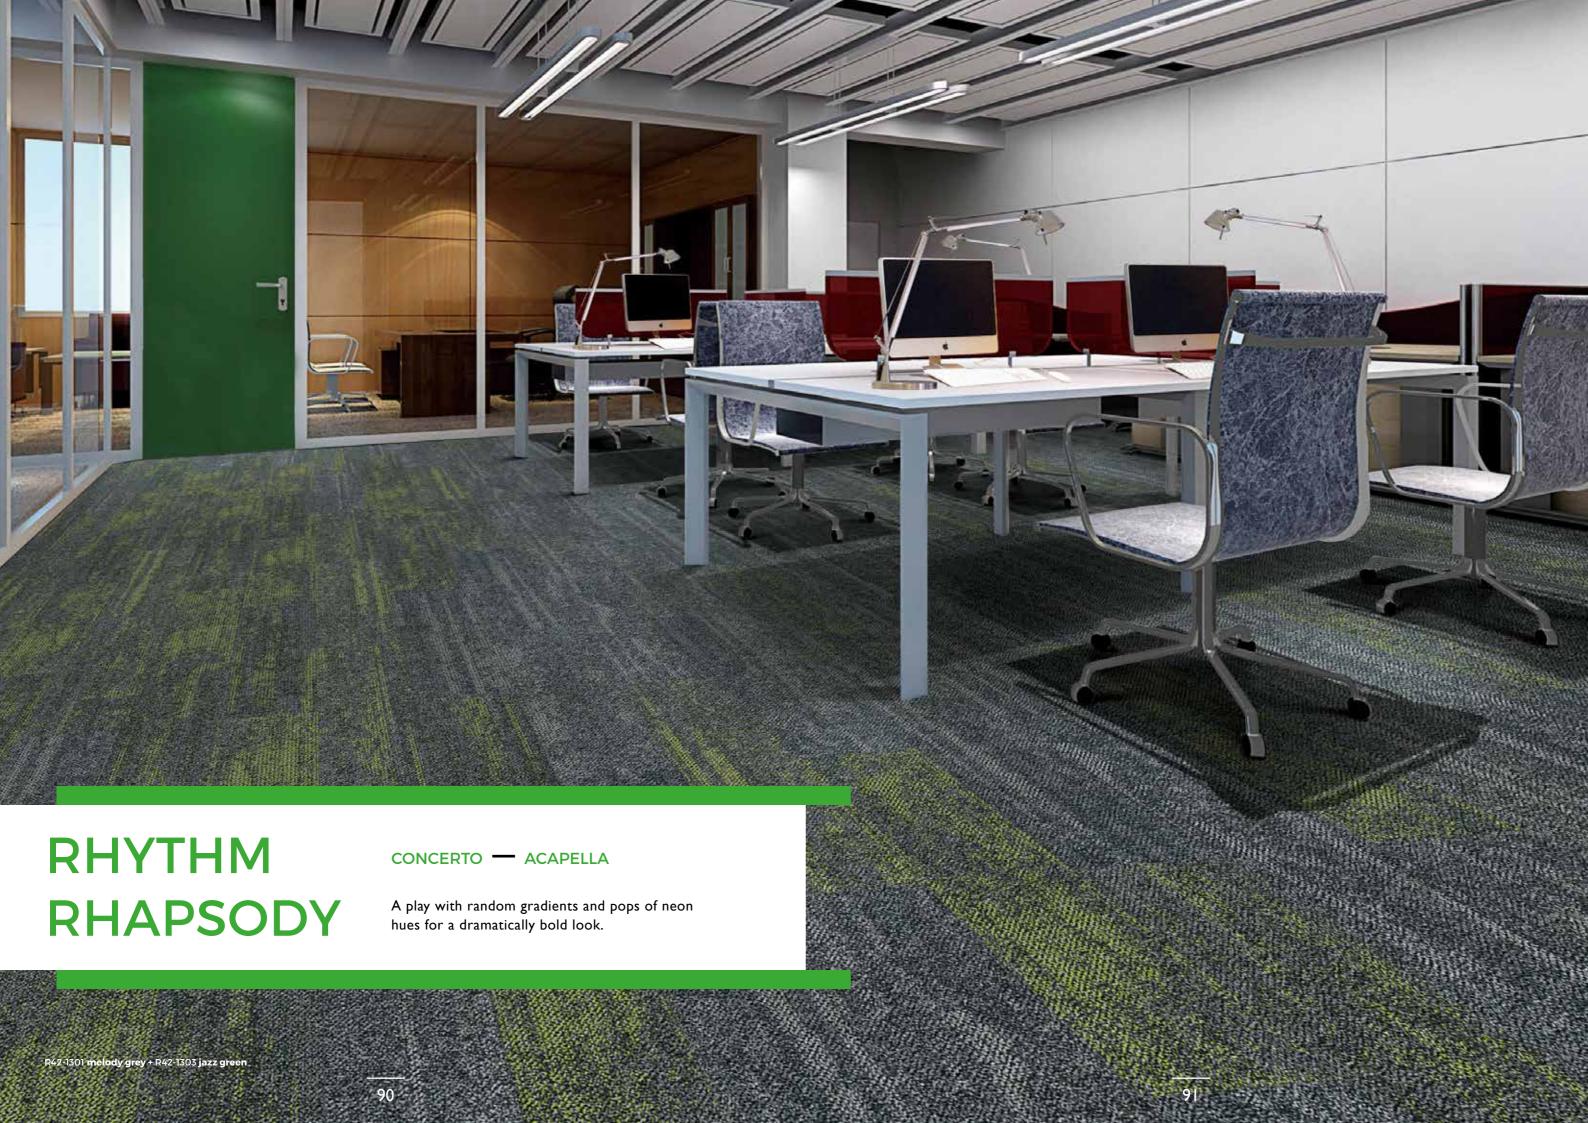

ACAPELLA



SPECIFICATIONS

Fibre Construction 100% Solution Dyed Olefin 1/12" Multi-Level Loop Graphic

Pile Weight Total Weight

Pile Height


ca. 678g/m2 (20oz/y²) ca. 3670g/m2 (108oz/y²) ca. 4mm (± 0.5mm)

Total Height
Backing
No. of Tiles/Box
Standard Size

ca. 6mm (± 0.5mm)
FibraTuff Back™
20 pcs (5m²)
25cm x 100cm

Recommended Usage Installation Method Warranties Medium Contract
Ashlar, Brick or Herringbone
10-year Limited Wear Warranty
Lifetime Antishock Carpet Warranty

CONCERTO

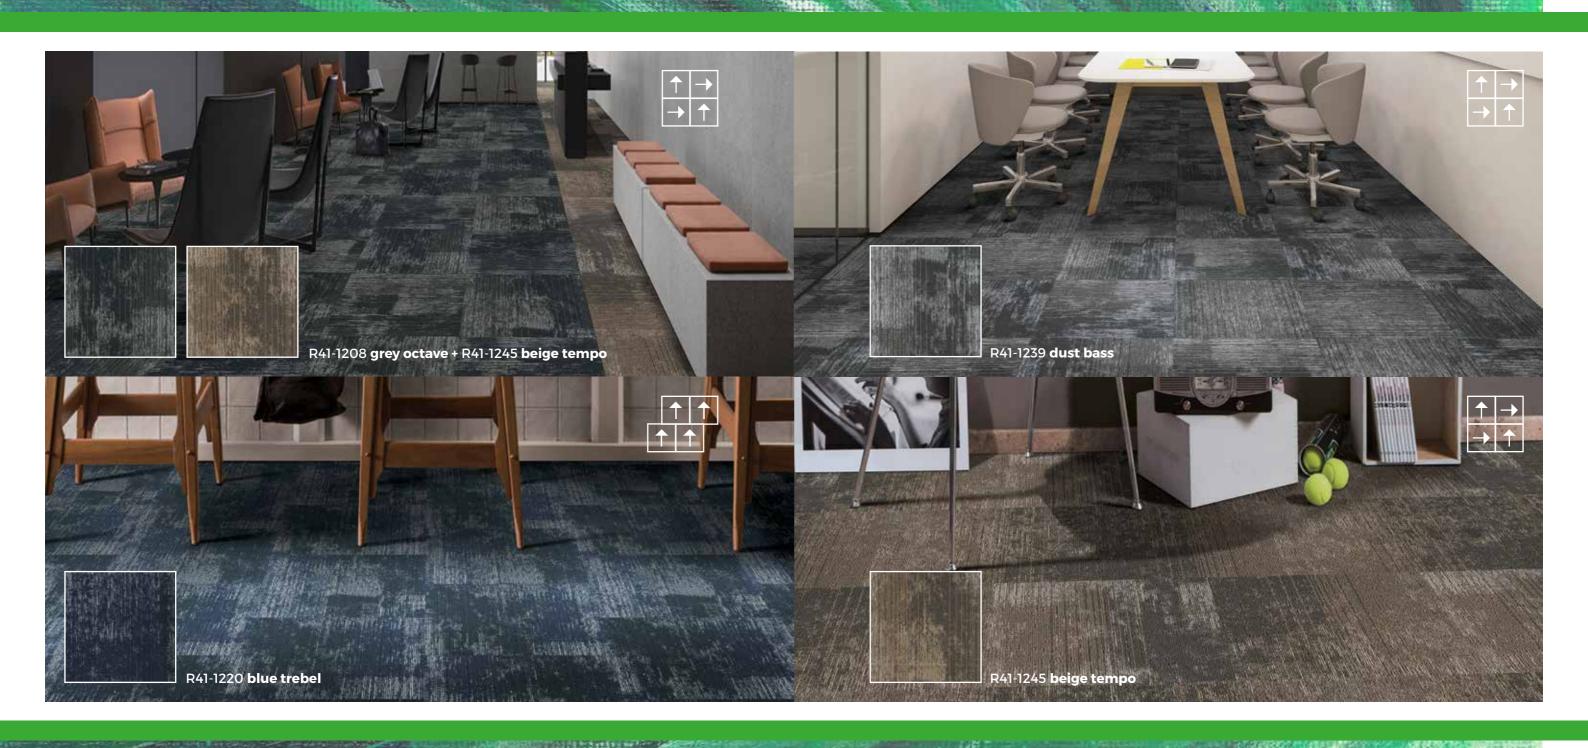

SPECIFICATIONS

Fibre Construction 100% Solution Dyed Olefin 1/12" Multi-Level Loop Graphic

Pile Weight Total Weight

Pile Height

ca. 675g/m² (20oz/y²) ca. 3600g/m² (106oz/y²) ca. 4mm (± 0.5mm)

Total Height
Backing
No. of Tiles/Box
Standard Size

ca. 6mm (± 0.5mm)
FibraTuff Back™
20 pcs (5m²)
50cm x 50cm

Recommended Usage Installation Method Warranties Medium Contract
Ashlar, Brick or Herringbone
10-year Limited Wear Warranty
Lifetime Antishock Carpet Warranty



Installation Guide

Proper installation is a critical element to ensure Amazon Carpet Tiles continue to provide years and years of worry-free use. Be it DIY or with the use of professional installers, it is encouraged to adhere to appropriate installation methods to get the best out of your Amazon Carpet Tiles.

SUBFLOOR PREPARATION

Before laying a single piece of Amazon Carpet Tile, the subfloor must be smooth, firm, flat, clean, dry and free from defects. In addition, the following must be strictly adhered:

- Room temperature of installation site must be between 18°C (65°F) and 36°C (95°F) prior to installation
- Humidity level must be monitored and maintained at 10% to 65% relative humidity
- All adhesives and flooring must be kept in the same environment to acclimatise at least 24 hours before installation begins. All flooring must be unpacked, and if possible loose laid, to acclimatise
- Ensure no traces of water or moisture is present in any subfloor type. Conduct a moisture test if unsure as moisture retention is the leading cause of installation failure

The above is vital to ensure good adhesion and great aesthetic appearance; as well as minimise flaws or irregularities from showing.

Preparation methods also differ with the type and condition of existing subfloor, as follows:

EXISTING SUBFLOOR TYPE			
Resilient Vinyl	Wood	Concrete	Ceramic, Terrazzo or Mosaic Tiles
 Damaged tiles to be replaced or patched with underlay Scrape all residue such as adhesives, paint and dirt from the subfloor Floor must be level and free from any blemishes Dry mop and sweep entire floor to remove surface sand, soil and debris Ensure that the subfloor is completely dry 	It is recommended to use a plywood underlay over the existing hardwood All holes, indentations and open joins must be repaired and sealed The underlay board must be smooth, clean, dry and dust free	 Any polish, paint, residue must be completely removed from the subfloor In newly constructed buildings, please allow drying time of 7 to 14 days to ensure no moisture is retained Ensure floor surface is level and free from any blemishes. Use a scraper to flatten surface if necessary Dry mop and sweep entire floor to remove surface sand, soil and debris Ensure that the subfloor is completely dry 	 Check for loose, unstable or broken tiles Remove loose pieces and then fill the holes. Ensure to smoothen and level the filled out surface Use a filler or primer to fill all old tile grout lines to prevent sinking of carpet tiles Ensure floor surface is level and free from any blemishes. Use a scraper to flatten surface if necessary Dry mop and sweep entire floor to remove surface sand, soil and debris Ensure that the subfloor is completely dry

Please ensure that proper protective gear such as breathing masks are worn at all times during subfloor prep and installation to protect against inhaling dust, particles and fumes.

INSTALLATION

Once the subfloor is properly prepared, the laying work becomes that much easier. However, it is recommended that installation is conducted according to standard practises to ensure your Amazon Carpet Tiles retains its durability, resilience and beauty.

It is important to have all requisite tools at hand such as rulers, cutters, adhesives, spreaders, rollers and compass dividers before commencing the installation.

1.

Check to ensure the products you have are sufficient for the installation space and are of the same batch and/or lot number. Differing batch or lot numbers can create slightly uneven colour consistency or shading issues when installed.

3.

All carpet tile designs come with an arrow printed on the backing side. This works as a guide that helps ensure that the laying pattern you choose is consistent throughout the installation. Common laying patterns are as follows:



↑ → → ↑

Quarter Turn

Monolithic

_ . .

<u>†</u> †

Ashlar

2.

Plan the layout of the installation by finding the exact centre of the room. Divide the room into equal quadrants by making two perpendicular lines on the subfloor intersecting at the centre point.

4.

Pick a quadrant to start and begin applying adhesive, remember only to use Amazon-approved adhesives to prevent void of our structural warranty. Adhesives are also highly-flammable, avoid all contact with open flames or sparks.

5

Work on small portions of the underfloor at a time when applying adhesive, optimum adhesive usage is 0.3 to 0.45 kg per square metre. Be sure to smoothen out the adhesive and make sure no adhesive puddle is present.

7.

Leave a distance of 1mm from the wall and the edge of the tile and always remember to press the tiles down as you lay for maximum adhesion. 6.

Approximately 20 to 30 minutes after applying adhesive, or when the adhesive becomes tacky, begin laying the tiles.

8.

It is recommended to roll the floor upon installation to ensure the tiles are firmly stuck to the surface of the underfloor. Newly laid carpet tiles needs time to cure, so avoid moving furniture onto floor for at least 24 hours after installation.

9.

To minimise the wear on new carpets, especially when castor chairs are used at the installation site, it is recommended to use chair pads. This will prolong the appearance of the carpet at heavy traffic and usage areas.



Care & Maintenance

The better you care for your carpet, the longer it lasts. Proper care, along with a consistent maintenance programme can dramatically extend the life of your carpet, while prolonging appearance and colour.

1.

When moving furniture onto carpet, do not drag across the floor to prevent loosening or unravelling of the yarn. Also ensure items are carefully and lightly placed onto the floor to minimise indentations.

2.

Use appropriate protectors on furniture or use chair pads to lower the degree of wear and tear over extended use.

5

Most spills and stains, when attended to immediately, can be removed with water and paper towel. Use solvent or detergent only as a last resort to prevent the colour of your carpet to wear-off at the stain spot. Test solvents and detergents on an inconspicuous area before applying.

6


Regular vacuuming is the most important aspect of carpet maintenance. As most modern carpets are engineered to hold dirt and dust within the yarn pile, it is recommended to vacuum the carpet based on the amount of traffic a particular carpeted area experiences. Heavy traffic areas require daily vacuuming while light traffic areas can be vacuumed once a week.

3.

It is recommended to place a dirt-trapping mat at the entrance doorway to reduce tracked-in dirt, stains and moisture. 4.

Attend to spills immediately with an absorbent paper towel to prevent the spill from turning into a permanent stain. Remember to blot the spill and not rub as this will spread the stain deeper into the fibres.

Scheduled deep cleaning is recommended based on the volume of foot traffic in a carpeted area. This usually involves the use of professional carpet cleaners that will wet clean the carpet to extract dirt and soil embedded deep within the carpet fibres. A deep clean will have restorative effects and extend the life of the carpet.

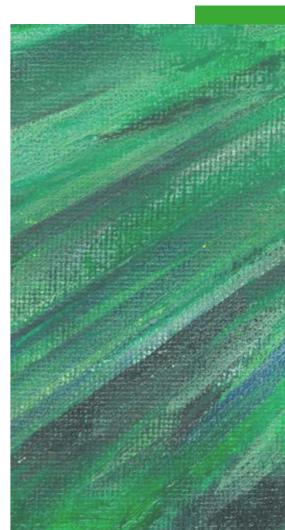




SPOT REMOVAL GUIDE

Stubborn stains, if not treated immediately, can ruin the look and feel of any carpet. Just use these steps to get tough stains off your carpet the easy, fast and safe way.

STEP 1: Identify the Stain and Clean Accordingly				
Alcohol, Coffee, Tea or Liquid Food Spots	Chocolate, Sweets, Ice Cream, Soft Drinks or Blood			
 Blot surplus spills Use detergent + vinegar solution to dab off stain from outer edge of stain Frequently blot with dry cloth 	Scrape excess off with blunt knife Use detergent to dab off stain from outer edge of stain Continue with Ammonia solution and then blot until dry			
Solids, Fats, Tar, Chewing Gum, Oils or Ointment	Pizza, Tomato Sauces & amp; Unknown Stains			
 Scrape excess off with blunt knife Dry blot the area first, followed by detergent + vinegar solution Blot until dry 	 Scrape or blot surplus spillage Dry blot the area first, followed by warm water, then blot dry If required, continue with detergent solution and blot dry 			
STEP 2: Final Rinse				
-	-			

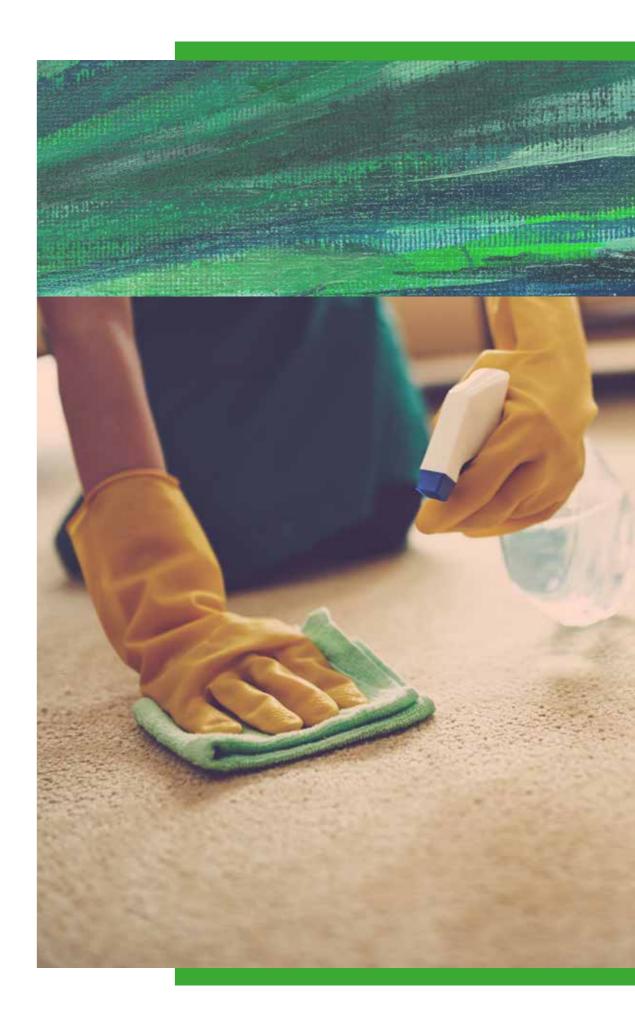

Warranties & Certifications

WARRANTIES



Amazon Ready is warranted against manufacturing defects and premature wear for up to 15 years under normal use in commercial installations.



Amazon Ready is warranted against the build-up of static discharge throughout the lifetime of the carpet.

CERTIFICATIONS



Certified as Environmentally Friendly Carpets



Indoor Air Quality Certified for Low VOC Emissions



ISO 14001:2004 certified for Environmental Management System

Index

CONTENT PAGE NUMBER AMZ+ Backings 14, 16 & 23 Carpet Craft 11, 15 - 17, 24 - 25, 96 & 105 Environment 11, 12 & 23 Features Fire Resistance 15, 23 21 - 23 & 96 - 99 Installation ISO 14001:2004 25 & 105 Maintenance 100 13, 15 - 17, 19 & 25 Recycled reLoop Initiative 17 Singapore Green Label 15 & 25 15 & 17 Sizes 96 - 98 Subfloor Sustainability 13, 15 - 17, 24 - 25 **VOCs** 23 & 25 Warranties 104 PAGE NUMBER

PATTERN/DESIGN


Linear 32 - 33, 78 - 81 62 - 67, 70 - 71, 74 - 75, 92 - 95 Linear Abstract Abstract 42 - 45, 86 - 89 Gradient 46 - 49, 52 - 53, 82 - 83 28 - 31, 36 - 39, 54 - 59, 72 - 73 Solid

PILE WEIGHT IN OUNCE

18 oz/y² 86 - 87 78 - 83, 92 - 95 20 oz/y² 46 - 49 22 oz/y² 24 oz/y² 32 - 33, 42 - 45, 52 - 55, 62 - 67, 72 - 75, 88 - 89, 28 - 31 26 oz/y² 70 - 71 28 oz/y² 36 - 37 72 oz/y² 103 oz/y² 38 - 39 106 oz/y² 56 - 59

PAGE NUMBER



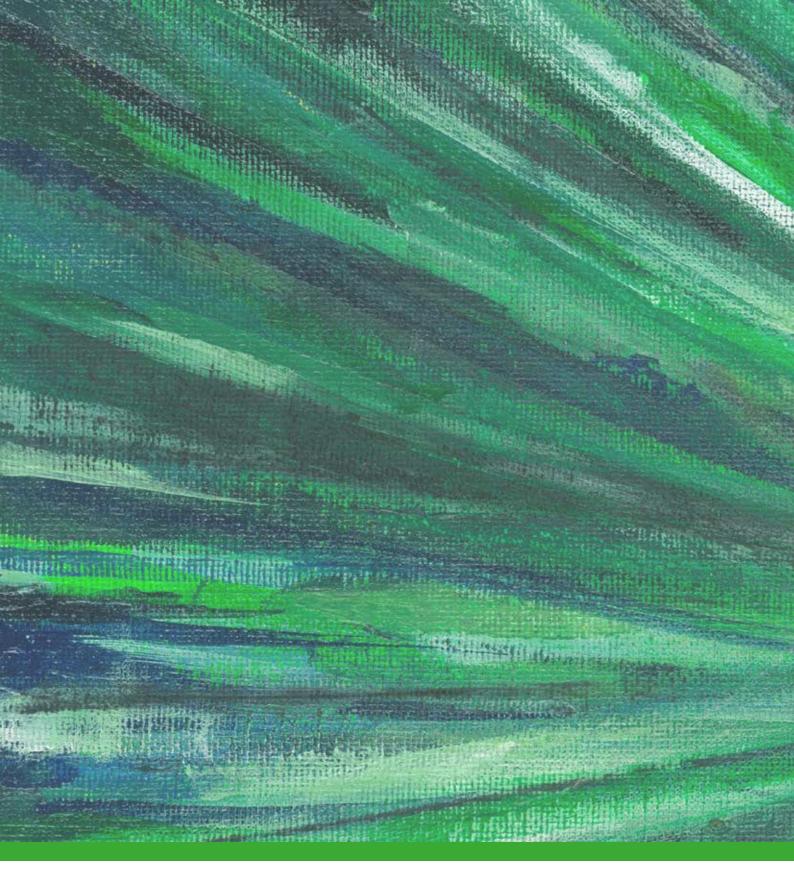



$\hbox{@Amazon Flooring International}$

All trademarks indicated in this publication are property of their respective owners. Information and specifications contained herein are accurate at the time of printing and may change without notice. All images are for illustration purposes only and colours of actual product may differ from the images contained herein.









