



**AMAZONESSENTIALS®**  
carpet tiles



**2025**  
COLLECTION

# AMAZON ESSENTIALS BROCHURE

GAMBIT | UNITY | PULSE |  
DECADE | CENTURY |  
MILLENNIAL | BASE | MESH |  
TANGLE | BLOCK | BASELINE |  
SHOCKWAVE | SKYLAR |  
THESPIAN | **COSMIC<sup>NEW</sup>** |  
**MIMIC<sup>NEW</sup>** | **MAJESTIC<sup>NEW</sup>** |  
**GALACTIC<sup>NEW</sup>** | **WARBLE<sup>NEW</sup>**

# OUTSTANDING PERFORMANCE UNDER YOUR FEET

The better you care for your carpet, the longer it lasts. Proper care, along with a consistent maintenance programme can dramatically extend the life of your carpet, while prolonging appearance and colour.



PrecisionMax™

## MADE FOR PRECISE, SEAMLESS FINISH

Amazon carpet tiles are produced under stringent, fully-automated processes to ensure every tile is close to the exact measured specification. This enables the tiles to be easily installed without gaps or ridges, resulting in a seamless end finish.



WearLoc™

## INNOVATIVELY TOUGH

On the surface, Amazon carpet tiles are plush and soft-to-the-touch. But within lies attributes that can withstand the demands of daily use. The smart fusion of select yarns with tough backings, along with sturdy tufting delivers carpets that look new and last longer.



HushTech™

## THE TECHNOLOGY FOR ADDED SILENCE

All Amazon carpet tiles are inherently quiet underfoot, yet HushTech makes them that much better at absorbing impact and dissipating vibrations. It is a technology that pairs thick acoustically-enhanced backings – called Hush Back – within the layers of tiles for remarkable sound dampening capabilities, in addition to exceptional underfoot comfort.



FiberLogic™

## QUALITY YARNS FROM THE WORLD'S BEST

When it comes to carpet flooring, the yarn makes all the difference. Every carpet has to meet standards of beauty, stain resistance, wear resistance and overall toughness. At Amazon, we only use superior fibers from reputed makers such as Antron®, Invista™ and Universal® Fibers.



SmartResist™

## ACTIVE MOLECULAR STAIN RESISTANCE

Constructed with fibers that actively resist stains, spills, dirt and grime; Amazon carpets ensure life's little mishaps stay little. All it takes is gentle scrubbing to remove even tough stain culprits such as coffee, ink, cola and lipstick.



FireResista™

## FLAME-RESISTANCE CERTIFIED

Amazon carpets have undergone scrutiny by the American Society for Testing & Materials (ASTM) and passed stringent flooring fire resistance tests. This means our carpets are better at resisting flames and will defy the spread of fire more effectively.



BreatheEZY™

## IMPROVED AIR QUALITY

Amazon carpet tiles are effective at trapping airborne dust, allergens and particles. Combined with regular vacuuming and the fact that our carpets are low-VOC certified, indoor air stays clean and healthy.



VariSize™

## MULTI SIZE OPTIONS

Amazon Modulo carpet tiles are available in various optional sizes – including extra-large squares and planks – in addition to the standard 50 cm x 50 cm tile for unique and exciting flooring configurations.



EcoSense™

## SUSTAINABILITY IN EVERY TILE

Amazon is always committed to environmental compliance and sustainable manufacturing practices. Aside from using recycled content in our carpets, Amazon Modulo is also:

- 1) A green product that contributes towards satisfying LEED® credits. 2) Green Label compliant for low emissions of VOC by The Carpet & Rug Institute (CRI). 3) GreenGuard certified for low chemical emissions by UL Environment, USA.



RavelStop™

## EVERY YARN LOCKED IN PLACE


Even in the unlikely event of a loose yarn, Amazon's unique interlocking tufting method ensures it will never ravel or zipper. A multi-layered construction featuring resilient non-woven material, along with options such as fibreglass, bitumen and PVC layers make for a firm yarn lock. A final layer of high-density non-woven cushion then seals the package for superior lamination strength.





## BACKED BY INNOVATION


How a carpet tile performs on top is very much dependent on what's underneath. Amazon's range of backings has been formulated and tested to provide enhanced durability and excellent dimensional stability.

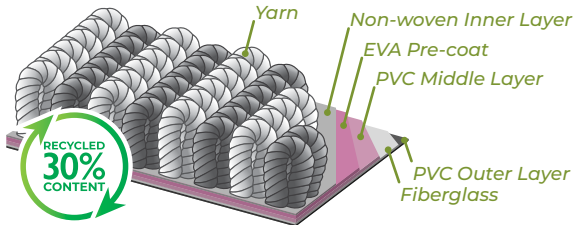

### Synth Back™

STANDARD BACKING


Sturdy 5-layer PVC construction with fiberglass reinforcement that is resistant to delamination, ravelling and 100% impermeable.

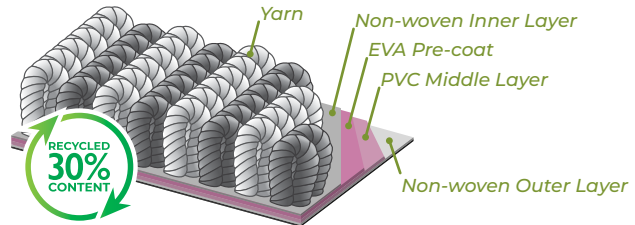

### Synth HushBack™

HUSH TECH


PVC backing enhanced with HushTech for superior sound absorption and underfoot comfort without diminishing dimensional stability.

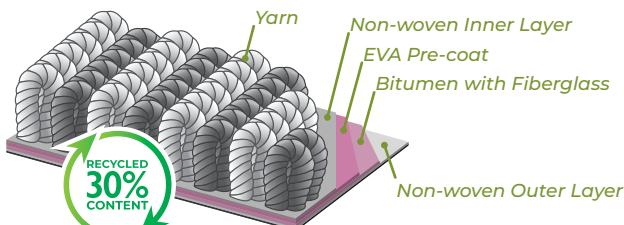

### BioFlex Back™

STANDARD BACKING

An eco-friendly option with a revolutionarily thin bitumen layer for extra flexibility and stable performance in high temperatures and humidity.

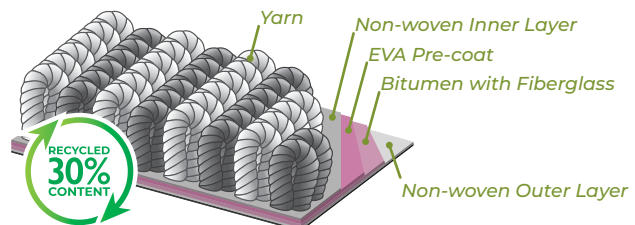


### BioFlex HushBack™

HUSH TECH

An eco-friendly backing enhanced with HushTech for superior sound absorption and underfoot comfort while still being flexible and durable.

## SIZE MATTERS

Varying tile sizes allow for unique and exciting flooring configurations. Amazon Primo carpet tiles are available in various optional sizes in addition to the standard 50cm x 50cm tile.

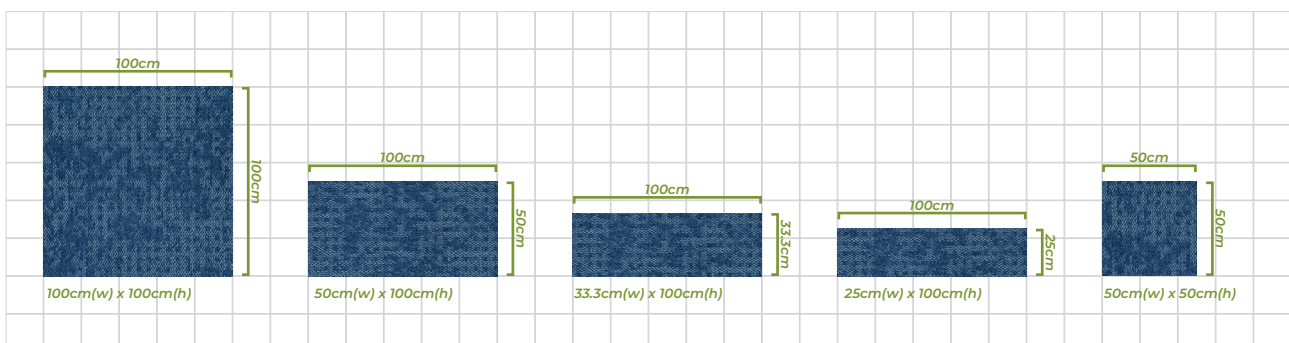

# IF IT'S CHEAP, THERE'S A REASON

Going cheap could cost you in the long run. If you ever consider buying cheaper, lower quality carpet tiles; the hidden costs could far outweigh the lower price you pay.

## LACK OF SEAMLESSNESS

When you see clear join-lines and uneven carpet tiles, it may not be entirely due to a substandard installation. Cheaper carpet tiles are often not cut to exact size and usually are of a lower pile density, making small imperfections obvious. Amazon carpet tiles however are made for a precise, seamless finish with **PrecisionMax™ Technology** and are inherently of higher pile density so that minor imperfections are well concealed.

## UNABLE TO WITHSTAND UNRAVELLING

A single loose yarn can cause a whole tile to ravel or zipper, contributing to premature aging and wear. This is usually caused by substandard tufting techniques and the use of cheap polyester material as the primary backing. Amazon carpet tiles however features **RavelStop™**, a unique interlocking tufting method combined with superior bonding technology using a high-grade non-woven material as the primary backing that prevents unravelling from loose yarns.

## PRONE TO CURLING

Curling is a problem when edges of carpet tiles come up off the floor, which makes the floor look uneven and visually distracting. Usually, this is caused by low quality carpet tiles that are thinner and lighter by nature. Amazon carpet tiles are inherently thicker and come with heavier backings, which effectively lays flat with lower incidences of curling.

## DIFFICULT TO REMOVE STAINS

All types of carpets are prone to staining, but the ability to easily remove tough stains makes all the difference. Cheaper carpet tiles are made of low quality fibres that soak-up stains without any degree of resistance. Amazon carpet tiles features **SmartResist™ Technology**, where the fibres actively resist stains, spills, dirt and grime; making clean-up a hassle-free affair.

## LOWER FIRE RESISTANCE

Effective fire resistance is an important aspect for any commercial flooring installation. Cheaper, low-quality carpet tiles are usually not tested for their ability to resist fire. Amazon carpet tiles however conforms to fire resistance standards as tested by the **American Society of Testing & Material (ASTM)**.

## HIGHER VOC CONTENT

Carpets are inherently low in VOCs amongst all commercial flooring options. However, carpet tiles that are made from cheap yarns and substandard backing materials can emit VOC levels that are well beyond the benchmark level. Amazon carpet tiles are low-VOC certified and conform to **CRI's Green Label Plus standards**.

# THE CARPET TILES ADVANTAGE

Carpet tiles are certainly a viable flooring option for virtually any application; be it corporate, commercial, retail or residential. In its 50-year existence, carpet tiles have grown in stature and can be seen decorating the floors of some of the world's most iconic properties. Today, advanced manufacturing technology has paved the way for outstandingly superior and feature-packed carpet tiles that deliver valuable benefits:

**1**

### IT'S MODULAR

*The nifty size of each carpet tile means it is easy to handle and can be installed in stages, as well as around furniture. If a spill or soiling occurs in future, the affected tile can be simply removed and cleaned or replaced entirely.*

**2**

### CREATIVE FREEDOM

*Each tile represents a new design idea. Unique and trendy looks can be achieved by mixing and matching tiles of different colours and patterns. There are hundreds if not thousands of design possibilities, limited only by the imagination.*

**3**

### PORTABLE

*Carpet tiles come in easy to carry boxes, which can be transported in stacks or even vertically. They can also be stored with ease, without special needs, for long periods of time.*

**4**

### REMOVE & REUSE

*Carpet tiles do not have to be permanently installed. They can also be loose laid, making them easily removable and re-installed at a new location without much hassle.*

**5**

### COST EFFECTIVE

*Most carpet tiles can be installed on top of other solid flooring such as laminate, vinyl or ceramic tiles without the need for expensive underlay. This saves much sub-floor prep work and ultimately installation investment.*






AMAZON ESSENTIALS<sup>®</sup>  
carpet tiles

# AMAZON ESSENTIALS BROCHURE

1 - 6








# AMAZON ESSENTIALS BROCHURE

2 - 6


## CENTURY



M9005-1




M9005-2



M9005-3





M9005-4




M9005-5

## MILLENNIAL

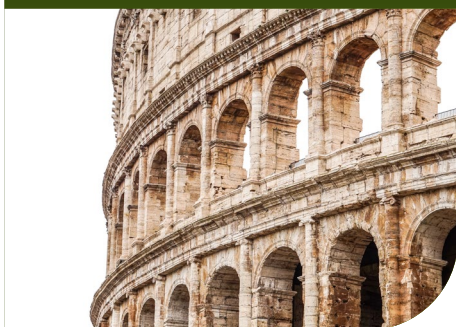


M9006-1



M9006-2



M9006-3



M9006-4



M9006-5

## BASE



M9007-3




M9007-5




M9007-9




M9007-10



M9007-23



M9007-26




M9007-29



M9007-30

## MESH

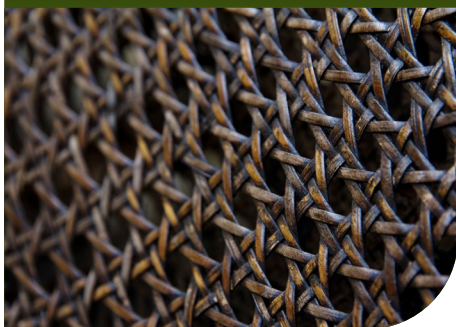

M9011-1



M9011-2



M9011-3



M9011-4





AMAZON ESSENTIALS<sup>®</sup>  
carpet tiles


# AMAZON ESSENTIALS BROCHURE

3 - 6

## TANGLE



## BLOCK

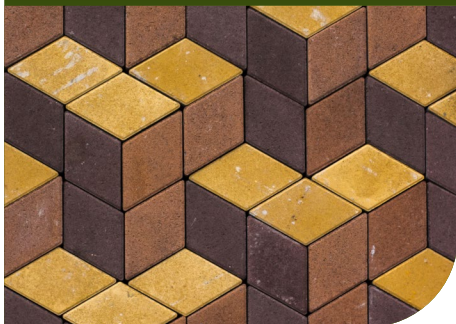

## BASELINE



## SHOCKWAVE




M9012-1



M9012-2



M9012-3



M9012-4




M9013-1



M9013-2



M9013-3



M9013-4



M16-01



M16-03



M16-07



M16-08



M17-01



M17-03



M17-05



M17-08



AMAZON ESSENTIALS<sup>®</sup>  
carpet tiles

# AMAZON ESSENTIALS BROCHURE

4 - 6







**AMAZON ESSENTIALS<sup>®</sup>**  
carpet tiles

# AMAZON ESSENTIALS BROCHURE

5 - 6



E23-05



E23-06



E23-07



E23-08

**2-2**



M9016-2



M9016-3




M9016-6




M9016-7



M9017-1



M9017-2



M9017-3




M9017-4



M9018-1



M9018-2



M9018-3



M9018-4



# AMAZON ESSENTIALS BROCHURE

6 - 6



M9019-1



M9019-2



M9019-3



M9019-4




M9020-2




M9020-3




M9020-4



M9020-7



M9020-22



M9020-33



M9020-44



M9020-77

**OUTSTANDING PERFORMANCE  
UNDER YOUR FEET**

P02

**BACKED BY INNOVATION**

P03

**SIZE MATTERS**

P03

**IF IT'S CHEAP,  
THERE'S A REASON**

P04

**THE CARPET TILES  
ADVANTAGE**

P04

**CARE &  
MAINTENANCE**

P90

**SPOT REMOVAL  
GUIDE**

P90

**INSTALLATION  
GUIDE**

P91






**AMAZON ESSENTIALS®**  
carpet tiles


PP

PVC


# GAMBIT




Quarter Turn



Ashlar



Brick



## PRODUCT SPECIFICATION

**CONSTRUCTION** 1/12" Multi-level Loop

**FIBRE** MaxLustre PP


**PILE WEIGHT** 750g/m<sup>2</sup> or 22oz/yd<sup>2</sup>

**PILE HEIGHT** 2.5 - 3.5mm

**TOTAL THICKNESS** 5.0 - 6.0mm

**BACKING** Synth PVC Back™


**NO. OF TILES/ BOX** 20 pcs / 54sqft (5sqm)




M9001-2  
**GAMBIT STONE**



M9001-3  
**GAMBIT BROWN**



M9001-4  
**GAMBIT BLACK**



M9001-5  
**GAMBIT NAVY**







**AMAZON ESSENTIALS®**  
carpet tiles


## GAMBIT

PVC

PP




M9001-2  
GAMBIT STONE



Quarter Turn



M9001-3  
GAMBIT BROWN



Quarter Turn



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

12





**AMAZON ESSENTIALS®**  
carpet tiles

## GAMBIT

PVC

PP



M9001-4  
GAMBIT BLACK



Quarter Turn



M9001-5  
GAMBIT NAVY



Quarter Turn



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

13





**AMAZON ESSENTIALS®**  
carpet tiles

# GAMBIT

PP

PVC

## PRODUCT SPECIFICATION

**CONSTRUCTION** 1/12" Multi-level Loop

**FIBRE** MaxLustre PP

**PILE WEIGHT** 750g/m<sup>2</sup> or 22oz/yd<sup>2</sup>

**PILE HEIGHT** 2.5 - 3.5mm

**TOTAL THICKNESS** 5.0 - 6.0mm

**BACKING** Synth PVC Back™

**NO. OF TILES/ BOX** 20 pcs / 54sqft (5sqm)

## ENVIRONMENTAL SPECIFICATION

**SUSTAINABILITY** Production that adheres to ISO14001 and ISO9001 with all yarns used are Solution dyed to minimize use of water and exclude any effluent.

## PERFORMANCE SPECIFICATION

**STATIC ELECTRICITY** Permanent lifetime protection - less than 3.5kV

**LODGING-RESISTANCE** Superior fibre resistance

**WEAR WARRANTY** Warranted not to lose more than 15% pile fibre by weight under normal commercial use within 15 years

**DIMENSIONAL STABILITY** Warranted not to change in size by more than 0.5mm, as well as resistant to doming and dishing under normal use.

**COLOR FASTNESS TO RUBBING** GB/T3920-2008 Standard:  
>Grade 4 for dry rubbing  
>Grade 3 for wet rubbing

## CERTIFICATIONS



Certified to: GB/T 2755 : 2005  
Certification No. : PC011916



Certified to: SIRIM ECO 035 : 2012  
Certification No. : EU000212








**AMAZON ESSENTIALS®**  
carpet tiles


PP

BITUMEN

# UNITY



Quarter Turn



## PRODUCT SPECIFICATION

**CONSTRUCTION** 1/12" Multi-level Loop

**FIBRE** MaxLustre PP


**PILE WEIGHT** 610g/m<sup>2</sup> or 18oz/yd<sup>2</sup>

**PILE HEIGHT** 2.5 - 3.5mm


**TOTAL THICKNESS** 4.5 - 5.5mm

**BACKING** BioFlex Bitumen Back™


**NO. OF TILES/ BOX** 20 pcs / 54sqft (5sqm)




M9002-1  
**UNITY STONE**



M9002-2  
**UNITY STEEL**



M9002-3  
**UNITY BLACK**



M9002-5  
**UNITY NAVY**








**AMAZON ESSENTIALS®**  
carpet tiles

## UNITY

**BITUMEN**

**PP**



M9002-1  
UNITY STONE



Quarter Turn



M9002-2  
UNITY STEEL



Quarter Turn



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

16





**AMAZON ESSENTIALS®**  
carpet tiles


## UNITY

**BITUMEN**


**PP**



M9002-3  
**UNITY BLACK**



Quarter Turn



M9002-5  
**UNITY NAVY**



Quarter Turn



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

17





**AMAZON ESSENTIALS®**  
carpet tiles

# UNITY

**PP**

**BITUMEN**

## PRODUCT SPECIFICATION

CONSTRUCTION	1/12" Multi-level Loop
FIBRE	MaxLustre PP
PILE WEIGHT	610g/m <sup>2</sup> or 18oz/yd <sup>2</sup>
PILE HEIGHT	2.5 - 3.5mm
TOTAL THICKNESS	4.5 - 5.5mm
BACKING	BioFlex Bitumen Back™
NO. OF TILES/ BOX	20 pcs / 54sqft (5sqm)

## ENVIRONMENTAL SPECIFICATION

SUSTAINABILITY	Production that adheres to ISO14001 and ISO9001 with all yarns used are Solution dyed to minimize use of water and exclude any effluent.
----------------	--

## PERFORMANCE SPECIFICATION

STATIC ELECTRICITY	Permanent lifetime protection - less than 3.5kV
LODGING-RESISTANCE	Superior fibre resistance
WEAR WARRANTY	Warranted not to lose more than 15% pile fibre by weight under normal commercial use within 15 years
DIMENSIONAL STABILITY	Warranted not to change in size by more than 0.5mm, as well as resistant to doming and dishing under normal use.
COLOR FASTNESS TO RUBBING	GB/T3920-2008 Standard: >Grade 4 for dry rubbing >Grade 3 for wet rubbing

## CERTIFICATIONS



Certified to: GB/T 2755 : 2005  
Certification No.: PC011916



Certified to: SIRIM ECO 035 : 2012  
Certification No.: EL000212








**AMAZON ESSENTIALS®**  
carpet tiles


**PP**

**BITUMEN**

# PULSE



Quarter Turn



## PRODUCT SPECIFICATION

**CONSTRUCTION** 1/12" Multi-level Loop

**FIBRE** MaxLustre PP


**PILE WEIGHT** 610g/m<sup>2</sup> or 18oz/yd<sup>2</sup>

**PILE HEIGHT** 2.5 - 3.5mm


**TOTAL THICKNESS** 4.5 - 5.5mm

**BACKING** BioFlex Bitumen Back™


**NO. OF TILES/ BOX** 20 pcs / 54sqft (5sqm)




M9003-1  
**PULSE PEWTER**



M9003-2  
**PULSE STONE**



M9003-3  
**PULSE BLACK**



M9003-4  
**PULSE NAVY**








**AMAZON ESSENTIALS®**  
carpet tiles


## PULSE

**BITUMEN**

**PP**




M9003-1  
**PULSE PEWTER**



Quarter Turn



M9003-2  
**PULSE STONE**



Quarter Turn



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

20





**AMAZON ESSENTIALS®**  
carpet tiles

## PULSE

**BITUMEN**


**PP**




M9003-3  
**PULSE BLACK**



Quarter Turn



M9003-4  
**PULSE NAVY**



Quarter Turn



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

21



**AMAZON ESSENTIALS®**  
carpet tiles

# PULSE

**PP**

**BITUMEN**

## PRODUCT SPECIFICATION

CONSTRUCTION	1/12" Multi-level Loop
FIBRE	MaxLustre PP
PILE WEIGHT	610g/m <sup>2</sup> or 18oz/yd <sup>2</sup>
PILE HEIGHT	2.5 - 3.5mm
TOTAL THICKNESS	4.5 - 5.5mm
BACKING	BioFlex Bitumen Back™
NO. OF TILES/ BOX	20 pcs / 54sqft (5sqm)

## ENVIRONMENTAL SPECIFICATION

SUSTAINABILITY	Production that adheres to ISO14001 and ISO9001 with all yarns used are Solution dyed to minimize use of water and exclude any effluent.
----------------	--

## PERFORMANCE SPECIFICATION

STATIC ELECTRICITY	Permanent lifetime protection - less than 3.5kV
LODGING-RESISTANCE	Superior fibre resistance
WEAR WARRANTY	Warranted not to lose more than 15% pile fibre by weight under normal commercial use within 15 years
DIMENSIONAL STABILITY	Warranted not to change in size by more than 0.5mm, as well as resistant to doming and dishing under normal use.
COLOR FASTNESS TO RUBBING	GB/T3920-2008 Standard: >Grade 4 for dry rubbing >Grade 3 for wet rubbing

## CERTIFICATIONS



Certified to: GB/T 2755 : 2005  
Certification No.: PC011916



Certified to: SIRIM ECO 035 : 2012  
Certification No.: EU000212








**AMAZON ESSENTIALS®**  
carpet tiles


PP

BITUMEN

# DECADE



Quarter Turn



## PRODUCT SPECIFICATION

**CONSTRUCTION** 1/10" Tufted Loop Pile

**FIBRE** MaxLustre PP

**PILE WEIGHT** 610g/m<sup>2</sup> or 18oz/yd<sup>2</sup>

**PILE HEIGHT** 2.8mm

**TOTAL THICKNESS** 4.5mm

**BACKING** BioFlex Bitumen Back™


**NO. OF TILES/ BOX** 20 pcs / 54sqft (5sqm)



M9004-1  
DECADE STEEL




M9004-2  
DECADE DENIM



M9004-3  
DECADE SAND



M9004-4  
DECADE GREY



M9004-5  
DECADE CRIMSON







**AMAZON ESSENTIALS®**  
carpet tiles

**DECADE**

**BITUMEN**

**PP**



M9004-1  
DECADE STEEL



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

24






**AMAZON**ESSENTIALS®  
carpet tiles

## DECADE

BITUMEN

PP



M9004-2  
DECADE DENIM



M9004-3  
DECADE SAND



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

25





**AMAZON ESSENTIALS®**  
carpet tiles

## DECADE

**BITUMEN**


**PP**



M9004-4  
**DECADE GREY**



Quarter Turn



M9004-5  
**DECADE CRIMSON**



Quarter Turn



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

26





**AMAZON ESSENTIALS®**  
carpet tiles

# DECADE

**PP**

**BITUMEN**

## PRODUCT SPECIFICATION

CONSTRUCTION	1/10" Tufted Loop Pile
FIBRE	MaxLustre PP
PILE WEIGHT	610g/m <sup>2</sup> or 18oz/yd <sup>2</sup>
PILE HEIGHT	2.8mm
TOTAL THICKNESS	4.5mm
BACKING	BioFlex Bitumen Back™
NO. OF TILES/ BOX	20 pcs / 54sqft (5sqm)

## PERFORMANCE SPECIFICATION

### FLAMMABILITY

RADIANT PANEL ASTM E648-06 - ≥1.13 watts/cm<sup>2</sup>

PILE TEST ASTM D2859-06 - 8

SMOKE DENSITY ASTM E662-06 - Max. 450

### COLOR FASTNESS

TO LIGHT AATCC 16E - 5

TO WET & DRY CROCKING AATCC 165 - 5

TO OZONE AATCC 129 - 5

STAIN RESISTANCE AATCC 175-2003 - 10

STATIC PROPENSITY AATCC 134-1996 - less than 4kV

TUFT BIND ASTM D1335 - 8.6lbs

DIMENSIONAL STABILITY AACHEN - <0.1%

## CERTIFICATIONS



Certified to: GB/T 2755 - 2005  
Certification No.: PC011916



Certified to: SIRIM ECO 035 : 2012  
Certification No.: EL000212








**AMAZON ESSENTIALS®**  
carpet tiles


PP

BITUMEN

# CENTURY



Quarter Turn



## PRODUCT SPECIFICATION

**CONSTRUCTION** 1/10" Tufted Loop Pile

**FIBRE** MaxLustre PP

**PILE WEIGHT** 610g/m<sup>2</sup> or 18oz/yd<sup>2</sup>

**PILE HEIGHT** 2.8mm

**TOTAL THICKNESS** 4.5mm

**BACKING** BioFlex Bitumen Back™


**NO. OF TILES/ BOX** 20 pcs / 54sqft (5sqm)




M9005-1  
CENTURY GREEN




M9005-2  
CENTURY CANNARY



M9005-3  
CENTURY RUBY



M9005-4  
CENTURY FOREST



M9005-5  
CENTURY CRIMSON







**AMAZON ESSENTIALS®**  
carpet tiles

## CENTURY

**BITUMEN**


**PP**




M9005-1  
CENTURY GREEN



Quarter Turn



M9005-2  
CENTURY CANNARY



Quarter Turn



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

29






**AMAZON ESSENTIALS®**  
carpet tiles

## CENTURY

**BITUMEN**


**PP**



M9005-3  
CENTURY RUBY



Quarter Turn



M9005-4  
CENTURY FOREST



Quarter Turn



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

30






**AMAZON ESSENTIALS®**  
carpet tiles

**CENTURY**

**BITUMEN**

**PP**



M9005-5  
**CENTURY CRIMSON**



Quarter Turn



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

31





**AMAZON ESSENTIALS®**  
carpet tiles

# CENTURY

**PP**

**BITUMEN**

## PRODUCT SPECIFICATION

CONSTRUCTION	1/10" Tufted Loop Pile
FIBRE	MaxLustre PP
PILE WEIGHT	610g/m <sup>2</sup> or 18oz/yd <sup>2</sup>
PILE HEIGHT	2.8mm
TOTAL THICKNESS	4.5mm
BACKING	BioFlex Bitumen Back™
NO. OF TILES/ BOX	20 pcs / 54sqft (5sqm)

## PERFORMANCE SPECIFICATION

### FLAMMABILITY

RADIANT PANEL ASTM E648-06 -  $\geq 1.13$  watts/cm<sup>2</sup>

PILE TEST ASTM D2859-06 - 8

SMOKE DENSITY ASTM E662-06 - Max. 450

### COLOR FASTNESS

TO LIGHT AATCC 16E - 5

TO WET & DRY CROCKING AATCC 165 - 5

TO OZONE AATCC 129 - 5

STAIN RESISTANCE AATCC 175-2003 - 10

STATIC PROPENSITY AATCC 134-1996 - less than 4kV

TUFT BIND ASTM D1335 - 8.6lbs

DIMENSIONAL STABILITY AACHEN -  $<0.1\%$

## CERTIFICATIONS



Certified to: GB/T 2755 - 2005  
Certification No.: PC011916



Certified to: SIRIM ECO 035 - 2012  
Certification No.: EU000212








**AMAZON ESSENTIALS®**  
carpet tiles


PP

BITUMEN

# MILLENNIAL



Quarter Turn



50cm

## PRODUCT SPECIFICATION

**CONSTRUCTION** 1/10" Tufted Loop Pile

**FIBRE** MaxLustre PP

**PILE WEIGHT** 610g/m<sup>2</sup> or 18oz/yd<sup>2</sup>

**PILE HEIGHT** 3.2mm


**TOTAL THICKNESS** 5.0mm

**BACKING** BioFlex Bitumen Back™


**NO. OF TILES/ BOX** 20 pcs / 54sqft (5sqm)




M9006-1  
MILLENNIAL LIME




M9006-2  
MILLENNIAL CANNARY



M9006-3  
MILLENNIAL RUBY



M9006-4  
MILLENNIAL NAVY



M9006-5  
MILLENNIAL SAPPHIRE








**AMAZON ESSENTIALS®**  
carpet tiles


## MILLENNIAL

**BITUMEN**


**PP**




M9006-1  
**MILLENNIAL LIME**



Quarter Turn



M9006-2  
**MILLENNIAL CANARY**



Quarter Turn



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT






**AMAZON ESSENTIALS®**  
carpet tiles

**MILLENNIAL**

**BITUMEN**

**PP**



M9006-3  
MILLENNIAL RUBY



Quarter turn



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

35






**AMAZON ESSENTIALS®**  
carpet tiles

## MILLENNIAL

**BITUMEN**


**PP**



M9006-4  
MILLENNIAL NAVY



Quarter Turn



M9006-5  
MILLENNIAL SAPPHIRE



Quarter Turn



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

36





**AMAZON ESSENTIALS®**  
carpet tiles

# MILLENNIAL

**PP**

**BITUMEN**

## PRODUCT SPECIFICATION

CONSTRUCTION	1/10" Tufted Loop Pile
FIBRE	MaxLustre PP
PILE WEIGHT	610g/m <sup>2</sup> or 18oz/yd <sup>2</sup>
PILE HEIGHT	3.2mm
TOTAL THICKNESS	5.0mm
BACKING	BioFlex Bitumen Back™
NO. OF TILES/ BOX	20 pcs / 54sqft (5sqm)

## PERFORMANCE SPECIFICATION

### FLAMMABILITY

RADIANT PANEL ASTM E648-06 -  $\geq 1.13$  watts/cm<sup>2</sup>

PILE TEST ASTM D2859-06 - 8

SMOKE DENSITY ASTM E662-06 - Max. 450

### COLOR FASTNESS

TO LIGHT AATCC 16E - 5

TO WET & DRY CROCKING AATCC 165 - 5

TO OZONE AATCC 129 - 5

STAIN RESISTANCE AATCC 175-2003 - 10

STATIC PROPENSITY AATCC 134-1996 - less than 4kV

TUFT BIND ASTM D1335 - 8.6lbs

DIMENSIONAL STABILITY AACHEN -  $<0.1\%$

## CERTIFICATIONS



Certified to: GB/T 2755 - 2005  
Certification No.: PC011916



Certified to: SIRIM ECO 035 - 2012  
Certification No.: EU000212








**AMAZON ESSENTIALS®**  
carpet tiles


PP

BITUMEN

# BASE



Quarter Turn



## PRODUCT SPECIFICATION

**CONSTRUCTION** 1/10" Tufted Loop Pile

**FIBRE** MaxLustre PP


**PILE WEIGHT** 610g/m<sup>2</sup> or 18oz/yd<sup>2</sup>

**PILE HEIGHT** 2.8mm

**TOTAL THICKNESS** 4.5mm

**BACKING** BioFlex Bitumen Back™

**NO. OF TILES/ BOX** 20 pcs / 54sqft (5sqm)




M9007-3  
BASE GREY



M9007-5  
BASE COBALT



M9007-9  
BASE DENIM



M9007-10  
BASE NAVY



M9007-23  
BASE RED



M9007-26  
BASE BLACK



M9007-29  
BASE BEIGE



M9007-30  
BASE GOLD








**AMAZON ESSENTIALS®**  
carpet tiles

**BASE**

**BITUMEN**

**PP**



M9007-3  
BASE GREY



M9007-26  
BASE BLACK




Quarter Turn



M9007-5  
BASE COBALT



M9007-10  
BASE NAVY



Quarter Turn



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

39





**AMAZON ESSENTIALS®**  
carpet tiles


**BASE**

**BITUMEN**


**PP**




M9007-9  
BASE DENIM



M9007-29  
BASE BEIGE



M9007-23  
BASE RED



M9007-30  
BASE GOLD



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

40





## BASE

PP

BITUMEN

### PRODUCT SPECIFICATION

CONSTRUCTION	1/10" Tufted Loop Pile
FIBRE	MaxLustre PP
PILE WEIGHT	610g/m <sup>2</sup> or 18oz/yd <sup>2</sup>
PILE HEIGHT	3.2mm
TOTAL THICKNESS	5.0mm
BACKING	BioFlex Bitumen Back™
NO. OF TILES/ BOX	20 pcs / 54sqft (5sqm)

### PERFORMANCE SPECIFICATION

#### FLAMMABILITY

RADIANT PANEL ASTM E648-06 -  $\geq 1.13$  watts/cm<sup>2</sup>

PILE TEST ASTM D2859-06 - 8

SMOKE DENSITY ASTM E662-06 - Max. 450

#### COLOR FASTNESS

TO LIGHT AATCC 16E - 5

TO WET & DRY CROCKING AATCC 165 - 5

TO OZONE AATCC 129 - 5

STAIN RESISTANCE AATCC 175-2003 - 10

STATIC PROPENSITY AATCC 134-1996 - less than 4kV

TUFT BIND ASTM D1335 - 8.6lbs

DIMENSIONAL STABILITY AACHEN - <0.1%

### CERTIFICATIONS



Certified to: GB/T 2755 - 2005  
Certification No.: PC011916



Certified to: SIRIM ECO 035 - 2012  
Certification No.: EL000212









PP

BITUMEN


## MESH



Herringbone



Ashlar




### PRODUCT SPECIFICATION


CONSTRUCTION	1/12" Tufted Loop Pile
FIBRE	MaxLustre PP
PILE WEIGHT	678g/m <sup>2</sup> or 20oz/yd <sup>2</sup>
PILE HEIGHT	3.0 - 4.5mm
TOTAL THICKNESS	5.0 - 6.0mm
BACKING	BioFlex Bitumen Back™
NO. OF TILES/ BOX	20 pcs / 54sqft (5sqm)



M9011-1 MESH GREY



M9011-2 MESH CARBON



M9011-3 MESH BROWN



M9011-4 MESH NAVY







**AMAZON ESSENTIALS®**  
carpet tiles


## MESH

**BITUMEN**

**PP**




M9011-1 MESH GREY



Herringbone



M9011-2 MESH CARBON



Ashlar



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

43





**AMAZON**ESSENTIALS®  
carpet tiles


## MESH

**BITUMEN**


**PP**



M9011-3 MESH BROWN



Ashlar



M9011-4 MESH NAVY



Herringbone

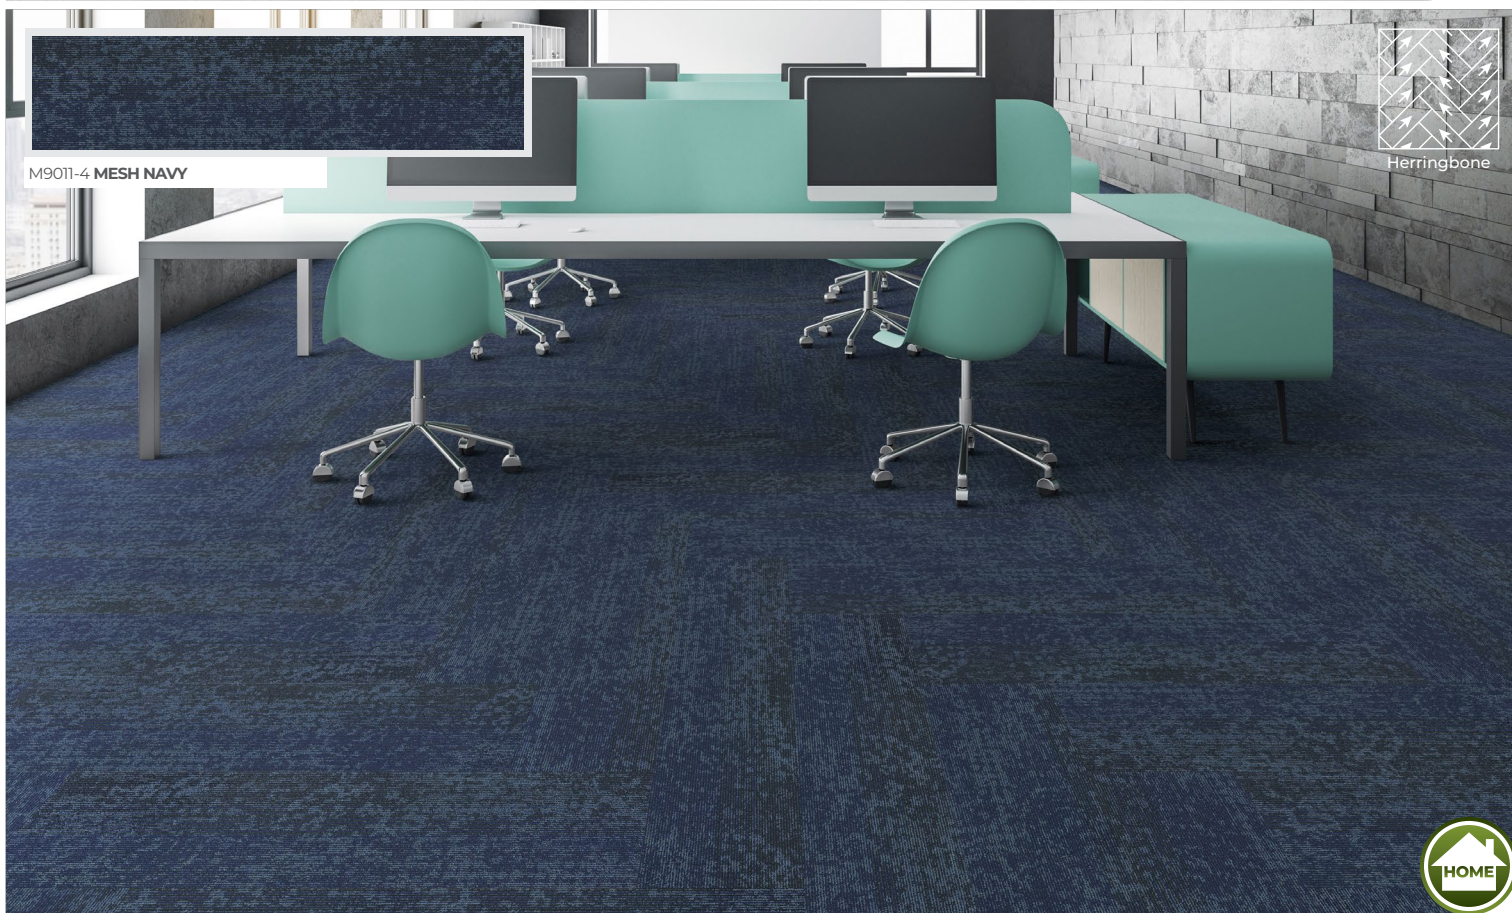


IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

44





## MESH

PP

BITUMEN

### PRODUCT SPECIFICATION

CONSTRUCTION	1/12" Tufted Loop Pile
FIBRE	MaxLustre PP
PILE WEIGHT	678g/m <sup>2</sup> or 20oz/yd <sup>2</sup>
PILE HEIGHT	3.0 - 4.5mm
TOTAL THICKNESS	5.0 - 6.0mm
BACKING	BioFlex Bitumen Back™
NO. OF TILES/ BOX	20 pcs / 54sqft (5sqm)

### ENVIRONMENTAL SPECIFICATION

SUSTAINABILITY	Production that adheres to ISO14001 and ISO9001 with all yarns used are Solution dyed to minimize use of water and exclude any effluent.
----------------	--

### PERFORMANCE SPECIFICATION

STATIC ELECTRICITY	Permanent lifetime protection - less than 3.5kV
LODGING-RESISTANCE	Superior fibre resistance
WEAR WARRANTY	Warranted not to lose more than 15% pile fibre by weight under normal commercial use within 15 years
DIMENSIONAL STABILITY	Warranted not to change in size by more than 0.5mm, as well as resistant to doming and dishing under normal use.
COLOR FASTNESS TO RUBBING	GB/T3920-2008 Standard: >Grade 4 for dry rubbing >Grade 3 for wet rubbing

### CERTIFICATIONS



Certified to: GB/T 2755 : 2005  
Certification No.: PC011916



Certified to: SIRIM ECO 035 : 2012  
Certification No.: EL000212








**AMAZON ESSENTIALS®**  
carpet tiles


PP

BITUMEN


# TANGLE



Herringbone



Ashlar



## PRODUCT SPECIFICATION

**CONSTRUCTION** 1/12" Tufted Loop Pile

**FIBRE** MaxLustre PP


**PILE WEIGHT** 678g/m<sup>2</sup> or 20oz/yd<sup>2</sup>

**PILE HEIGHT** 3.0 - 4.5mm

**TOTAL THICKNESS** 5.0 - 6.0mm

**BACKING** BioFlex Bitumen Back™

**NO. OF TILES/ BOX** 20 pcs / 54sqft (5sqm)




M9012-1 TANGLE GREY



M9012-2 TANGLE CARBON



M9012-3 TANGLE BROWN



M9012-4 TANGLE NAVY







**AMAZON ESSENTIALS®**  
carpet tiles


## TANGLE

**BITUMEN**

**PP**



M9012-1 **TANGLE GREY**



Ashlar



M9012-2 **TANGLE CARBON**



Herringbone

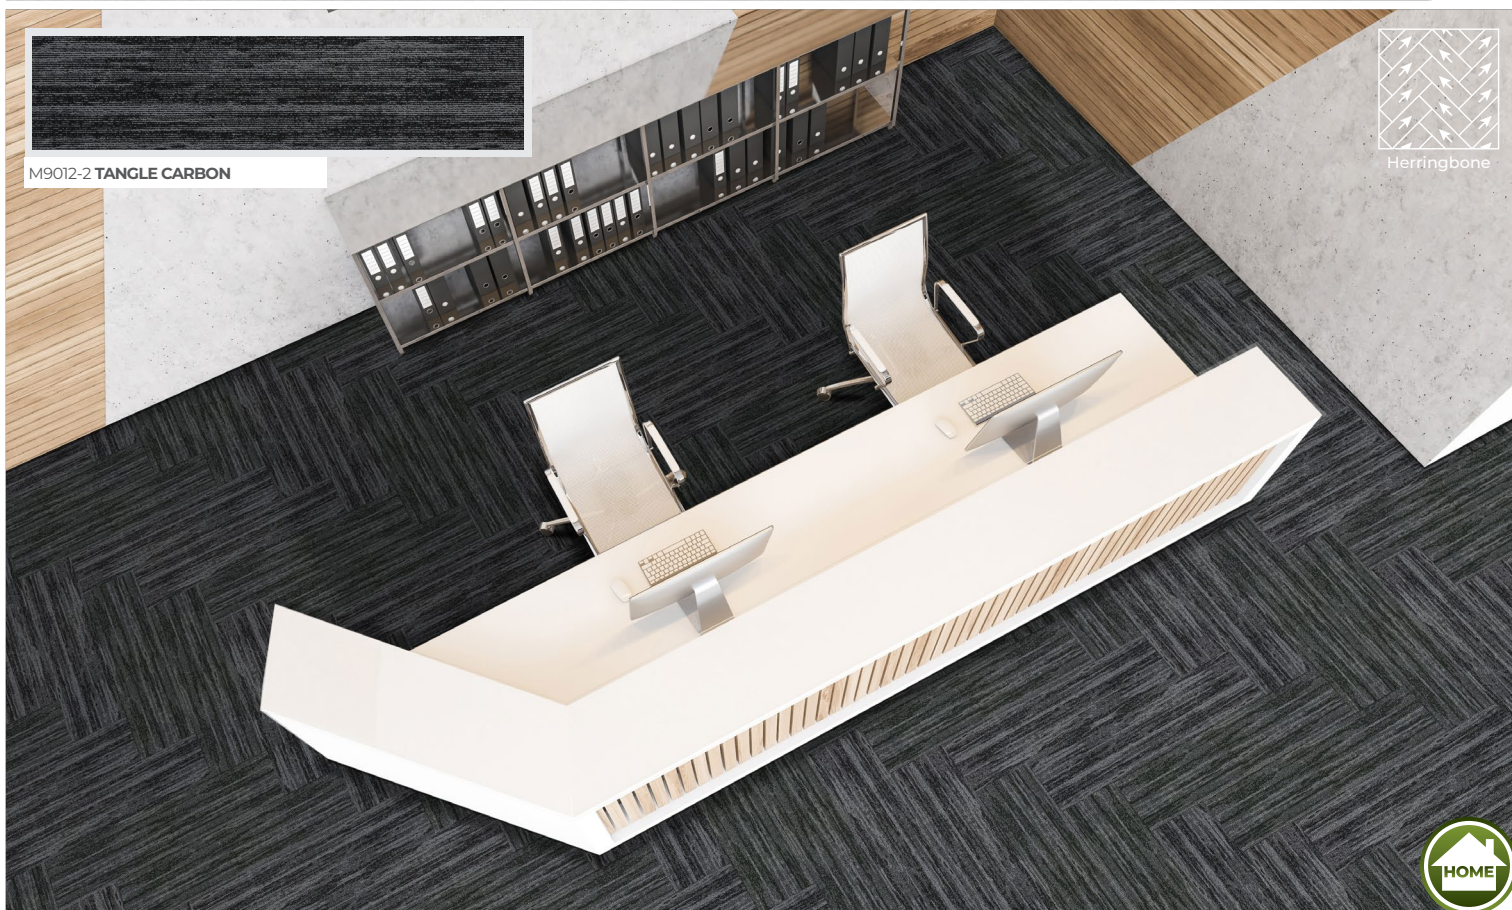


IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

47





**AMAZON ESSENTIALS®**  
carpet tiles


## TANGLE

**BITUMEN**


**PP**



M9012-3 **TANGLE BROWN**



Ashlar



M9012-4 **TANGLE NAVY**



Herringbone



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

48





**AMAZON ESSENTIALS®**  
carpet tiles

# TANGLE

**PP**

**BITUMEN**

## PRODUCT SPECIFICATION

CONSTRUCTION	1/12" Tufted Loop Pile
FIBRE	MaxLustre PP
PILE WEIGHT	678g/m <sup>2</sup> or 20oz/yd <sup>2</sup>
PILE HEIGHT	3.0 - 4.5mm
TOTAL THICKNESS	5.0 - 6.0mm
BACKING	BioFlex Bitumen Back™
NO. OF TILES/ BOX	20 pcs / 54sqft (5sqm)

## ENVIRONMENTAL SPECIFICATION

SUSTAINABILITY	Production that adheres to ISO14001 and ISO9001 with all yarns used are Solution dyed to minimize use of water and exclude any effluent.
----------------	--

## PERFORMANCE SPECIFICATION

STATIC ELECTRICITY	Permanent lifetime protection - less than 3.5kV
LODGING-RESISTANCE	Superior fibre resistance
WEAR WARRANTY	Warranted not to lose more than 15% pile fibre by weight under normal commercial use within 15 years
DIMENSIONAL STABILITY	Warranted not to change in size by more than 0.5mm, as well as resistant to doming and dishing under normal use.
COLOR FASTNESS TO RUBBING	GB/T3920-2008 Standard: >Grade 4 for dry rubbing >Grade 3 for wet rubbing

## CERTIFICATIONS








**AMAZON ESSENTIALS®**  
carpet tiles


PP

BITUMEN


# BLOCK



Herringbone




Ashlar




## PRODUCT SPECIFICATION

CONSTRUCTION	1/12" Tufted Loop Pile
FIBRE	MaxLustre PP
PILE WEIGHT	678g/m <sup>2</sup> or 20oz/yd <sup>2</sup>
PILE HEIGHT	3.0 - 4.5mm
TOTAL THICKNESS	5.0 - 6.0mm
BACKING	BioFlex Bitumen Back™
NO. OF TILES/ BOX	20 pcs / 54sqft (5sqm)




M9013-1 **BLOCK GREY**



M9013-2 **BLOCK CARBON**



M9011-3 **BLOCK BROWN**



M9011-4 **BLOCK NAVY**







**AMAZON ESSENTIALS®**  
carpet tiles


## BLOCK

**BITUMEN**

**PP**



M9013-1 **BLOCK GREY**



Ashlar



M9013-2 **BLOCK CARBON**



Herringbone



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

51





**AMAZON ESSENTIALS®**  
carpet tiles

## BLOCK

**BITUMEN**


**PP**



M9013-3 **BLOCK BROWN**



Ashlar



M9013-4 **BLOCK NAVY**



Herringbone



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

52





## BLOCK

PP

BITUMEN

### PRODUCT SPECIFICATION

CONSTRUCTION	1/12" Tufted Loop Pile
FIBRE	MaxLustre PP
PILE WEIGHT	678g/m <sup>2</sup> or 20oz/yd <sup>2</sup>
PILE HEIGHT	3.0 - 4.5mm
TOTAL THICKNESS	5.0 - 6.0mm
BACKING	BioFlex Bitumen Back™
NO. OF TILES/ BOX	20 pcs / 54sqft (5sqm)

### ENVIRONMENTAL SPECIFICATION

SUSTAINABILITY	Production that adheres to ISO14001 and ISO9001 with all yarns used are Solution dyed to minimize use of water and exclude any effluent.
----------------	--

### PERFORMANCE SPECIFICATION

STATIC ELECTRICITY	Permanent lifetime protection - less than 3.5kV
LODGING-RESISTANCE	Superior fibre resistance
WEAR WARRANTY	Warranted not to lose more than 15% pile fibre by weight under normal commercial use within 15 years
DIMENSIONAL STABILITY	Warranted not to change in size by more than 0.5mm, as well as resistant to doming and dishing under normal use.
COLOR FASTNESS TO RUBBING	GB/T3920-2008 Standard: >Grade 4 for dry rubbing >Grade 3 for wet rubbing

### CERTIFICATIONS



Certified to: GB/T 2755 : 2005  
Certification No. : PC011916



Certified to: SIRIM ECO 035 : 2012  
Certification No. : EU000212








**AMAZON ESSENTIALS®**  
carpet tiles


PP

PVC

# BASELINE




Quarter Turn



## PRODUCT SPECIFICATION


<b>CONSTRUCTION</b>	1/12" Tufted Textured Loop Pile
<b>FIBRE</b>	MaxLustre PP
<b>PILE WEIGHT</b>	750g/m <sup>2</sup> or 22oz/yd <sup>2</sup>
<b>PILE HEIGHT</b>	2.6mm - 4.5mm (±0.5mm)
<b>TOTAL THICKNESS</b>	6.5mm (±0.5mm)
<b>BACKING</b>	Synth PVC Back™
<b>NO. OF TILES/ BOX</b>	20 pcs / 54sqft (5sqm)




M16-01  
**BASELINE BEIGE**



M16-03  
**BASELINE STERLING**



M16-07  
**BASELINE NAVY**



M16-08  
**BASELINE BLACK**







**AMAZON ESSENTIALS®**  
carpet tiles

## BASELINE

PVC

PP



M16-01  
BASELINE BEIGE



Quarter Turn



M16-03  
BASELINE STERLING



Quarter Turn



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

55





**AMAZON ESSENTIALS®**  
carpet tiles

## BASELINE

PVC


PP




M16-07  
BASELINE NAVY



Quarter Turn



M16-08  
BASELINE BLACK



Quarter Turn



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

56





**AMAZON ESSENTIALS®**  
carpet tiles

# BASELINE

PP

PVC

## PRODUCT SPECIFICATION

CONSTRUCTION	1/12" Tufted Textured Loop Pile
FIBRE	MaxLustre PP
PILE WEIGHT	750g/m <sup>2</sup> or 22oz/yd <sup>2</sup>
PILE HEIGHT	2.6mm - 4.5mm (±0.5mm)
TOTAL THICKNESS	6.5mm (±0.5mm)
BACKING	Synth PVC Back™
NO. OF TILES/ BOX	20 pcs / 54sqft (5sqm)

## ENVIRONMENTAL SPECIFICATION

SUSTAINABILITY	Production that adheres to ISO14001 & ISO9001 standards
----------------	---

## PERFORMANCE SPECIFICATION

TVOCs	Within CRI limits of less than 0.5mg/m <sup>2</sup> /hour
FLAMMABILITY	Based on ASTM-D-2859 Pill Test - Result: 7/8
FLOORING RADIANT PANEL	Based on ASTM-E-648 - Result: ≥0.45 watts/cm <sup>2</sup>
STATIC PROPENSITY	Permanent Lifetime Protection - less than 3.5kv
ELECTROSTATIC PROPENSITY	Avg Neg. 0.4/0.3 kV
COLOUR FASTNESS TO LIGHT	Based on AATCC-16E Test - Result: 4/5
STAIN RESISTANCE	Based on AATCC-175-1993 - Result: 9 - No Residual Stain
DIMENSIONAL STABILITY	Warranted not to change in size by more than 2.4%
ROLL CHAIR	Based on ITTS 205 - Result: 3.0
TUFT BIND	Based on ASTM D 1335 - Result: 8.0 lbs

## CERTIFICATIONS



Certified to: GB/T 2755: 2005  
Certification No.: PC011916



Certified to: SIRIM ECO 035: 2012  
Certification No.: EL000212








AMAZON<sup>®</sup>ESSENTIALS<sup>®</sup>  
carpet tiles


PP

PVC

# SHOCKWAVE



Quarter Turn




## PRODUCT SPECIFICATION


CONSTRUCTION	1/12" Tufted Textured Loop Pile
FIBRE	MaxLustre PP
PILE WEIGHT	750g/m <sup>2</sup> or 22oz/yd <sup>2</sup>
PILE HEIGHT	2.6mm - 4.5mm (±0.5mm)
TOTAL THICKNESS	6.5mm (±0.5mm)
BACKING	Synth PVC Back™
NO. OF TILES/ BOX	20 pcs / 54sqft (5sqm)




M17-01  
SHOCKWAVE LATTE



M17-03  
SHOCKWAVE PEWTER



M17-05  
SHOCKWAVE LAPIS



M17-08  
SHOCKWAVE CHARCOAL







**AMAZON**ESSENTIALS®  
carpet tiles

## SHOCKWAVE

PVC


PP



M17-01  
SHOCKWAVE LATTE



Quarter Turn



M17-03  
SHOCKWAVE PEWTER



Quarter Turn



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

59





**AMAZON ESSENTIALS®**  
carpet tiles

## SHOCKWAVE

PVC


PP



M17-05  
SHOCKWAVE LAPIS



Quarter Turn



M17-08  
SHOCKWAVE CHARCOAL



Quarter Turn



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

60





**AMAZON ESSENTIALS®**  
carpet tiles

# SHOCKWAVE

PP

PVC

## PRODUCT SPECIFICATION

CONSTRUCTION	1/12" Tufted Textured Loop Pile
FIBRE	MaxLustre PP
PILE WEIGHT	750g/m <sup>2</sup> or 22oz/yd <sup>2</sup>
PILE HEIGHT	2.6mm - 4.5mm (±0.5mm)
TOTAL THICKNESS	6.5mm (±0.5mm)
BACKING	Synth PVC Back™
NO. OF TILES/ BOX	20 pcs / 54sqft (5sqm)

## ENVIRONMENTAL SPECIFICATION

SUSTAINABILITY	Production that adheres to ISO14001 & ISO9001 standards
----------------	---

## PERFORMANCE SPECIFICATION

TVOCs	Within CRI limits of less than 0.5mg/m <sup>2</sup> /hour
FLAMMABILITY	Based on ASTM-D-2859 Pill Test - Result: 7/8
FLOORING RADIANT PANEL	Based on ASTM-E-648 - Result: ≥0.45 watts/cm <sup>2</sup>
STATIC PROPENSITY	Permanent Lifetime Protection - less than 3.5kv
ELECTROSTATIC PROPENSITY	Avg Neg. 0.4/0.3 kV
COLOUR FASTNESS TO LIGHT	Based on AATCC-16E Test - Result: 4/5
STAIN RESISTANCE	Based on AATCC-175-1993 - Result: 9 - No Residual Stain
DIMENSIONAL STABILITY	Warranted not to change in size by more than 2.4%
ROLL CHAIR	Based on ITTS 205 - Result: 3.0
TUFT BIND	Based on ASTM D 1335 - Result: 8.0 lbs

## CERTIFICATIONS



Certified to: GB/T 2755 : 2005  
Certification No.: PC011916



Certified to: SIRIM ECO 035 : 2012  
Certification No.: EU000212








**AMAZON ESSENTIALS®**  
carpet tiles

PP


PVC

# SKYLAR


## NEUTRAL




Quarter Turn



Ashlar



Brick



### PRODUCT SPECIFICATION

**CONSTRUCTION** 1/10" Tufted Loop Pile

**FIBRE** Stainshield PP


**PILE WEIGHT** 544g/m<sup>2</sup> or 16oz/yd<sup>2</sup>

**PILE HEIGHT** 3.0mm

**TOTAL THICKNESS** 5.0mm

**BACKING** Synth PVC Back™


**NO. OF TILES/ BOX** 20 pcs / 54sqft (5sqm)




ES22-01  
METAL



ES22-02  
ESPRESSO



ES22-03  
MINERA



ES22-04  
CINDER



ES22-05  
ULTRAMARINE



ES22-06  
MARINA








**AMAZON ESSENTIALS®**  
carpet tiles

PP


PVC

# SKYLAR


## VIBRANT




Quarter Turn



Ashlar



Brick



## PRODUCT SPECIFICATION

**CONSTRUCTION** 1/10" Tufted Loop Pile

**FIBRE** Stainshield PP


**PILE WEIGHT** 544g/m<sup>2</sup> or 16oz/yd<sup>2</sup>

**PILE HEIGHT** 3.0mm

**TOTAL THICKNESS** 5.0mm

**BACKING** Synth PVC Back™


**NO. OF TILES/ BOX** 20 pcs / 54sqft (5sqm)




ES22-07  
**BERYL**




ES22-08  
**MEADOW**




ES22-09  
**SUNRAY**



ES22-10  
**BERRY**



ES22-11  
**ROSETTE**



ES22-12  
**CUSTARD**








**AMAZON ESSENTIALS®**  
carpet tiles


PP

PVC


# SKYLAR CONTRA




Quarter Turn



Ashlar



Brick



## PRODUCT SPECIFICATION

**CONSTRUCTION** 1/10" Tufted Loop Pile

**FIBRE** Stainshield PP

**PILE WEIGHT** 544g/m<sup>2</sup> or 16oz/yd<sup>2</sup>

**PILE HEIGHT** 3.0mm


**TOTAL THICKNESS** 5.0mm

**BACKING** Synth PVC Back™


**NO. OF TILES/ BOX** 20 pcs / 54sqft (5sqm)




ES22-13  
METAL BERYL




ES22-14  
ESPRESSO BERRY




ES22-15  
MINERA MEADOW



ES22-16  
CINDER SUNRAY



ES22-17  
ULTRAMARINE CUSTARD



ES22-18  
MARINA ROSETTE









## SKYLAR

PVC

PP



ES22-01  
METAL




ES22-07  
BERYL




ES22-13  
METAL BERYL




Quarter Turn



ES22-02  
ESPRESSO



ES22-10  
BERRY



ES22-14  
ESPRESSO BERRY



Quarter Turn








**AMAZON ESSENTIALS®**  
carpet tiles


## SKYLAR

PVC


PP



ES22-03  
MINERA




ES22-08  
MEADOW



ES22-15  
MINERA MEADOW



Quarter Turn




ES22-04  
CINDER



ES22-09  
SUNRAY



ES22-16  
CINDER SUNRAY

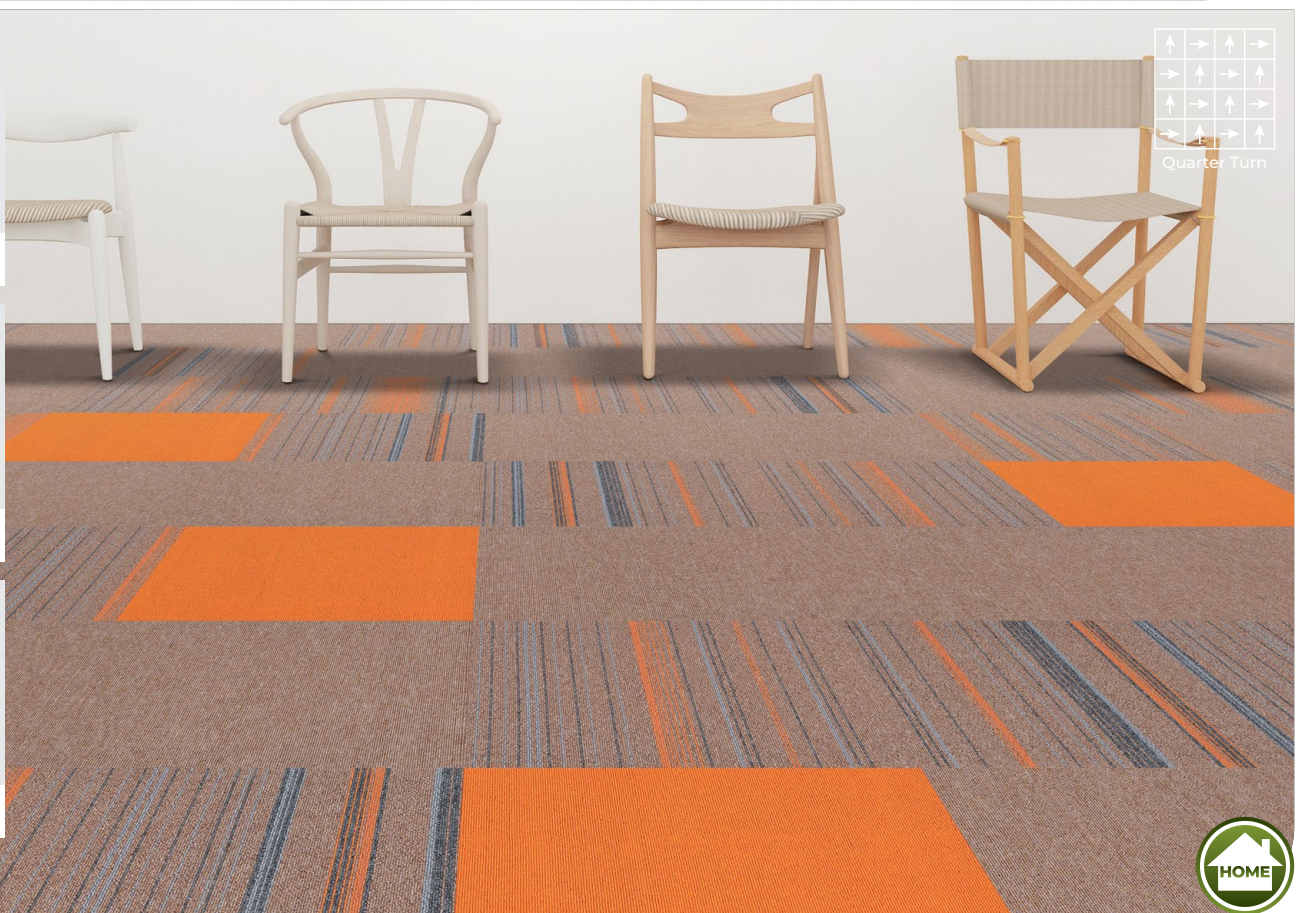

Quarter Turn



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

66





**AMAZON ESSENTIALS®**  
carpet tiles


## SKYLAR

PVC


PP



ES22-05  
ULTRAMARINE




ES22-12  
CUSTARD




ES22-17  
ULTRAMARINE CUSTARD




Quarter Turn



ES22-06  
MARINA



ES22-11  
ROSETTE



ES22-18  
MARINA ROSETTE



Quarter Turn



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

67





# AMAZON ESSENTIALS®

carpet tiles

## SKYLAR

### NEUTRAL + VIBRANT + CONTRA

PP

PVC

#### PRODUCT SPECIFICATION

CONSTRUCTION	1/12" Tufted Loop Pile
FIBRE	Stainshield PP
PILE WEIGHT	544g/m <sup>2</sup> or 16oz/yd <sup>2</sup> / 612g/m <sup>2</sup> or 18oz/yd <sup>2</sup> (Contra Only)
PILE HEIGHT	3.0mm
TOTAL THICKNESS	5.0mm
BACKING	Synth PVC Back™
NO. OF TILES/ BOX	20 pcs / 54sqft (5sqm)

#### ENVIRONMENTAL SPECIFICATION

TOTAL RECYCLED CONTENT	30% post-consumer recycled material
INDOOR AIR QUALITY	CRI Green Label Plus, Greenguard
END-OF-LIFE RECYCLING	Reloop Initiative
ENVIRONMENTAL QUALITY SYSTEM	ISO14001:2004

#### PERFORMANCE SPECIFICATION

FLAMMABILITY	ASTM-D-2859 Pill Test - Result: 8/8
FLOORING RADIANT PANEL	ASTM-E-648-17 - Result: ≥0.87 watts/cm <sup>2</sup>
STATIC PROPENSITY	AATCC 134-2011 - Result: Neg. 1.0
COLOR FASTNESS	AATCC 165 - Result: 5/5
STAIN RESISTANCE	AATCC-175-2003 - Result: 10 - No Residual Stain
DIMENSIONAL STABILITY	Warranted not to change in size by more than 3%
SMOKE DENSITY	ASTM E 662-15a - Result: Average 515
ROLL CHAIR	Based on ITTS 0025
TUFT BIND	ASTM D 1335 - Result: 6.4 lbs
PILING & FUZZING	Piling: 5, Fuzzing: 3

#### CERTIFICATIONS



Certified to: GB/T 2755; 2005  
Certification No.: PC011916



Certified to: SIRIM ECO 035: 2012  
Certification No.: EU000212








AMAZON ESSENTIALS<sup>®</sup>  
carpet tiles

PP


BITUMEN

# THESPIAN


## PART 1-2



Herringbone



Ashlar



## PRODUCT SPECIFICATION

**CONSTRUCTION** 1/10" Tufted Loop Pile

**FIBRE** Stainshield PP


**PILE WEIGHT** 544g/m<sup>2</sup> or 16oz/yd<sup>2</sup>

**PILE HEIGHT** 3.0mm


**TOTAL THICKNESS** 4.0 - 5.0mm

**BACKING** BioFlex Bitumen Back™


**NO. OF TILES/ BOX** 20 pcs / 54sqft (5sqm)




ES23-01 MASON



ES23-02 HARPER



ES23-03 ELON



ES23-04 GENESIS








AMAZON ESSENTIALS<sup>®</sup>  
carpet tiles

PP


BITUMEN

# THESPIAN


## PART 2-2



Herringbone



Ashlar



## PRODUCT SPECIFICATION

**CONSTRUCTION** 1/10" Tufted Loop Pile

**FIBRE** Stainshield PP


**PILE WEIGHT** 544g/m<sup>2</sup> or 16oz/yd<sup>2</sup>

**PILE HEIGHT** 3.0mm


**TOTAL THICKNESS** 4.0 - 5.0mm

**BACKING** BioFlex Bitumen Back™


**NO. OF TILES/ BOX** 20 pcs / 54sqft (5sqm)




ES23-05 MASON RED



ES23-06 HARPER BLUE



ES23-07 ELON GREEN



ES23-08 GENESIS BLUE








**AMAZON ESSENTIALS®**  
carpet tiles


## THE SPIAN

**BITUMEN**


**PP**




ES23-01 MASON



ES23-05 MASON RED



ES23-02 HARPER



ES23-06 HARPER BLUE

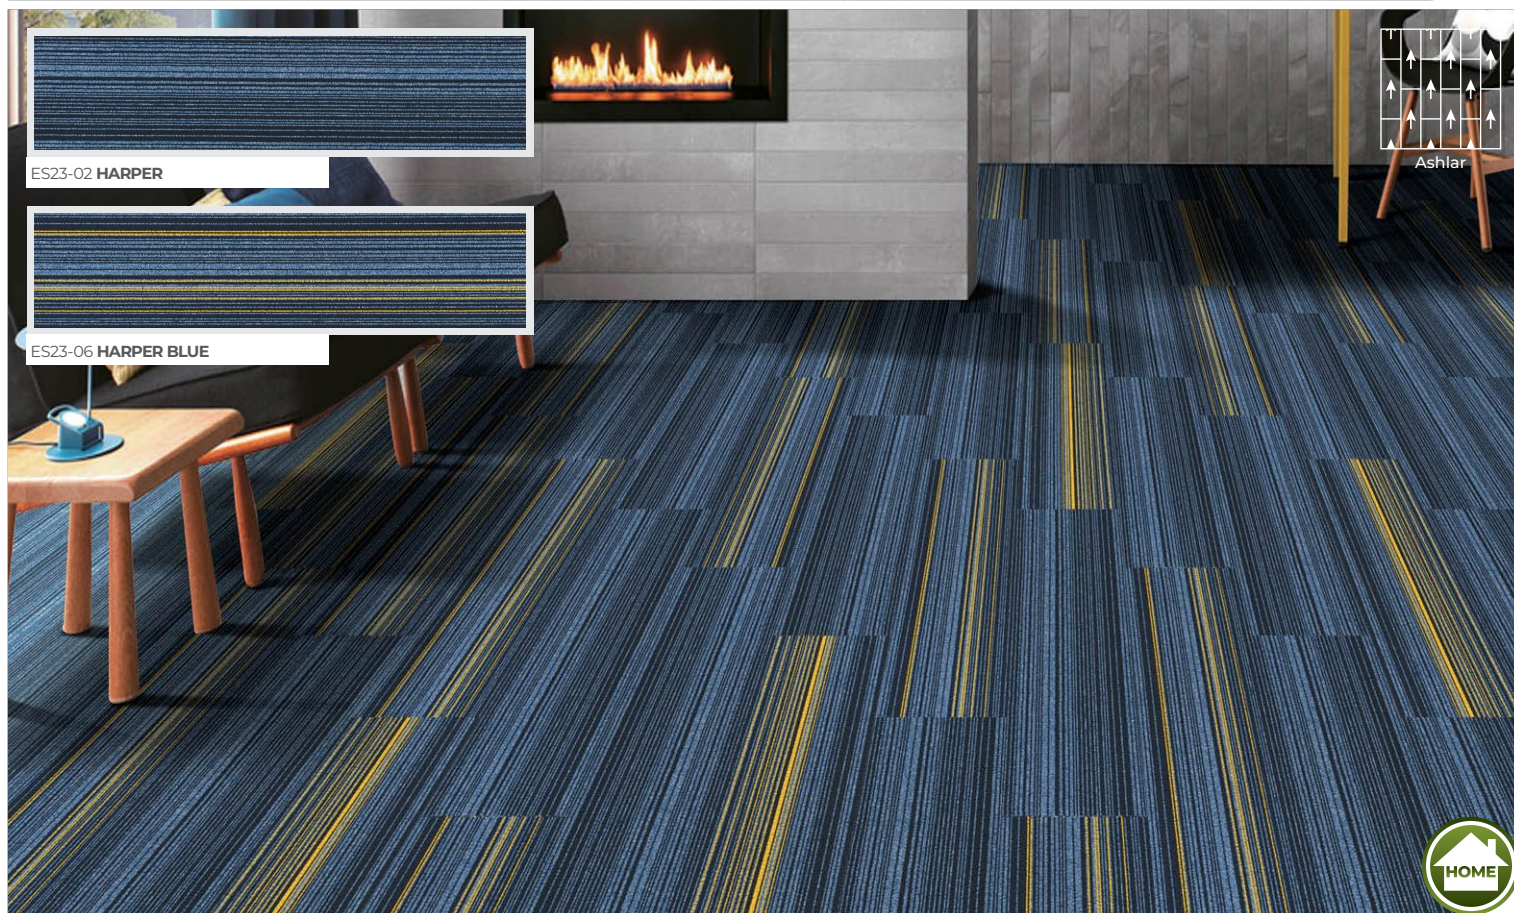


IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

71





**AMAZON ESSENTIALS®**  
carpet tiles

## THESPIAN

**BITUMEN**

**PP**




ES23-03 **ELON**



ES23-07 **ELON GREEN**



Ashlar



ES23-04 **GENESIS**



ES23-08 **GENESIS BLUE**



Herringbone



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

72





**AMAZON ESSENTIALS®**  
carpet tiles

# THESPIAN

PP

BITUMEN

## PRODUCT SPECIFICATION

CONSTRUCTION	1/10" Tufted Loop Pile
FIBRE	Stainshield PP
PILE WEIGHT	544g/m <sup>2</sup> or 16oz/yd <sup>2</sup>
PILE HEIGHT	3.0mm
TOTAL THICKNESS	4.0 - 5.0mm
BACKING	BioFlex Bitumen Back™
NO. OF TILES/ BOX	20 pcs / 54sqft (5sqm)

## ENVIRONMENTAL SPECIFICATION

TOTAL RECYCLED CONTENT	30% post-consumer recycled material
INDOOR AIR QUALITY	CRI Green Label Plus, Greenguard
END-OF-LIFE RECYCLING	Reloop Initiative
ENVIRONMENTAL QUALITY SYSTEM	ISO14001:2004

## PERFORMANCE SPECIFICATION

FLAMMABILITY	ASTM-D-2859 Pill Test - Result: 8/8
FLOORING RADIANT PANEL	ASTM-E-648-17 - Result: $\geq 0.87$ watts/cm <sup>2</sup>
STATIC PROPENSITY	AATCC 134-2011 - Result: Neg. 1.0
COLOR FASTNESS	AATCC 165 - Result: 5/5
STAIN RESISTANCE	AATCC-175-2003 - Result: 10 - No Residual Stain
DIMENSIONAL STABILITY	Warranted not to change in size by more than 3%
SMOKE DENSITY	ASTM E 662-15a - Result: Average 515
ROLL CHAIR	Based on ITTS 0025
TUFT BIND	ASTM D 1335 - Result: 6.4 lbs
PILING & FUZZING	Piling: 5, Fuzzing: 3

## CERTIFICATIONS



Certified to: GB/T 2755 - 2005  
Certification No.: PC011916



Certified to: SIRIM ECO 035 - 2012  
Certification No.: EL000212








**AMAZON ESSENTIALS®**  
carpet tiles


PP

BITUMEN

# COSMIC



Quarter Turn



## PRODUCT SPECIFICATION

**CONSTRUCTION** 1/12" Multi-level Loop

**FIBRE** MaxLustre PP


**PILE WEIGHT** 610g/m<sup>2</sup> or 18oz/yd<sup>2</sup>

**PILE HEIGHT** 2.5 - 3.5mm


**TOTAL THICKNESS** 4.5 - 5.5mm

**BACKING** BioFlex Bitumen Back™


**NO. OF TILES/ BOX** 20 pcs / 54sqft (5sqm)



M9016-2  
COSMIC SHADOW



M9016-3  
COSMIC PEBBLE



M9016-6  
COSMIC DENIM



M9016-7  
COSMIC BEIGE







**AMAZON ESSENTIALS<sup>®</sup>**  
carpet tiles

## COSMIC

**BITUMEN**

**PP**



M9016-2  
**COSMIC SHADOW**



Quarter Turn



M9016-3  
**COSMIC PEBBLE**



Quarter Turn



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

75






**AMAZON ESSENTIALS®**  
carpet tiles


## COSMIC

**BITUMEN**

**PP**




M9016-6  
**COSMIC DENIM**



Quarter Turn



M9016-7  
**COSMIC BEIGE**



Quarter Turn



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

76





**AMAZON ESSENTIALS®**  
carpet tiles

# COSMIC

**PP**

**BITUMEN**

## PRODUCT SPECIFICATION

CONSTRUCTION	1/12" Multi-level Loop
FIBRE	MaxLustre PP
PILE WEIGHT	610g/m <sup>2</sup> or 18oz/yd <sup>2</sup>
PILE HEIGHT	2.5 - 3.5mm
TOTAL THICKNESS	4.5 - 5.5mm
BACKING	BioFlex Bitumen Back™
NO. OF TILES/ BOX	20 pcs / 54sqft (5sqm)

## ENVIRONMENTAL SPECIFICATION

SUSTAINABILITY	Production that adheres to ISO14001 and ISO9001 with all yarns used are Solution dyed to minimize use of water and exclude any effluent.
----------------	--

## PERFORMANCE SPECIFICATION

STATIC ELECTRICITY	Permanent lifetime protection - less than 3.5kV
LODGING-RESISTANCE	Superior fibre resistance
WEAR WARRANTY	Warranted not to lose more than 15% pile fibre by weight under normal commercial use within 15 years
DIMENSIONAL STABILITY	Warranted not to change in size by more than 0.5mm, as well as resistant to doming and dishing under normal use.
COLOR FASTNESS TO RUBBING	GB/T3920-2008 Standard: >Grade 4 for dry rubbing >Grade 3 for wet rubbing

## CERTIFICATIONS



Certified to: GB/T 2755 : 2005  
Certification No. : PC011916



Certified to: SIRIM ECO 035 : 2012  
Certification No. : EU000212








**AMAZON ESSENTIALS®**  
carpet tiles


PP

PVC


# MIMIC




Quarter Turn



Ashlar



Brick



## PRODUCT SPECIFICATION

**CONSTRUCTION** 1/12" Multi-level Loop

**FIBRE** MaxLustre PP

**PILE WEIGHT** 750g/m<sup>2</sup> or 22oz/yd<sup>2</sup>

**PILE HEIGHT** 2.5 - 3.5mm


**TOTAL THICKNESS** 5.0 - 6.0mm

**BACKING** Synth PVC Back™


**NO. OF TILES/ BOX** 20 pcs / 54sqft (5sqm)




M9017-1  
MIMIC PEBBLE



M9017-2  
MIMIC SHADOW



M9017-3  
MIMIC DENIM



M9017-4  
MIMIC BEIGE







**AMAZON ESSENTIALS®**  
carpet tiles

## MIMIC

PVC

PP



M9017-1  
**MIMIC PEBBLE**



M9017-2  
**MIMIC SHADOW**



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

79






**AMAZON ESSENTIALS®**  
carpet tiles


## MIMIC

PVC

PP




M9017-3  
MIMIC DENIM



Brick



M9017-4  
MIMIC BEIGE



Quarter Turn



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

80





**AMAZON ESSENTIALS®**  
carpet tiles

# MIMIC

PP

PVC

## PRODUCT SPECIFICATION

**CONSTRUCTION** 1/12" Multi-level Loop

**FIBRE** MaxLustre PP

**PILE WEIGHT** 750g/m<sup>2</sup> or 22oz/yd<sup>2</sup>

**PILE HEIGHT** 2.5 - 3.5mm

**TOTAL THICKNESS** 5.0 - 6.0mm

**BACKING** Synth PVC Back™

**NO. OF TILES/ BOX** 20 pcs / 54sqft (5sqm)

## ENVIRONMENTAL SPECIFICATION

**SUSTAINABILITY** Production that adheres to ISO14001 and ISO9001 with all yarns used are Solution dyed to minimize use of water and exclude any effluent.

## PERFORMANCE SPECIFICATION

**STATIC ELECTRICITY** Permanent lifetime protection - less than 3.5kV

**LODGING-RESISTANCE** Superior fibre resistance

**WEAR WARRANTY** Warranted not to lose more than 15% pile fibre by weight under normal commercial use within 15 years

**DIMENSIONAL STABILITY** Warranted not to change in size by more than 0.5mm, as well as resistant to doming and dishing under normal use.

**COLOR FASTNESS TO RUBBING** GB/T3920-2008 Standard:  
>Grade 4 for dry rubbing  
>Grade 3 for wet rubbing

## CERTIFICATIONS



Certified to: GB/T 2755 : 2005  
Certification No.: PC011916



Certified to: SIRIM ECO 035 : 2012  
Certification No.: EU000212








**AMAZON ESSENTIALS®**  
carpet tiles


PP

PVC


# MAJESTIC




Quarter Turn



Ashlar



Brick



## PRODUCT SPECIFICATION

CONSTRUCTION	1/12" Multi-level Loop
FIBRE	MaxLustre PP
PILE WEIGHT	750g/m <sup>2</sup> or 22oz/yd <sup>2</sup>
PILE HEIGHT	2.5 - 3.5mm
TOTAL THICKNESS	5.0 - 6.0mm
BACKING	Synth PVC Back™
NO. OF TILES/ BOX	20 pcs / 54sqft (5sqm)




M9018-1  
MAJESTIC PEBBLE



M9018-2  
MAJESTIC SHADOW



M9018-3  
MAJESTIC DENIM



M9018-4  
MAJESTIC BEIGE







**AMAZON ESSENTIALS®**  
carpet tiles


## MAJESTIC

PVC

PP




M9018-1  
MAJESTIC PEBBLE



Ashlar



M9018-2  
MAJESTIC SHADOW



Quarter Turn



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

83






**AMAZON ESSENTIALS®**  
carpet tiles


## MAJESTIC

PVC

PP




M9018-3  
MAJESTIC DENIM



Brick



M9018-4  
MAJESTIC BEIGE



Quarter Turn



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

84





**AMAZON ESSENTIALS®**  
carpet tiles

# MAJESTIC

**PP**

**PVC**

## PRODUCT SPECIFICATION

**CONSTRUCTION** 1/12" Multi-level Loop

**FIBRE** MaxLustre PP

**PILE WEIGHT** 750g/m<sup>2</sup> or 22oz/yd<sup>2</sup>

**PILE HEIGHT** 2.5 - 3.5mm

**TOTAL THICKNESS** 5.0 - 6.0mm

**BACKING** Synth PVC Back™

**NO. OF TILES/ BOX** 20 pcs / 54sqft (5sqm)

## ENVIRONMENTAL SPECIFICATION

**SUSTAINABILITY** Production that adheres to ISO14001 and ISO9001 with all yarns used are Solution dyed to minimize use of water and exclude any effluent.

## PERFORMANCE SPECIFICATION

**STATIC ELECTRICITY** Permanent lifetime protection - less than 3.5kV

**LODGING-RESISTANCE** Superior fibre resistance

**WEAR WARRANTY** Warranted not to lose more than 15% pile fibre by weight under normal commercial use within 15 years

**DIMENSIONAL STABILITY** Warranted not to change in size by more than 0.5mm, as well as resistant to doming and dishing under normal use.

**COLOR FASTNESS TO RUBBING** GB/T3920-2008 Standard:  
>Grade 4 for dry rubbing  
>Grade 3 for wet rubbing

## CERTIFICATIONS



Certified to: GB/T 2755 : 2005  
Certification No.: PC011916



Certified to: SIRIM ECO 035 : 2012  
Certification No.: EL000212








**AMAZON ESSENTIALS®**  
carpet tiles


PP

PVC


# GALACTIC




Quarter Turn



Ashlar



Brick



## PRODUCT SPECIFICATION

**CONSTRUCTION** 1/12" Multi-level Loop

**FIBRE** MaxLustre PP

**PILE WEIGHT** 750g/m<sup>2</sup> or 22oz/yd<sup>2</sup>

**PILE HEIGHT** 2.5 - 3.5mm

**TOTAL THICKNESS** 5.0 - 6.0mm

**BACKING** Synth PVC Back™


**NO. OF TILES/ BOX** 20 pcs / 54sqft (5sqm)



M9019-1  
**GALACTIC PEBBLE**



M9019-2  
**GALACTIC SHADOW**



M9019-3  
**GALACTIC DENIM**



M9019-4  
**GALACTIC BEIGE**







**AMAZON ESSENTIALS®**  
carpet tiles


## GALACTIC

PVC

PP



M9019-1  
GALACTIC PEBBLE



Ashlar



M9019-2  
GALACTIC SHADOW



Quarter Turn



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

87





**AMAZON ESSENTIALS®**  
carpet tiles

## GALACTIC

PVC

PP



M9019-3  
GALACTIC DENIM



M9019-4  
GALACTIC BEIGE



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

88





**AMAZON ESSENTIALS®**  
carpet tiles

# GALACTIC

PP

PVC

## PRODUCT SPECIFICATION

CONSTRUCTION	1/12" Multi-level Loop
FIBRE	MaxLustre PP
PILE WEIGHT	750g/m <sup>2</sup> or 22oz/yd <sup>2</sup>
PILE HEIGHT	2.5 - 3.5mm
TOTAL THICKNESS	5.0 - 6.0mm
BACKING	Synth PVC Back™
NO. OF TILES/ BOX	20 pcs / 54sqft (5sqm)

## ENVIRONMENTAL SPECIFICATION

SUSTAINABILITY	Production that adheres to ISO14001 and ISO9001 with all yarns used are Solution dyed to minimize use of water and exclude any effluent.
----------------	--

## PERFORMANCE SPECIFICATION

STATIC ELECTRICITY	Permanent lifetime protection - less than 3.5kV
LODGING-RESISTANCE	Superior fibre resistance
WEAR WARRANTY	Warranted not to lose more than 15% pile fibre by weight under normal commercial use within 15 years
DIMENSIONAL STABILITY	Warranted not to change in size by more than 0.5mm, as well as resistant to doming and dishing under normal use.
COLOR FASTNESS TO RUBBING	GB/T3920-2008 Standard: >Grade 4 for dry rubbing >Grade 3 for wet rubbing

## CERTIFICATIONS



Certified to: GB/T 2755 : 2005  
Certification No.: PC011916



Certified to: SIRIM ECO 035 : 2012  
Certification No.: EL000012








**AMAZON ESSENTIALS®**  
carpet tiles

**PP**


**BITUMEN**

# WARBLE


## PART 1-2



Herringbone



Ashlar



## PRODUCT SPECIFICATION

CONSTRUCTION	1/12" Tufted Loop Pile
FIBRE	MaxLustre PP
PILE WEIGHT	678g/m <sup>2</sup> or 20oz/yd <sup>2</sup>
PILE HEIGHT	3.0 - 4.5mm
TOTAL THICKNESS	6.0 - 7.0mm
BACKING	BioFlex Bitumen ECO Back™
NO. OF TILES/ BOX	20 pcs / 54sqft (5sqm)



M9020-2 **WARBLE GREY**



M9020-3 **WARBLE STONE**



M9020-4 **WARBLE GRAPHITE**



M9020-7 **WARBLE SAND**








**AMAZON ESSENTIALS®**  
carpet tiles

PP


BITUMEN

# WARBLE


## PART 2-2



Herringbone




Ashlar



## PRODUCT SPECIFICATION

CONSTRUCTION	1/12" Tufted Loop Pile
FIBRE	MaxLustre PP
PILE WEIGHT	678g/m <sup>2</sup> or 20oz/yd <sup>2</sup>
PILE HEIGHT	3.0 - 4.5mm
TOTAL THICKNESS	6.0 - 7.0mm
BACKING	BioFlex Bitumen ECO Back™
NO. OF TILES/ BOX	20 pcs / 54sqft (5sqm)



M9020-22 WARBLE GREY BLUE



M9020-33 WARBLE STONE GREEN



M9020-44 WARBLE GRAPHITE RED



M9020-77 WARBLE SAND YELLOW







**AMAZON ESSENTIALS®**  
carpet tiles


## WARBLE

**BITUMEN**


**PP**



M9020-2 **WARBLE GREY**



M9020-22 **WARBLE GREY BLUE**




Ashlar



M9020-3 **WARBLE STONE**



M9020-33 **WARBLE STONE GREEN**



Ashlar



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

92





**AMAZON ESSENTIALS®**  
carpet tiles

## WARBLE

**BITUMEN**

**PP**



M9020-4 **WARBLE GRAPHITE**



M9020-44 **WARBLE GRAPHITE RED**




Herringbone



M9020-7 **WARBLE SAND**



M9020-77 **WARBLE SAND YELLOW**



Herringbone



IMAGE COLOURS MAY DIFFER FROM THE ACTUAL PRODUCT

AMAZON  
ESSENTIALS

93





**AMAZON ESSENTIALS®**  
carpet tiles

# WARBLE

**PP**

**BITUMEN**

## PRODUCT SPECIFICATION

CONSTRUCTION	1/12" Tufted Loop Pile
FIBRE	MaxLustre PP
PILE WEIGHT	678g/m <sup>2</sup> or 20oz/yd <sup>2</sup>
PILE HEIGHT	3.0 - 4.5mm
TOTAL THICKNESS	6.0 - 7.0mm
BACKING	BioFlex Bitumen ECO Back™
NO. OF TILES/ BOX	20 pcs / 54sqft (5sqm)

## ENVIRONMENTAL SPECIFICATION

SUSTAINABILITY	Production that adheres to ISO14001 and ISO9001 with all yarns used are Solution dyed to minimize use of water and exclude any effluent.
----------------	--

## PERFORMANCE SPECIFICATION

STATIC ELECTRICITY	Permanent lifetime protection - less than 3.5kV
LODGING-RESISTANCE	Superior fibre resistance
WEAR WARRANTY	Warranted not to lose more than 15% pile fibre by weight under normal commercial use within 15 years
DIMENSIONAL STABILITY	Warranted not to change in size by more than 0.5mm, as well as resistant to doming and dishing under normal use.
COLOR FASTNESS TO RUBBING	GB/T3920-2008 Standard: >Grade 4 for dry rubbing >Grade 3 for wet rubbing

## CERTIFICATIONS





## CARE & MAINTENANCE

The better you care for your carpet, the longer it lasts. Proper care, along with a consistent maintenance programme can dramatically extend the life of your carpet, while prolonging appearance and colour.

- 1** When moving furniture onto carpet, do not drag across the floor to prevent loosening or unravelling of the yarn. Also ensure items are carefully and lightly placed onto the floor to minimise indentations.
- 2** Use appropriate protectors on furniture or use chair pads to lower the degree of wear and tear over extended use.
- 3** It is recommended to place a dirt-trapping mat at the entrance doorway to reduce tracked-in dirt, stains and moisture.
- 4** Attend to spills immediately with an absorbent paper towel to prevent the spill from turning into a permanent stain. Remember to blot the spill and not rub as this will spread the stain deeper into the fibres.

- 5** Most spills and stains, when attended to immediately, can be removed with water and paper towel. Use solvent or detergent only as a last resort to prevent the colour of your carpet to wear-off at the stain spot. Test solvents and detergents on an inconspicuous area before applying.
- 6** Regular vacuuming is the most important aspect of carpet maintenance. As most modern carpets are engineered to hold dirt and dust within the yarn pile, it is recommended to vacuum the carpet based on the amount of traffic a particular carpeted area experiences. Heavy traffic areas require daily vacuuming while light traffic areas can be vacuumed once a week.
- 7** Scheduled deep cleaning is recommended based on the volume of foot traffic in a carpeted area. This usually involves the use of professional carpet cleaners that will wet clean the carpet to extract dirt and soil embedded deep within the carpet fibres. A deep clean will have restorative effects and extend the life of the carpet.

## SPOT REMOVAL GUIDE

Stubborn stains, if not treated immediately, can ruin the look and feel of any carpet. Just use these steps to get tough stains off your carpet the easy, fast and safe way.

### STEP 1 | IDENTIFY THE STAIN AND CLEAN ACCORDINGLY

#### ALCOHOL, COFFEE, TEA OR LIQUID FOOD SPOTS

- Blot surplus spills
- Use detergent + vinegar solution to dab off stain from outer edge of stain
- Frequently blot with dry cloth

#### SOLIDS, FATS, TAR, CHEWING GUM, OILS OR OINTMENT

- Scrape excess off with blunt knife
- Dry blot the area first, followed by detergent + vinegar solution
- Blot until dry

#### CHOCOLATE, SWEETS, ICE CREAM, SOFT DRINKS OR BLOOD

- Scrape excess off with blunt knife
- Use detergent to dab off stain from outer edge of stain
- Continue with Ammonia solution and then blot until dry

#### PIZZA, TOMATO SAUCES & UNKNOWN STAINS

- Scrape or blot surplus spillage
- Dry blot the area first, followed by warm water, then blot dry
- If required, continue with detergent solution and blot dry

### STEP 2 | FINAL RINSE

- Spray area with a mixture of one part white vinegar and four parts water
- Blot dampened area to remove excess moisture
- Spread a clean, white towel over the area and place a weight on top
- Leave for 5 hours or overnight to absorb moisture and stain residue
- Repeat process if necessary



# INSTALLATION GUIDE

Proper installation is a critical element to ensure Amazon Carpet Tiles continue to provide years and years of worry-free use. Be it DIY or with the use of professional installers, it is encouraged to adhere to appropriate installation methods to get the best of out of your Amazon Carpet Tiles.

## SUBFLOOR PREPARATION

Before laying a single piece of Amazon Carpet Tile, the subfloor must be smooth, firm, flat, clean, dry and free from defects. In addition, the following must be strictly adhered to:

- Room temperature of installation site must be between 18°C (65°F) and 36°C (95°F) prior to installation
- Humidity level must be monitored and maintained at 10% to 65% relative humidity
- All adhesives and flooring must be kept in the same environment to acclimatise at least 24 hours before installation begins. All flooring must be unpacked, and if possible loose laid, to acclimatise
- Ensure no traces of water or moisture is present in any subfloor type. Conduct a moisture test if unsure as moisture retention is the leading cause of installation failure

The above is vital to ensure good adhesion and great aesthetic appearance; as well as minimise flaws or irregularities from showing.

Preparation methods also differ with the type and condition of existing subfloor, as follows:

### EXISTING SUBFLOOR TYPE

#### RESILIENT VINYL

- Damaged tiles to be replaced or patched with underlay
- Scrape all residue such as adhesives, paint and dirt from the subfloor
- Floor must be level and free from any blemishes
- Dry mop and sweep entire floor to remove surface sand, soil and debris
- Ensure that the subfloor is completely dry

#### WOOD

- It is recommended to use a plywood underlay over the existing hardwood
- All holes, indentations and open joints must be repaired and sealed
- The underlay board must be smooth, clean, dry and dust free

#### CONCRETE

- Any polish, paint, residue must be completely removed from the subfloor
- In newly constructed buildings, please allow drying time of 7 to 14 days to ensure no moisture is retained
- Ensure floor surface is level and free from any blemishes. Use a scraper to flatten surface if necessary
- Dry mop and sweep entire floor to remove surface sand, soil and debris
- Ensure that the subfloor is completely dry

#### CERAMIC, TERRAZZO OR MOSAIC TILES

- Check for loose, unstable or broken tiles
- Remove loose pieces and then fill the holes. Ensure to smoothen and level the filled out surface
- Use a filler or primer to fill all old tile grout lines to prevent sinking of carpet tiles
- Ensure floor surface is level and free from any blemishes. Use a scraper to flatten surface if necessary
- Dry mop and sweep entire floor to remove surface sand, soil and debris
- Ensure that the subfloor is completely dry

Please ensure that proper protective gear such as breathing masks are worn at all times during subfloor prep and installation to protect against inhaling dust, particles and fumes.



# INSTALLATION GUIDE

Once the subfloor is properly prepared, the laying work becomes that much easier. However, it is recommended that installation is conducted according to standard practises to ensure your Amazon Carpet Tiles retains its durability, resilience and beauty. It is important to have all requisite tools at hand such as rulers, cutters, adhesives, spreaders, rollers and compass dividers before commencing the installation.

**1** Check to ensure the products you have are sufficient for the installation space and are of the same batch and/or lot number. Differing batch or lot numbers can create slightly uneven colour consistency or shading issues when installed.

**2** Plan the layout of the installation by finding the exact centre of the room. Divide the room into equal quadrants by making two perpendicular lines on the subfloor intersecting at the centre point.

**3** All carpet tile designs come with an arrow printed on the backing side. This works as a guide that helps ensure that the laying pattern you choose is consistent throughout the installation. Common laying patterns are as follows:

**4** Pick a quadrant to start and begin applying adhesive, remember only to use Amazon-approved adhesives to prevent void of our structural warranty. Adhesives are also highly-flammable, avoid all contact with open flames or sparks.

**5** Work on small portions of the underfloor at a time when applying adhesive, optimum adhesive usage is 0.3 to 0.45 kg per square metre. Be sure to smoothen out the adhesive and make sure no adhesive puddle is present.

**6** Approximately 20 to 30 minutes after applying adhesive, or when the adhesive becomes tacky, begin laying the tiles.

**7** Leave a distance of 1mm from the wall and the edge of the tile and always remember to press the tiles down as you lay for maximum adhesion.

**8** It is recommended to roll the floor upon installation to ensure the tiles are firmly stuck to the surface of the underfloor. Newly laid carpet tiles needs time to cure, so avoid moving furniture onto floor for at least 24 hours after installation.

**9** To minimise the wear on new carpets, especially when castor chairs are used at the installation site, it is recommended to use chair pads. This will prolong the appearance of the carpet at heavy traffic and usage areas.







**AMAZON ESSENTIALS®**  
carpet tiles

# 2025

COLLECTION

## AMAZON ESSENTIALS BROCHURE

GAMBIT | UNITY | PULSE | DECADE |  
CENTURY | MILLENNIAL | BASE |  
MESH | TANGLE | BLOCK | BASELINE |  
SHOCKWAVE | SKYLAR | THESPIAN |  
COSMIC<sup>NEW</sup> | MIMIC<sup>NEW</sup> | MAJESTIC<sup>NEW</sup> |  
GALACTIC<sup>NEW</sup> | WARBLE<sup>NEW</sup>



**AMAZON®**  
unlocking imaginations

© Amazon Flooring International

All trademarks indicated in this publication are property of their respective owners. Information and specifications contained herein are accurate at the time of printing and may change without notice. All images are for illustration purposes only and colours of actual product may differ from the images contained herein.